


PARKSIDE

LYRICAL

CERAMIC WALL TILES

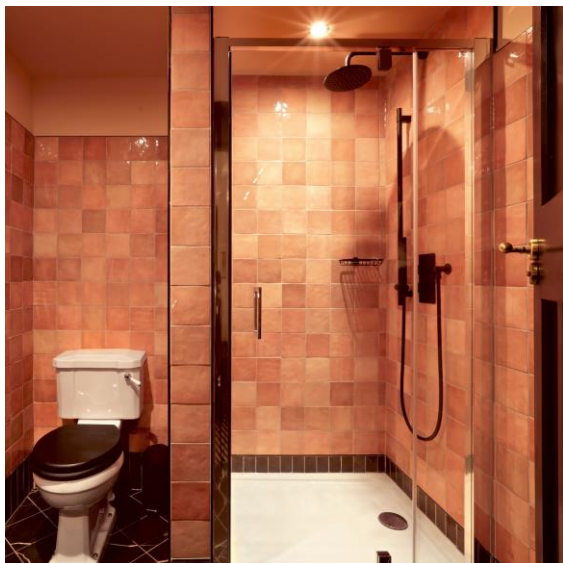

10

COLOURS

2

SIZES

1

FINISH

0

SPECIAL PIECES



0%

Lyrical is a striking wall tile collection inspired by traditional zellige tiles.

Available in 65x200mm and 132x132mm and ten striking colours, each featuring natural colour variation and a beautiful gloss finish.

COLOURS AVAILABLE



SIZE GUIDE

65x200mm

132x132mm

PARKSIDE

PRODUCT DATA SHEET

LYRICAL



| | |
|--------------------|----------|
| Dimensions | Multiple |
| Finish | Glazed |
| Body | Ceramic |
| Wall/Floor | Wall |
| Group | BIII |
| Pendulum Dry (4S) | - |
| Pendulum Wet (4S) | - |
| Pendulum Wet (TRL) | - |

| Available Sizes | | Standard | Requirement | Typical Test Value |
|-----------------------|--------------------------------|--------------|-----------------------------------|--------------------|
| 132x132mm 200x65mm | Length & Width | ISO 10545-2 | $\pm 0.5\% \leq 2\text{mm}$ | Pass |
| | Thickness | ISO 10545-2 | $\pm 10\% \leq \pm 0.5\text{mm}$ | Pass |
| | Straightness | ISO 10545-2 | $\pm 0.3\% \leq \pm 1.5\text{mm}$ | NPD |
| | Flatness | ISO 10545-2 | $\pm 0.5\% \leq \pm 2.0\text{mm}$ | Pass |
| | Rectangularity | ISO 10545-2 | $\pm 0.5\% \leq \pm 2.0\text{mm}$ | NPD |
| | Water Absorption | ISO 10545-3 | $E_b > 10\%$ | Pass |
| | Breaking strength | ISO 10545-4 | $\geq 600\text{N}$ | Pass |
| | Modulus of rupture | ISO 10545-4 | 12 N/mm ² Average min | Pass |
| | Resistance to surface abrasion | ISO 10545-7 | n/a | NPD |
| | Frost Resistance | ISO 10545-12 | Complies with Standard | NPD |
| | Thermal Shock Resistance | ISO 10545-9 | Complies with Standard | Pass |
| | Resistance to Stain | ISO 10545-14 | Min class 3 | Pass |
| | Resistance to chemicals | ISO 10545-14 | Min Class B | Pass |
| | Reaction to Fire | - | Floor/Wall class A1 FL/A1 | Pass |

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

PARKSIDE

PRODUCT DATA SHEET

LYRICAL - GOLD



| | |
|--------------------|----------|
| Dimensions | Multiple |
| Finish | Glazed |
| Body | Ceramic |
| Wall/Floor | Wall |
| Group | BIII |
| Pendulum Dry (4S) | - |
| Pendulum Wet (4S) | - |
| Pendulum Wet (TRL) | - |

| Available Sizes | |
|-----------------------|----|
| 132x132mm 200x65mm | |
| Recycled Content | % |
| Lyrical | 0% |

| | Standard | Requirement | Typical Test Value |
|--------------------------------|--------------|--|--------------------|
| Length & Width | ISO 10545-2 | $\pm 0.5\% \leq 2\text{mm}$ | Pass |
| Thickness | ISO 10545-2 | $\pm 10\%$ $\leq \pm 0.5\text{mm}$ | Pass |
| Straightness | ISO 10545-2 | $\pm 0.3\%$ $\leq \pm 1.5\text{mm}$ | NPD |
| Flatness | ISO 10545-2 | $\pm 0.5\%$ $\leq \pm 2.0\text{mm}$ | Pass |
| Rectangularity | ISO 10545-2 | $\pm 0.5\%$ $\leq \pm 2.0\text{mm}$ | NPD |
| Water Absorption | ISO 10545-3 | $E_b > 10\%$ | Pass |
| Breaking strength | ISO 10545-4 | $\geq 600\text{N}$ | Pass |
| Modulus of rupture | ISO 10545-4 | 12 N/mm ² Average min | Pass |
| Resistance to surface abrasion | ISO 10545-7 | n/a | NPD |
| Frost Resistance | ISO 10545-12 | Complies with Standard | NPD |
| Thermal Shock Resistance | ISO 10545-9 | Complies with Standard | Pass |
| Resistance to Stain | ISO 10545-14 | Min class 3 | NPD |
| Resistance to chemicals | ISO 10545-14 | Min Class B | NPD |
| Reaction to Fire | - | Floor/Wall class A1 FL/A1 | Pass |

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential