

PARKSIDE

ARRANGE | TOM PIGEON

BESPOKE CERAMIC WALL TILES



8

COLOURS

2

SIZES

1

FINISH

0

SPECIAL PIECES


ARRANGE is a white bodied, ceramic wall tile collection of five geometric designs available in seven colours which can be used alongside coloured square and rectangular tiles. The colours have a subtle gloss finish to contrast with the matt of the cool grey. The designs are bold yet simple and can be used in infinite combinations to create a huge array of contemporary or more traditional patterns.

Each individual tile is treated as a piece of art with every tile being carefully selected, before being hand decorated by highly experienced artisans using traditional lithographic prints. The craft process of traditional lithography offers a depth, precision and durability of colour unattainable by other decorative processes. Bespoke production runs of coordinating glazed tiles complete the range.


COLOURS AVAILABLE



PATTERNS AVAILABLE

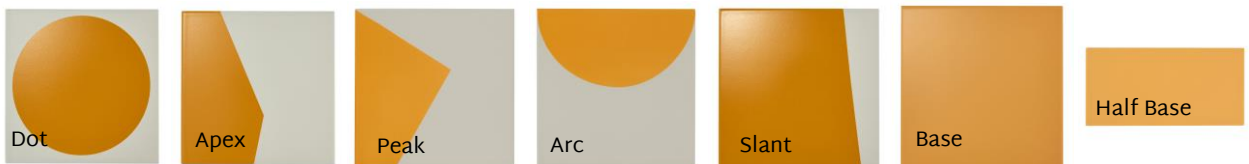

SIZE GUIDE

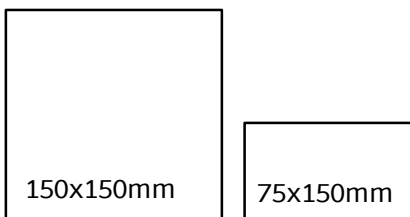

PARKSIDE

PRODUCT DATA SHEET

ARRANGE | TOM PIGEON



Dimensions	Multiple
Finish	Matt
Body	Ceramic
Wall/Floor	Wall
Interior/ Exterior	Interior
Group	BIII
Pendulum Dry (4S)	-
Pendulum Wet (4S)	-
Pendulum Wet (TRL)	-

Available Sizes	Standard	Requirement	Typical Test Value	
150x150x8mm 75x150x8mm	Length & Width	ISO 10545-2	$\pm 0.5\% \leq 2\text{mm}$	Pass
	Thickness	ISO 10545-2	$\pm 10\%$ $\leq \pm 0.5\text{mm}$	Pass
	Straightness	ISO 10545-2	$\pm 0.3\%$ $\leq \pm 1.5\text{mm}$	Pass
	Flatness	ISO 10545-2	$\pm 0.5\%$ $\leq \pm 2.0\text{mm}$	Pass
	Rectangularity	ISO 10545-2	$\pm 0.5\%$ $\leq \pm 2.0\text{mm}$	Pass
	Water Absorption	ISO 10545-3	$E_b > 10\%$	Pass
	Breaking strength	ISO 10545-4	$\geq 600\text{N}$	
	Modulus of rupture	ISO 10545-4	15 N/mm ² Average min	Pass
	Resistance to surface abrasion	ISO 10545-7	n/a	NPD
	Frost Resistance	ISO 10545-12	Complies with Standard	Not resistant
	Thermal Shock Resistance	ISO 10545-9	Complies with Standard	Pass
	Resistance to Stain	ISO 10545-14	Min class 3	Pass
	Resistance to chemicals	ISO 10545-14	Min Class B	Pass
	Reaction to Fire	-	Floor/Wall class A1 FL/A1	Pass

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential