



3

COLOURS

2

SIZES

1

FINISH

0

SPECIAL PIECES


Duggan is inspired by the beautiful Ceppo Stone found in Northern Italy.

Agglomerate pieces of sawn stone reflects a minimal confident quality, combined with simple styling this creates the perfect balance. Ceppo was a firm favourite in the rebuilding of Milan in the 1950's. Available in three grey tones.


This range has 0% recycled content.

PORCELAIN	10mm Thick	Wall/Floor
	Matt	All Tiles
600x600	✓	Wall & Floor
600x1200	✓	Wall & Floor


COLOURS AVAILABLE

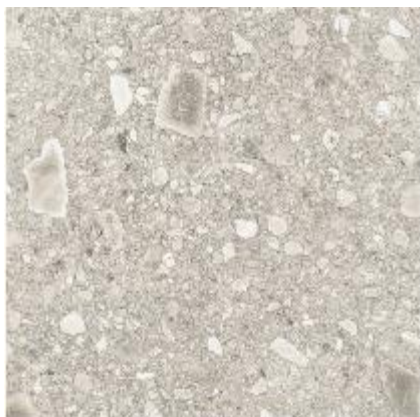

Cream

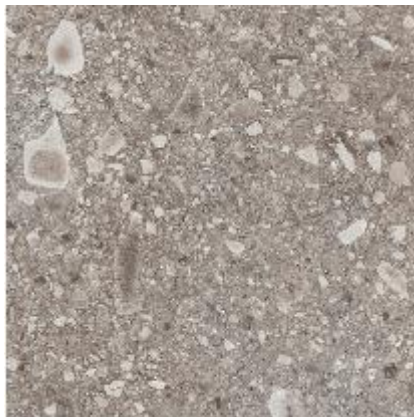

Mud

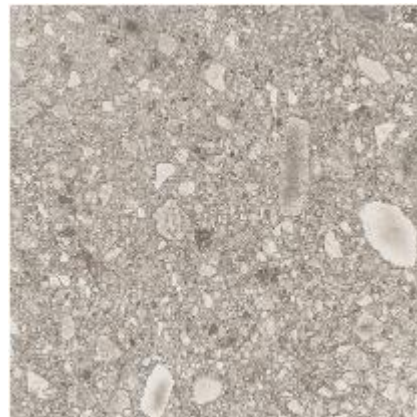

Grey

Group

Bla – Porcelain

	Standard	Requirement	Established Values
Length & Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	Eb ≤ 0.5 %	Ave ≤ 0.5 %
Breaking strength	ISO 10545-4	≥ 1300N	Ave ≥ 1300N
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm2	Ave 35 N/mm2
Resistance to surface abrasion	ISO 10545-7	Declare Class	PEI 4
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to Stain	ISO 10545-14	Declare Value	Class 3
Reaction to Fire	-	Class A1 A1/FL	A1 A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36 PTV	Pendulum Wet (4S Slider 96) +36 PTV
FULL RANGE	✓	✓

Recycled Content	%
Duggan	0%

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential