


# PARKSIDE

# WATERFORD

FAN SHAPED TILES

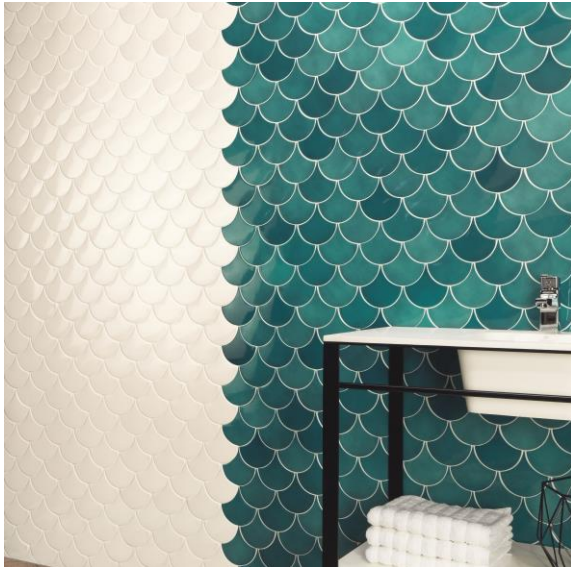

6

COLOURS

1

SIZES

1

FINISH

0

SPECIAL PIECES



0%

Available in a harmonious colour palette, the fan shaped Waterford is perfect for creating a statement feature in your project. Available in two versions, interior or exterior wall.

## COLOURS AVAILABLE



WHITE




GREY



LIGHT BLUE



INDIGO



EMERALD

|           |             |            |
|-----------|-------------|------------|
| PORCELAIN | 10 mm Thick | Wall/Floor |
|           | Gloss       | All Tiles  |
| 127x62    | ✓           | Wall       |
| CERAMIC   | 10 mm Thick | Wall/Floor |
|           | Gloss       | All Tiles  |
| 127x62    | ✓           | Wall       |

Group

BII – Ceramic

|   | Standard     | Requirement                       | Established Values |
|---|--------------|-----------------------------------|--------------------|
| Length & Width  | ISO 10545-2  | ±0.5% ~ ±2mm                      | Conforms           |
| Thickness   | ISO 10545-2  | ±10% ~ ±0.5mm                     | Conforms           |
| Straightness  | ISO 10545-2  | ±0.3% ~ ±1.5mm                    | Conforms           |
| Flatness  | ISO 10545-2  | ±0.5% ~ ±2.0mm                    | Conforms           |
| Rectangularity  | ISO 10545-2  | ±0.5% ~ ±2.0mm                    | Conforms           |
| Water absorption  | ISO 10545-3  | Eb >10 %                          | Ave >12.5%         |
| Breaking strength   | ISO 10545-4  | ≥ 600 N                           | Ave ≥ 600 N        |
| Modulus of rupture  | ISO 10545-4  | Ave Minimum 12 N/mm2              | Ave > 12 N/mm2     |
| Thermal shock resistance                                  | ISO 10545-1  | Pass according to EN ISO 110545-1 | Resistant          |
| Resistance to household chemicals and swimming pool salts | ISO 10545-13 | Min Class GB                      | GA                 |
| Resistance to high concentrations of alkalis and acids    | ISO 10545-13 | Declare Value                     | GHA                |
| Resistance to low concentrations of alkalis and acids     | ISO 10545-13 | Declare Value                     | GLA                |
| Resistance to Stain                                       | ISO 10545-14 | Min Class 3                       | NPD                |
| Reaction to Fire  | -            | Class A1 A1/FL                    | A1                 |

| Recycled Content | %  |
|------------------|----|
| Waterford        | 0% |

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

Group

Bla – Porcelain

|   | Standard     | Requirement                      | Established Values         |
|---|--------------|----------------------------------|----------------------------|
| Length & Width  | ISO 10545-2  | ±0.6% ~ ±2mm                     | Conforms                   |
| Thickness   | ISO 10545-2  | ±5% ~ ±0.5mm                     | Conforms                   |
| Straightness  | ISO 10545-2  | ±0.5% ~ ±1.5mm                   | Conforms                   |
| Flatness  | ISO 10545-2  | ±0.5% ~ ±2.0mm                   | Conforms                   |
| Rectangularity  | ISO 10545-2  | ±0.5% ~ ±2.0mm                   | Conforms                   |
| Water absorption  | ISO 10545-3  | Eb ≤ 0.5 %                       | Ave EB ≤ 0.2%              |
| Breaking strength   | ISO 10545-4  | ≥ 1300N                          | ≥ 1300N                    |
| Modulus of rupture  | ISO 10545-4  | Ave Minimum 35 N/mm <sup>2</sup> | Ave > 35 N/mm <sup>2</sup> |
| Resistance to surface abrasion                            | ISO 10545-7  | Declare Class                    | NPD – Wall Only            |
| Thermal shock resistance                                  | ISO 10545-9  | Pass according to EN ISO 10545-1 | Resistant                  |
| Frost Resistance  | ISO 10545-12 | Pass according to EN ISO 10545-1 | Resistant                  |
| Resistance to household chemicals and swimming pool salts | ISO 10545-13 | Min Class GB                     | GA                         |
| Resistance to high concentrations of alkalis and acids    | ISO 10545-13 | Declare Value                    | GHA                        |
| Resistance to low concentrations of alkalis and acids     | ISO 10545-13 | Declare Value                    | GLA                        |
| Resistance to Stain                                       | ISO 10545-14 | Declare Value                    | NPD                        |
| Reaction to Fire  | -            | Class A1 A1/FL                   | A1 A1/FL                   |

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential