

PARKSIDE

KASTE01

CONCRETE EFFECT RECTIFIED PORCELAIN



4

COLOURS

3

SIZES

1

FINISH

0

SPECIAL PIECES

Exclusive to Parkside in the UK, Kaste01 is available as a shower tray fashioned from the same material as the concrete effect tiles used on both the floor and walls as well as an outdoor tile and step option, enabling a cohesive flow between the floor and shower tray or indoors and outdoors.

These slip resistant tiles are suitable for use in wet areas and have a pendulum rating of 36+.

IN THIS RANGE




Concrete



Basalt



Grit



Cement


SIZE GUIDE

600x600mm*
700x700mm
900x900mm*

Shower tray
900x900mm



Step

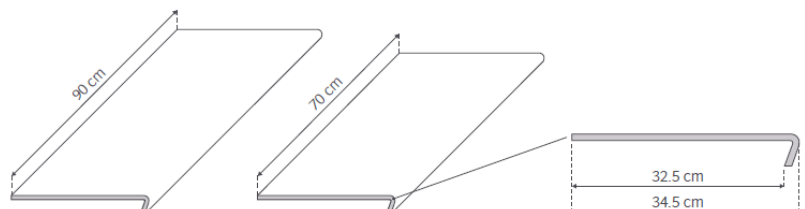

* Outdoor option available with 10mm tile and 30mm seraf foam backing

KASTE01



Dimensions	Multiple
Finish	Matt / Anti Slip
Body	Porcelain
Wall/Floor	Wall & Floor
Interior/ Exterior	Interior / Exterior
Group	BI _a
Pendulum Dry (4S)	36+
Pendulum Wet (4S)	36+
Pendulum Wet (TRL)	36+

Available Sizes
600x600x10mm
700x700x10mm
900x900x10mm

	Standard	Requirement	Typical Test Value
Length & Width	ISO 10545-2	$\pm 0.6\% \leq 2\text{mm}$	Pass
Thickness	ISO 10545-2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass
Straightness	ISO 10545-2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass
Flatness	ISO 10545-2	$\pm 0.5\% \leq \pm 2.0\text{mm}$	Pass
Rectangularity	ISO 10545-2	$\pm 0.5\% \leq \pm 2.0\text{mm}$	Pass
Water Absorption	ISO 10545-3	$E_b \leq 0.5\%$	Pass
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	Pass
Modulus of rupture	ISO 10545-4	35 N/mm ² Average min	Pass
Resistance to surface abrasion	ISO 10545-7	n/a	PEI 3
Frost Resistance	ISO 10545-12	Complies with Standard	Pass
Thermal Shock Resistance	ISO 10545-9	Complies with Standard	Pass
Resistance to Stain	ISO 10545-14	Min class 3	Pass
Resistance to chemicals	ISO 10545-14	Min Class B	Pass
Reaction to Fire	-	Floor/Wall class A1 FL/A1	Pass

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential