



1

COLOURS

1

SIZES

2

FINISHES

0

SPECIAL PIECES



40%

This luxurious porcelain tile collection incorporates black veins that run through elegantly.

A timeless range in matt and polished finishes adding a hint of sophistication to any design scheme.


This range contains 40% recycled content.

COLOURS AVAILABLE



White

SIZE GUIDE

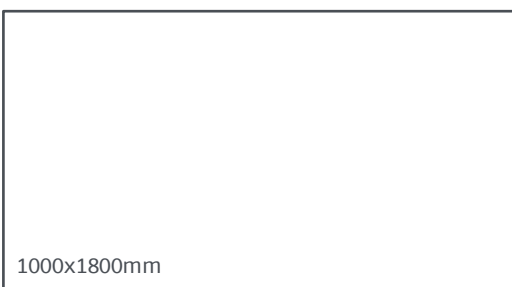

1000x1800mm



Dimensions	Multiple
Finish	Matt & Polished
Body	Porcelain
Wall/Floor	Wall & Floor
Group	Bi _a
Pendulum Dry (4S)	36+
Pendulum Wet (4S)	Tbc
Pendulum Wet (TRL)	tbc

Available Sizes
1000x1800x10mm

Recycled Content	%
Lunigi	40%

	Standard	Requirement	Typical Test Value
Length & Width	ISO 10545-2	$\pm 0.5\% \leq 2\text{mm}$	Pass
Thickness	ISO 10545-2	$\pm 10\% \leq \pm 0.5\text{mm}$	Pass
Straightness	ISO 10545-2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	Pass
Flatness	ISO 10545-2	$\pm 0.5\% \leq \pm 2.0\text{mm}$	Pass
Rectangularity	ISO 10545-2	$\pm 0.5\% \leq \pm 2.0\text{mm}$	Pass
Water Absorption	ISO 10545-3	$E_b \leq 0.5\%$	Pass
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	Pass
Modulus of rupture	ISO 10545-4	35 N/mm ² Average min	Pass
Resistance to surface abrasion	ISO 10545-7	n/a	NPD
Frost Resistance	ISO 10545-12	Complies with Standard	Pass
Thermal Shock Resistance	ISO 10545-9	Complies with Standard	Pass
Resistance to Stain	ISO 10545-14	Min class 3	Pass
Resistance to chemicals	ISO 10545-14	Min Class B	Pass
Reaction to Fire	-	Floor/Wall class A1 FL/A1	Pass

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential