

PARKSIDE

CASANO

MARBLE EFFECT COLLECTION



42%

1

COLOURS

2

SIZES

2

FINISHES

0

SPECIAL PIECES

Casano's luxurious gold and grey veins run right through the base white giving the touch of class and sophistication to any scheme.

This collection is available in polished and matt finishes in 755x1510 and 600x1200mm sizes enabling a high degree of versatility ensured by multiple combinations that stand out for their elegance.


This range contains 42% recycled content.

COLOURS AVAILABLE




White

SIZE GUIDE

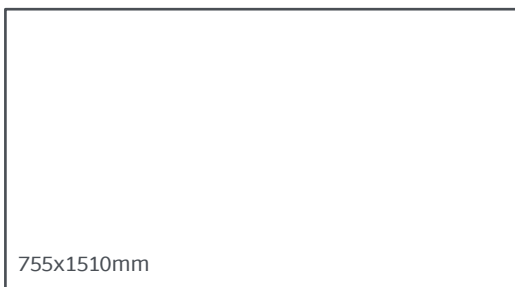

755x1510mm

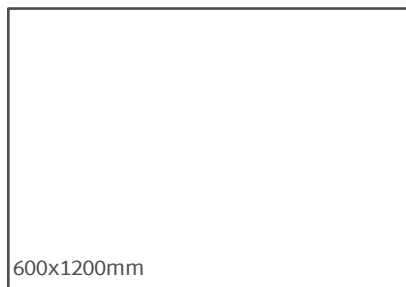

600x1200mm

PARKSIDE

PRODUCT DATA SHEET

CASANO



Dimensions	Multiple
Finish	Matt & Polished
Body	Porcelain
Wall/Floor	Wall & Floor
Group	Bi _a
Pendulum Dry (4S)	36+
Pendulum Wet (4S)	0-24
Pendulum Wet (TRL)	0-24

Available Sizes
755x1510mm 600x1200mm

Recycled Content	%
Casano	42%

	Standard	Requirement	Typical Test Value
Length & Width	ISO 10545-2	$\pm 0.5\% \leq 2\text{mm}$	Pass
Thickness	ISO 10545-2	$\pm 10\% \leq \pm 0.5\text{mm}$	Pass
Straightness	ISO 10545-2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	Pass
Flatness	ISO 10545-2	$\pm 0.5\% \leq \pm 2.0\text{mm}$	Pass
Rectangularity	ISO 10545-2	$\pm 0.5\% \leq \pm 2.0\text{mm}$	Pass
Water Absorption	ISO 10545-3	$E_b \leq 0.5\%$	Pass
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	Pass
Modulus of rupture	ISO 10545-4	35 N/mm ² Average min	Pass
Resistance to surface abrasion	ISO 10545-7	n/a	NPD
Frost Resistance	ISO 10545-12	Complies with Standard	Pass
Thermal Shock Resistance	ISO 10545-9	Complies with Standard	Pass
Resistance to Stain	ISO 10545-14	Min class 3	Pass
Resistance to chemicals	ISO 10545-14	Min Class B	Pass
Reaction to Fire	-	Floor/Wall class A1 FL/A1	Pass

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential