


# PARKSIDE

# WELFORD

BRICK TILES

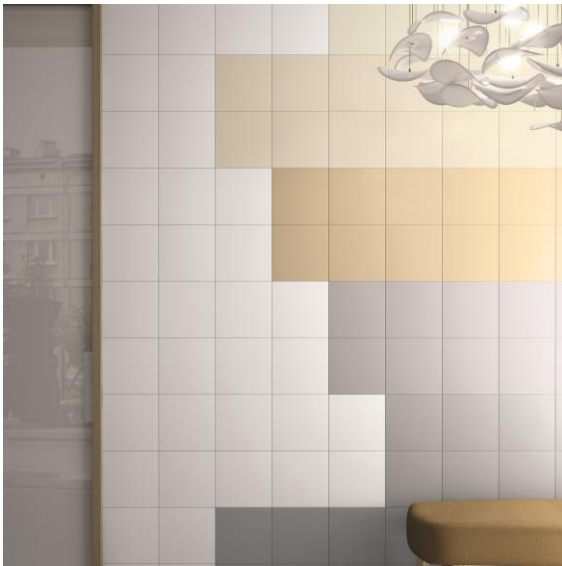

54

COLOURS

4

SIZES

1

FINISH

0

SPECIAL PIECES



Welford presents a spectrum of 54 colours, all available in a matt finish. The mix of colours allows a variety of feelings to be conveyed with dark, muted tones through to cool and light hues.

The Touch decor pieces are available in 200x200mm only. Size options for the other colours are:

200x200mm - all colours

100x200mm - Neve M100, Cinza M121, Cinza M122, Cinza M123, Cinza M124, Preto M200, Perola M190, Pastel M180, Bege M110, Laranja M500, Castanho M132, Amarelo M258, Vermelho M300, Rosa M167, Rosa M165, Bordeaux M172, Violeta M555, Azul M140, Azul M142, Azul M144, Verde M150 and Verde M152

150x150mm and 100x100mm - Neve M100, Cinza M121, Cinza M123, Preto M200, Perola M190, Bege M110, Amarelo M258, Azul M140 and Azul M142

## COLOURS AVAILABLE





PORCELAIN	6mm Thick	Wall/Floor
	Matt	All Tiles
100x100	✓	Wall
150x150	✓	Wall
200x200	✓	Wall
100x200	✓	Wall

The Touch decor pieces are available in 200x200mm only.

Group

Bla – Porcelain

	Standard	Requirement	Established Values
Length & Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	Eb ≤ 0.5 %	≤ 0.5 %
Breaking strength	ISO 10545-4	≥ 1300N	≥ 1300N
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	Ave Minimum 35 N/mm <sup>2</sup>
Resistance to surface abrasion	ISO 10545-7	Declare Class	n/a wall tile
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to Stain	ISO 10545-14	Declare Value	Class 3
Reaction to Fire	-	Class A1 A1/FL	A1 A1/FL

Recycled Content	%
Welford	0%

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential