




5 COLOURS
1 SIZE
1 FINISH
0 SPECIAL PIECES

Fauve is an enchanting collection featuring a range of 5 joyful colours: Yellow, Green, Pink, Light Blue and Dark Blue. The delicate crackle gloss finish adds an instant charm to the 100x300mm tiles.

Our Cotswolds Design Studio features the plush green on the meeting room walls, paired with the botanical Orta.

COLOURS IN THIS RANGE:

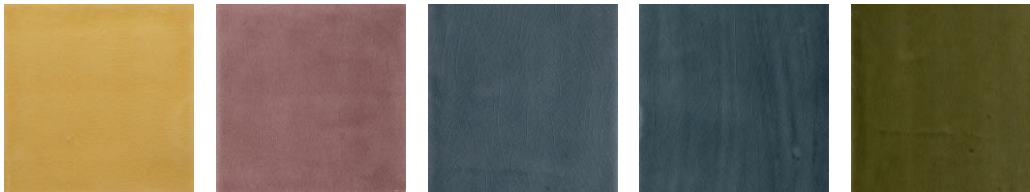

Yellow

Pink

Light Blue

Dark Blue

Green

	9mm Thick	Wall/Floor	Interior/ Exterior
Ceramic	Crackle gloss	All Tiles	All Tiles
100x300	✓	Wall	Interior

Group

BIII- Ceramic

	Standard	Requirement	Established Values
Length & Width	ISO 10545-2	±0.5% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±10% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.3% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	Eb >10 %	>10 %
Breaking strength	ISO 10545-4	≥ 600 N	≥ 600 N
Modulus of rupture	ISO 10545-4	Ave Minimum 12 N/mm2	Ave 12 N/mm2
Thermal shock resistance	ISO 10545-1	Pass according to EN ISO 110545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to Stain	ISO 10545-14	Min Class 3	Class 1
Reaction to Fire	-	Class A1 A1/FL	A1 A1/FL

* Please note : Crackle glazed tiles require sealing. Once sealed Class 3 can be achieved with the range.

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential