


PARKSIDE

AZLETT

EXTRUDED FULL BODY PORCELAIN

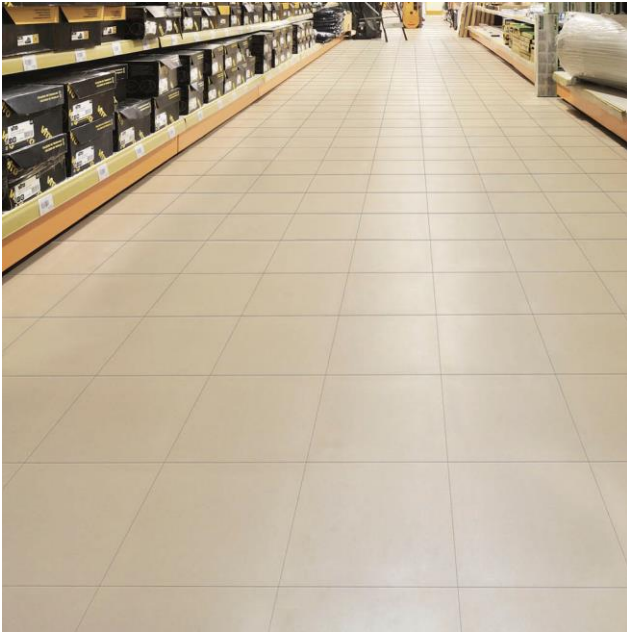

7

COLOURS

8

SIZES

3

FINISHES

0

SPECIAL PIECES



15%

Azlett is a comprehensive collection of extruded, unglazed, full body porcelain tiles. A high quality product with a homogenous surface and body ensuring longevity in even the most demanding of environments.


There are 3 finish options - Natural, Satin and CI.

This range has 15% recycled content.

*Perola and Claro only

PORCELAIN

	8mm			6mm		7mm		14mm		12mm			Wall/ Floor	Interior/ Exterior	
	Nat	CI	Sat	Nat	CI	Nat	CI	Nat	Nat	CI	Text CI	AS	Drain Text	All Tile	All Tile
295x592	✓	✓	✓											Wall & Floor	Interior & Exterior
592x592	✓	✓	✓											Wall & Floor	Interior & Exterior
392x392	✓	✓	✓											Wall & Floor	Interior & Exterior
295x295	✓	✓	✓					✓*	✓*	✓*	✓*	✓*	✓*	Wall & Floor	Interior & Exterior
300x300	✓	✓		✓	✓			✓*	✓*	✓*	✓*	✓*	✓*	Wall & Floor	Interior & Exterior
200x200						✓	✓	✓*	✓*	✓*	✓*	✓*	✓*	Wall & Floor	Interior & Exterior
194x194						✓	✓	✓*	✓*	✓*	✓*	✓*		Wall & Floor	Interior & Exterior
117x240									✓*	✓*				Wall & Floor	Interior & Exterior

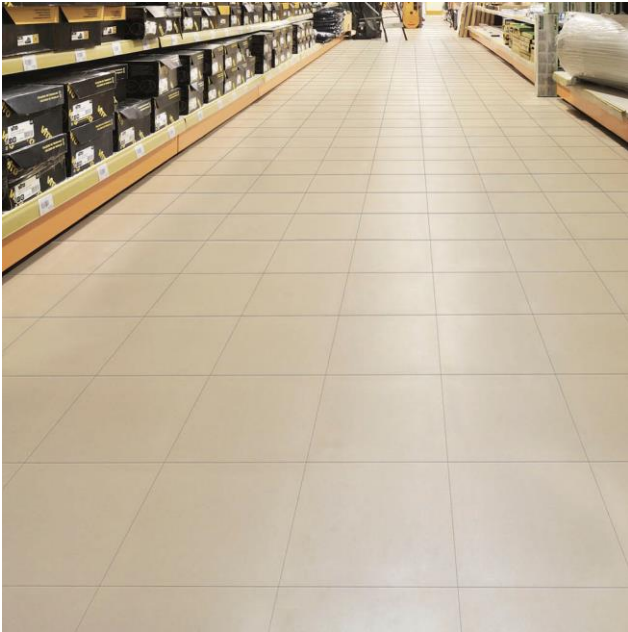

7

COLOURS

8

SIZES

3

FINISHES

0

SPECIAL PIECES

Azlett is a comprehensive collection of extruded, unglazed, full body porcelain tiles. A high quality product with a homogenous surface and body ensuring longevity in even the most demanding of environments.

There are 3 finish options - Natural, Satin and CI.

COLOURS AVAILABLE



PEROLA CI



BEGE CI



CLARO CI




ESCURO CI



ALUMINIO CI



PRETO CI



BLACK CI

Group

Ala – Porcelain

	Standard	Requirement	Established Values
Length & Width	ISO 10545-2	±1.0% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±10%	Conforms
Straightness	ISO 10545-2	±0.5%	Conforms
Flatness	ISO 10545-2	±0.5%	Conforms
Rectangularity	ISO 10545-2	±1.0%	Conforms
Water absorption	ISO 10545-3	Eb ≤ 0.5 %	≤ 0.5 %
Breaking strength	ISO 10545-4	≥ 7.5 mm thickness - ≥ 1300N < 7.5 mm thickness - <600N	≥ 7.5 mm thickness - ≥ 1300N < 7.5 mm thickness - <600N
Modulus of rupture	ISO 10545-4	Ave Minimum 28 N/mm2	Ave Minimum 28 N/mm2
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	Maximum 275mm2	Ave <150mm2
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	Class UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	Class UHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	Class ULA
Resistance to Stain	ISO 10545-14	Declare Value	Class 3
Reaction to Fire	-	Class A1 A1/FL	A1 A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36 PTV	Pendulum Wet (4S Slider 96) +36 PTV	Recycled Content	%
C1 & AS Finish Only	✓	✓	Azlett	15%

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential