



6

COLOURS

6

SIZES

1

FINISH

0

SPECIAL PIECES




11.5% / 14.5%

Fifield is a classic limestone effect collection available in 6 colours to add elegance and a timeless style to your project.


White, Pearl, Ash and Taupe have 11.5% recycled content and Almond and Coal have 14.5% recycled content.

COLOURS AVAILABLE

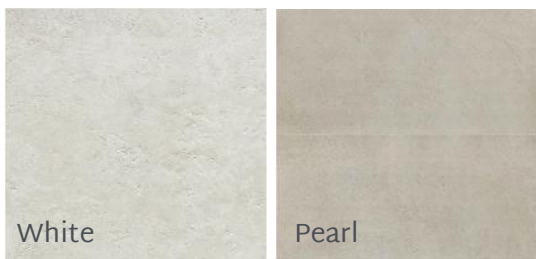


White

Pearl

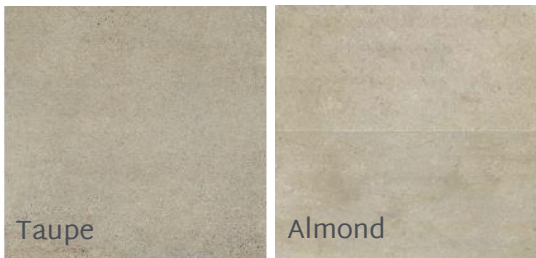

Taupe

Almond

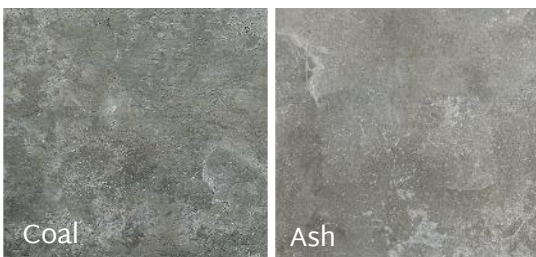

Coal

Ash

PORCELAIN	10mm Thick	Wall/Floor
	Matt	All Tiles
300x600	✓	Wall & Floor
400x800	✓	Wall & Floor
600x600	✓	Wall & Floor
600x1200	✓	Wall & Floor
800x800	✓	Wall & Floor
800x1800	✓	Wall & Floor

Group

Bla – Porcelain

	Standard	Requirement	Established Values
Length & Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	Eb ≤ 0.5 %	Ave 0.08 %
Breaking strength	ISO 10545-4	≥ 1300N	Ave 3200N
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm2	Ave 35 min N/mm2
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	≤175mm2	Ave 140mm2
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	UHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULA
Resistance to Stain	ISO 10545-14	Declare Value	Class 4
Reaction to Fire	-	Class A1 A1/FL	A1 A1/FL

Recycled Content	%
White, Pearl, Ash and Taupe	11.5%
Almond and Coal	14.5%

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential