


PARKSIDE

HALFORD

GLAZED CERAMIC RANGE

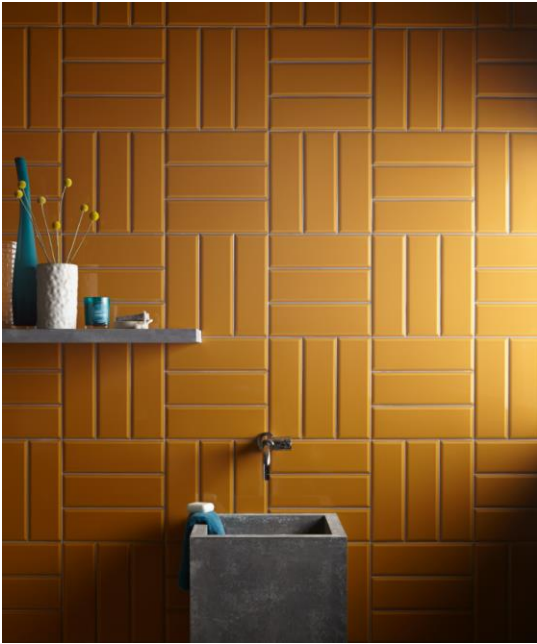

11

COLOURS

1

SIZE

1

FINISH

0

SPECIAL PIECES

Halford is a glossy glazed ceramic wall tile collection. With 11 versatile, desirable colours any design scheme can be accommodated.

COLOURS AVAILABLE




Green



Purple



Sky




Bone




Grey




Yellow




Plum



White




Cream



Blue

SIZE GUIDE

297x97mm



Teal



Dimensions	297x97x9mm
Finish	Gloss
Body	Ceramic
Wall/Floor	Wall
Interior/Exterior	Interior
Group	BII _b
Pendulum Dry	-
Pendulum Wet	-

Available Sizes
297x97x9mm

	Standard	Requirement	Typical Test Value
Length & Width	ISO 10545-2	$\pm 0.6\% \leq 2\text{mm}$	Pass
Thickness	ISO 10545-2	$\pm 5\%$ $\leq \pm 0.5\text{mm}$	Pass
Straightness	ISO 10545-2	$\pm 0.5\%$ $\leq \pm 1.5\text{mm}$	Pass
Flatness	ISO 10545-2	$\pm 0.5\%$ $\leq \pm 2.0\text{mm}$	Pass
Rectangularity	ISO 10545-2	$\pm 0.5\%$ $\leq \pm 2.0\text{mm}$	Pass
Water Absorption	ISO 10545-3	$6\% < E_b \leq 10\%$	Pass
Breaking strength	ISO 10545-4	$\geq 800\text{N}$	Pass
Modulus of rupture	ISO 10545-4	18 N/mm ² Average min	Pass
Resistance to surface abrasion	ISO 10545-7	n/a	n/a
Frost Resistance	ISO 10545-12	Complies with Standard	Not resistant
Thermal Shock Resistance	ISO 10545-9	Complies with Standard	Pass
Resistance to Stain	ISO 10545-14	Min class 3	Pass
Resistance to chemicals	ISO 10545-14	Min Class B	Pass
Reaction to Fire	-	Floor/Wall class A1 FL/A1	Pass

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential