

# PARKSIDE

## HESTER

STONE EFFECT



6

COLOURS

5

SIZE

1

FINISH

0

SPECIAL PIECES

Hester is a beautiful collection of stone effect tiles, replicating natural volcanic stone with a Raku look glaze in six subtle shades.

Standard sizes available are 600x600mm, 600x300mm, 600x100mm and 75x300mm.

There's also a three-dimensional décor called Kaptur available in 600x300mm and Link, a hexagonal pattern available in 196x342mm.

This range has 12% recycled content.






PORCELAIN	10m Thick	Wall/Floor	Interior/Exterior
	Matt	All Colours	All Colours
75 x 300	✓	Wall & Floor	Interior & Exterior
100 x 600	✓	Wall & Floor	Interior & Exterior
300 x 600	✓	Wall & Floor	Interior & Exterior
600 x 600	✓	Wall & Floor	Interior & Exterior
196 x 342 Hex	✓	Wall	Interior & Exterior

# PARKSIDE

COLOURS AVAILABLE

# HESTER

STONE EFFECT

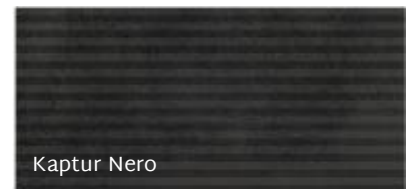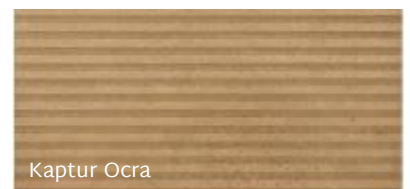

Group

Bla – Porcelain

	Standard	Requirement	Established Values
Length & Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	Eb ≤ 0.5 %	≤ 0.5 %
Breaking strength	ISO 10545-4	≥ 1300N	Ave ≥ 2000N
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm2	Ave 50 N/mm2
Resistance to surface abrasion	ISO 10545-7	Declare Class	Bianco – PEI 5 Ocra – PEI 4 Ruggine, Verde, Blu & Nero – PEI 3
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to Stain	ISO 10545-14	Declare Value	Class 5
Reaction to Fire	-	Class A1 A1/FL	A1 A1/FL

Recycled Content

%

Hester

12%

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential