

# Dandy

10 COLOURS / 1 SIZE / 1 FINISH / 1 SPECIAL PIECE


Recreating one of the icons of classic style, Dandy presents a bold approach for spaces with personality. Ideal for the creation of creative and sophisticated combinations, allowing for combinations of the micro cement base tiles, with the coloured flakes of the Terrazzo graphic. Available in 5 distinct colours, Dandy offers a balanced composition of design and colour, resulting in differentiated and sophisticated.




Dandy




# Dandy

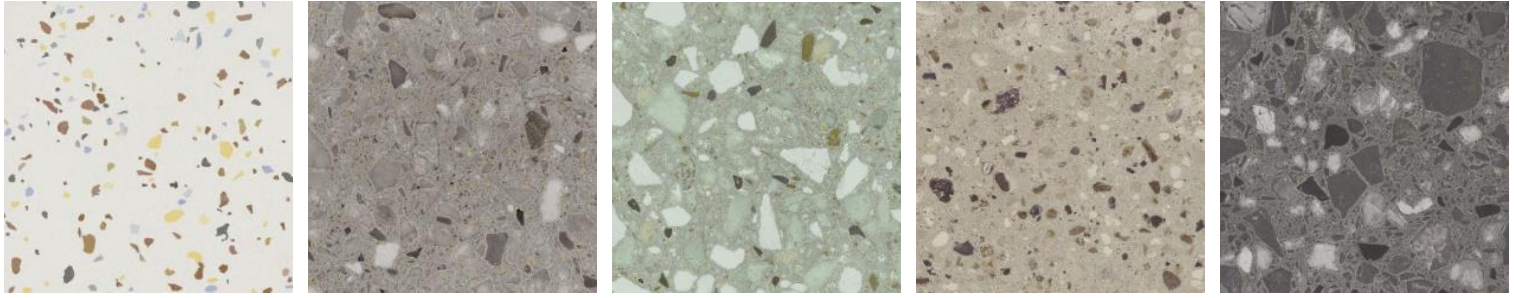

Ceramic	8.5mm thick	Wall/floor	Interior/exterior
	Matt	All tiles	All tiles
200x200	✓	Wall & Floor	Interior Only
200x200 Mosaic	✓	Wall & Floor	Interior Only



200x200x8.5



200x200x8.5

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Dandy

## GROUP / B1b - CERAMIC

	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.5% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5%~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	0.5% < E <sub>b</sub> < 3%	Conforms
Breaking strength	ISO 10545-4	≥ 1100N	≥ 1500N
Modulus of rupture	ISO 10545-4	Ave Minimum 30 N/mm <sup>2</sup>	≥ 35 N/mm <sup>2</sup>
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to stain	ISO 10545-14	Min Class 3	Class 4/5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Slip resistance characteristics	Pendulum Dry (4S Slider 96) +36 PTV	Pendulum Wet (4S Slider 96) +36 PTV
Full range	✓	✓

Recycled content	%
Dandy	0

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles