

23 COLOURS / 3 SIZES / 2 FINISHES / 0 SPECIAL PIECES

Inspiring creativity, the Matrix collection offers an unprecedented portfolio of 23 tile colours with the introduction of Pebble Beige, Quartz Pink, Olive Green & Ocean Teal, all available in matt or gloss finishes, accompanied by matching grouts and trims. We wanted to create a range of colours that would allow the design community to curate co-ordinated looks or mix and match colours to create striking design statements.

The Matrix colours were developed in collaboration with colour consultant Vanessa Konig, who wanted to ensure that they would complement natural materials as well as work across a range of environments; from warm, cosy restaurants and bars to more pared-back, minimalist designs.

Stocked in 148x148mm and 98x198mm, every Matrix colour is accompanied by matching straight edge trims, as well as grout, allowing the creation of a beautifully coordinated end result in solid colour, or to experiment with striking designs combining contrasting tiles, grouts and trims. 200x200mm can also be ordered direct from the factory with a 3 pallet MOQ.












The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: $\underline{www.parkside.co.uk} - E: \underline{info@parkside.co.uk}$

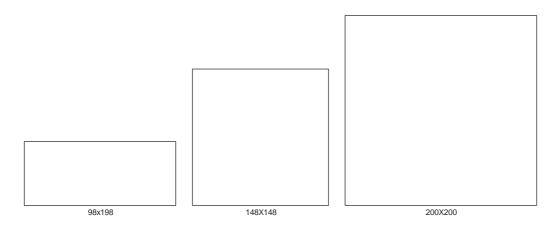

Porcelain -	7mm thick		Wall/floor	Interior/exterior
	Matt	Gloss	All tiles	All tiles
98x198	•	✓	Wall Only	Interior Only
148x148	→	✓	Wall Only	Interior Only
200x200	~	✓	Wall Only	Interior Only

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

GROUP / BIII - CERAMIC

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.5% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±10% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.3% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	Eb >10%	>10%
Breaking Strength	ISO 10545-4	≥ 600N	≥ 600N
Modulus of Rupture	ISO 10545-4	Ave Minimum 12 N/mm ²	>16N/mm²
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	UHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULA
Resistance to Stain	ISO 10545-14	Min Class 3	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.