

Base

13 COLOURS / 7 SIZES / 3 FINISHES / 0 SPECIAL PIECES

Ideal for tone-on-tone or contrasting combinations, Base resin-effect surfaces expand the limits of design thanks to the wide range of colours. The graphics adapt perfectly to any format to reproduce the harmonious and elegant trowelled effect with extreme fidelity. Base has 13 soft tones, ideal for spaces with a strong and elegant character that evokes Italian culture in a contemporary manner. The huge variety of sizes, colours and mosaics make this a great range for a full coverage project.



Base



Base



SUEDE SILK



CORD SILK



CLOUD SILK



FOG SILK



COTTON SILK



GRAPHITE SILK



SUEDE MATT



CORD MATT




CLOUD MATT



FOG MATT



COTTON MATT



GRAPHITE MATT



BLOOM WALL



CARMEL WALL



GRAPE WALL



DUSK WALL



MIDNIGHT WALL



MOSS WALL



EMERALD WALL



CLOUD WALL



CORD WALL



COTTON WALL



GRAPHITE WALL



SUEDE WALL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.


For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Base




COTTON BEAD




SUEDE BEAD




CORD BEAD




CLOUD BEAD




GRAPHITE BEAD




BLOOM BEAD




CARAMEL BEAD




GRAPE BEAD




DUSK BEAD




MIDNIGHT BEAD




MOSS BEAD




EMERALD BEAD




COTTON WIGGLE



BLOOM WIGGLE



DUSK WIGGLE




MOSS WIGGLE

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.


For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles


Base




COTTON MOSAIC Q




CORD MOSAIC Q




SUEDE MOSAIC Q




CLOUD MOSAIC Q




GRAPHITE MOSAIC Q




BLOOM MOSAIC Q




CARMEL MOSAIC Q




GRAPE MOSAIC Q




DUSK MOSAIC Q



MIDNIGHT MOSAIC Q




MOSS MOSAIC Q



EMERALD MOSAIC Q



COTTON MOSAIC MATT



CORD MOSAIC MATT



SUEDE MOSAIC MATT



CLOUD MOSAIC MATT



GRAPHITE MOSAIC MATT



BLOOM MOSAIC MATT

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.


For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles


Base




COTTON MAZE



CORD MAZE




SUEDE MAZE




CLOUD MAZE




FOG MAZE




GRAPHITE MAZE




COTTON MAZE SILK



CORD MAZE SILK




SUEDE MAZE SILK



CLOUD MAZE SILK



FOG MAZE SILK



GRAPHITE MAZE SILK

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Base

Porcelain tiles			Suede	Cord	Cotton	Cloud	Fog	Graphite	Bloom	Caramel	Grape	Dusk	Midnight	Moss	Emerald
1200x2780	6mm	Matte rectified	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
1200x1200	20mm	Textured rectified	✓			✓	✓								
1200x1200	9mm	Grip rectified				✓	✓								
1200x1200	9mm	Matte rectified, Silk rectified	✓	✓	✓	✓	✓	✓							
800x800	20mm	Textured rectified	✓			✓	✓								
600x1200	9mm	Matte rectified	✓	✓	✓	✓	✓	✓							
600x600	9mm	Matte rectified, Silk rectified	✓	✓	✓	✓	✓	✓							
300x600	9mm	Matte rectified, Silk rectified	✓	✓	✓	✓	✓	✓							

Wall tiles			Suede	Cord	Cotton	Cloud	Fog	Graphite	Bloom	Caramel	Grape	Dusk	Midnight	Moss	Emerald
500x1200	8.5mm	Matte rectified	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓


Wall tiles			Suede	Cord	Cotton	Cloud	Fog
1200x1200	20mm	Textured rectified	✓	✓	✓	✓	✓
1200x1200	9mm	Grip rectified	✓	✓	✓	✓	✓
800x800	20mm	Textured rectified	✓	✓	✓	✓	✓

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Base

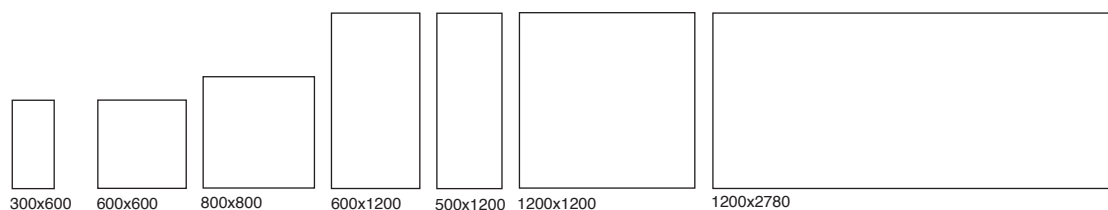

GROUP / Bill - CERAMIC

	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 10\%$	Ave 10%
Breaking strength	ISO 10545-4	$\geq 600\text{N}$	Ave $\geq 1300\text{N}$
Modulus of rupture	ISO 10545-4	Ave min 12 N/mm ²	Ave $\geq 15\text{ N/mm}^2$
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	-
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	-
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to stain	ISO 10545-14	Declare Value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Slip resistance characteristics	Pendulum Dry (4S Slider 96) +36 PTV	Pendulum Wet (4S Slider) +36 PTV
	✓	✓

Recycled content	%
Wall only	20-29
Wall and floor	30-39

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Base

GROUP / Bla - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave 0.1%
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	Ave $\geq 1300\text{N}$
Modulus of rupture	ISO 10545-4	Ave min 35 N/mm^2	Ave $\geq 15 \text{ N/mm}^2$
Resistance to deep abrasion	ISO 10545-6	$< 175\text{mm}^3$	Ave $\leq 150\text{mm}^3$
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	UHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULA
Resistance to stain	ISO 10545-14	Declare Value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Slip resistance characteristics	Pendulum Dry (4S Slider 96) +36 PTV	Pendulum Wet (4S Slider) +36 PTV
Grip finish only	✓	✓

Recycled content	%
Wall only	20-29
Wall and floor	30-39

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles