


# Elmden

**44 COLOURS / 4 SIZES / 2 FINISHES / 0 SPECIAL PIECES**

An extension to our popular Matrix collection, Elmden gives you complete freedom to create a unique design with the 44 colour options covering a variety of moods from tranquil and comforting to vibrant and energetic. This range has 0% recycled content.

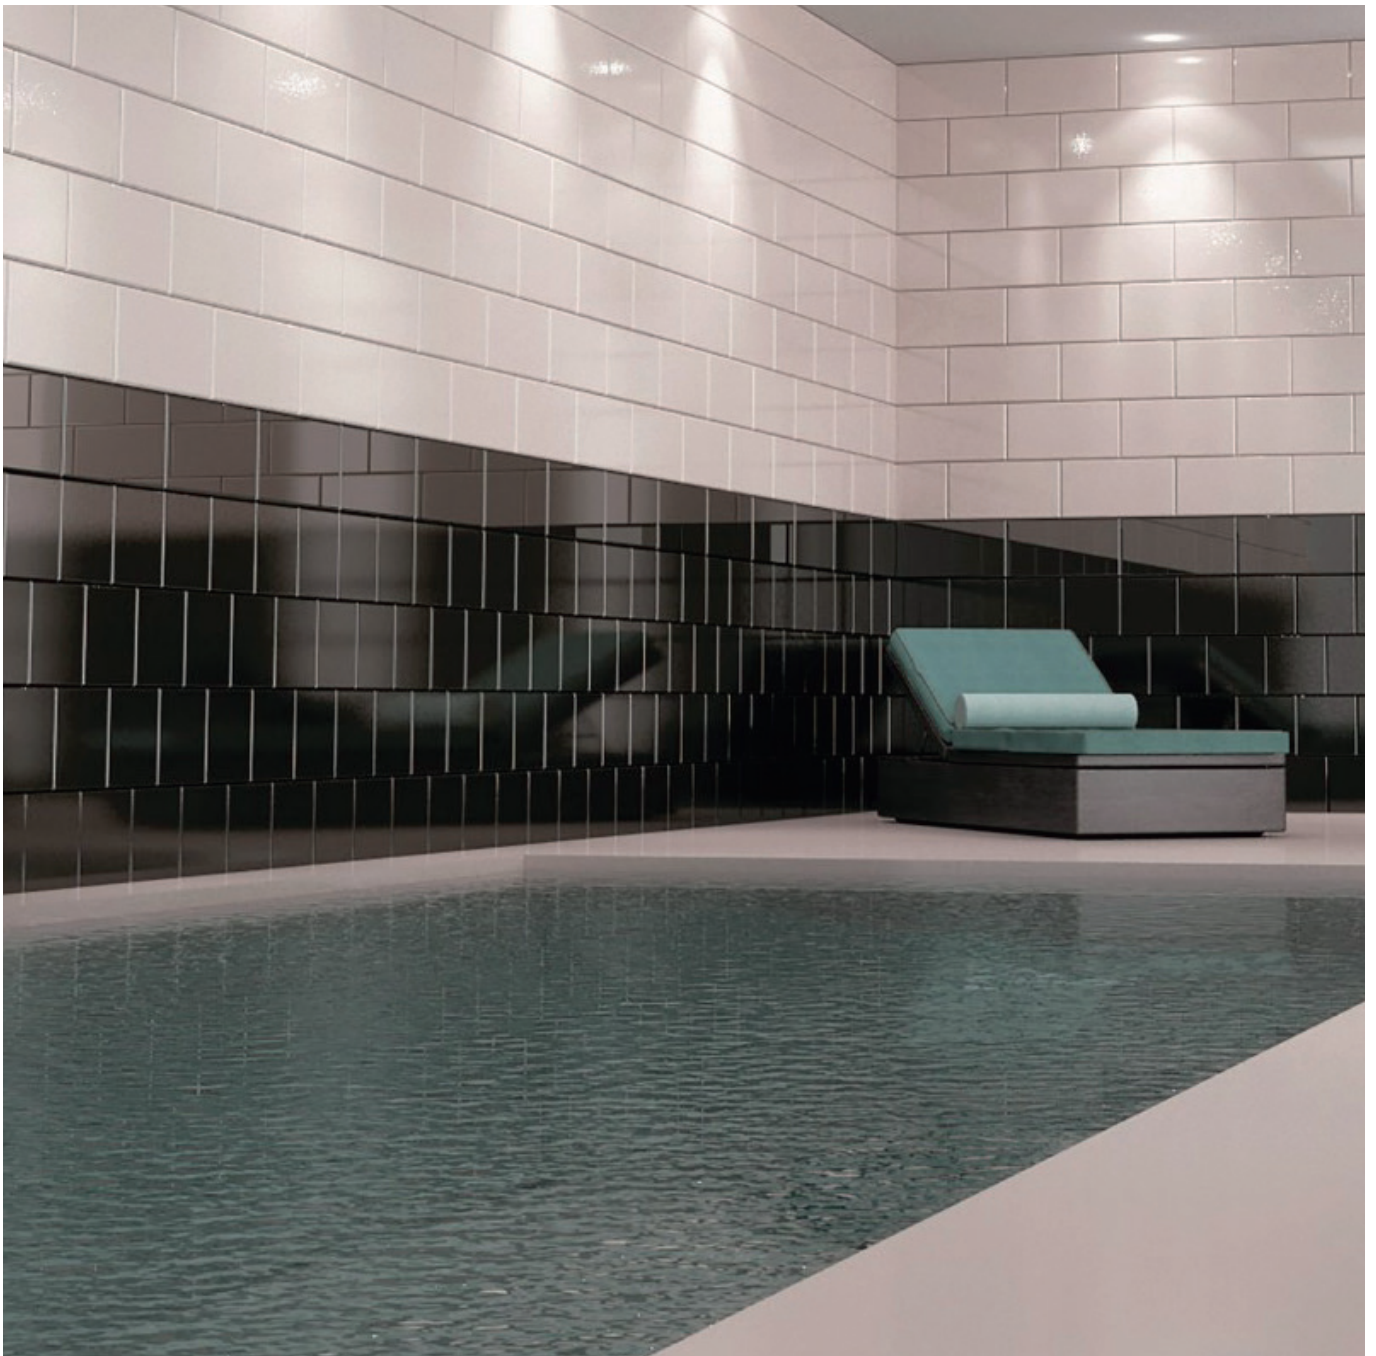

# Elmden




# Elmden



LILAS 470 GLOSS



BERINGELA 460 GLOSS



CHOCOLATE 450 GLOSS



PURPURA 430 GLOSS



CEREJA 420 GLOSS



SALMOA 400 GLOSS



ROSA 390 GLOSS



ROSA 380 GLOSS



ROSA 370 GLOSS



LAVANDA 360 GLOSS




AZUL 350 GLOSS




COBALTO 340 GLOSS



AZUL 330 GLOSS



AZUL 320 GLOSS



AZUL 310 GLOSS




AZUL 300 GLOSS




PISTACHIO 290 GLOSS



VERDE 280 GLOSS



VERDE 270 GLOSS



VERDE 260 GLOSS



AZEITONA 250 GLOSS



ANIS 240 GLOSS



AMARELO 220 GLOSS



AMARELO 210 GLOSS

# Elmden




FOGO 200 GLOSS




LARANJA 190 GLOSS



VERMELHO 180 GLOSS



PRETO 150 GLOSS



CINZENTO 140 GLOSS




CINZENTO 120 GLOSS



ANTHRACITE 110 GLOSS



CINZENTO 100 GLOSS



CINZENTO 090 GLOSS



AZUL 1330 GLOSS




VERDE FOLHA 3500 GLOSS




VERDE AZUL 1800 GLOSS




VERDE 800 GLOSS




CINZENTO AZUL 1310 GLOSS




CINZENTO 1120 GLOSS




CINZENTO 1140 GLOSS




BEGE 1050 GLOSS



VERMELHO 170 GLOSS



WHITE 000 GLOSS




WHITE 001 MATT

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Elmden



Ceramic	7mm thick		8mm thick		6.5mm thick		Wall/floor	Interior/ exterior
	Matt	Gloss	Matt	Gloss	Matt	Gloss	All tiles	All tiles
298x98	✓	✓					Wall	Interior
298x148	✓	✓					Wall	Interior
200x200					✓	✓	Wall	Interior
75x150			✓	✓			Wall	Interior

## GROUP / BIII CERAMIC

Range	Standard	Requirement	Typical test value
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave 14%
Breaking strength	ISO 10545-4	≥ 600N	≥ 600N
Modulus of rupture	ISO 10545-4	12 N/mm <sup>2</sup> Average min	12 N/mm <sup>2</sup> Average min
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare value	NPD
Resistance to stain	ISO 10545-14	Min Class 3	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled content	%
Elmden	0

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles