


# Halford

9 COLOURS / 1 SIZES / 1 FINISHES / 0 SPECIAL PIECES

Halford is a glossy glazed ceramic wall tile collection. With 11 versatile, desirable colours any design scheme can be accommodated. This range has 10% recycled content.



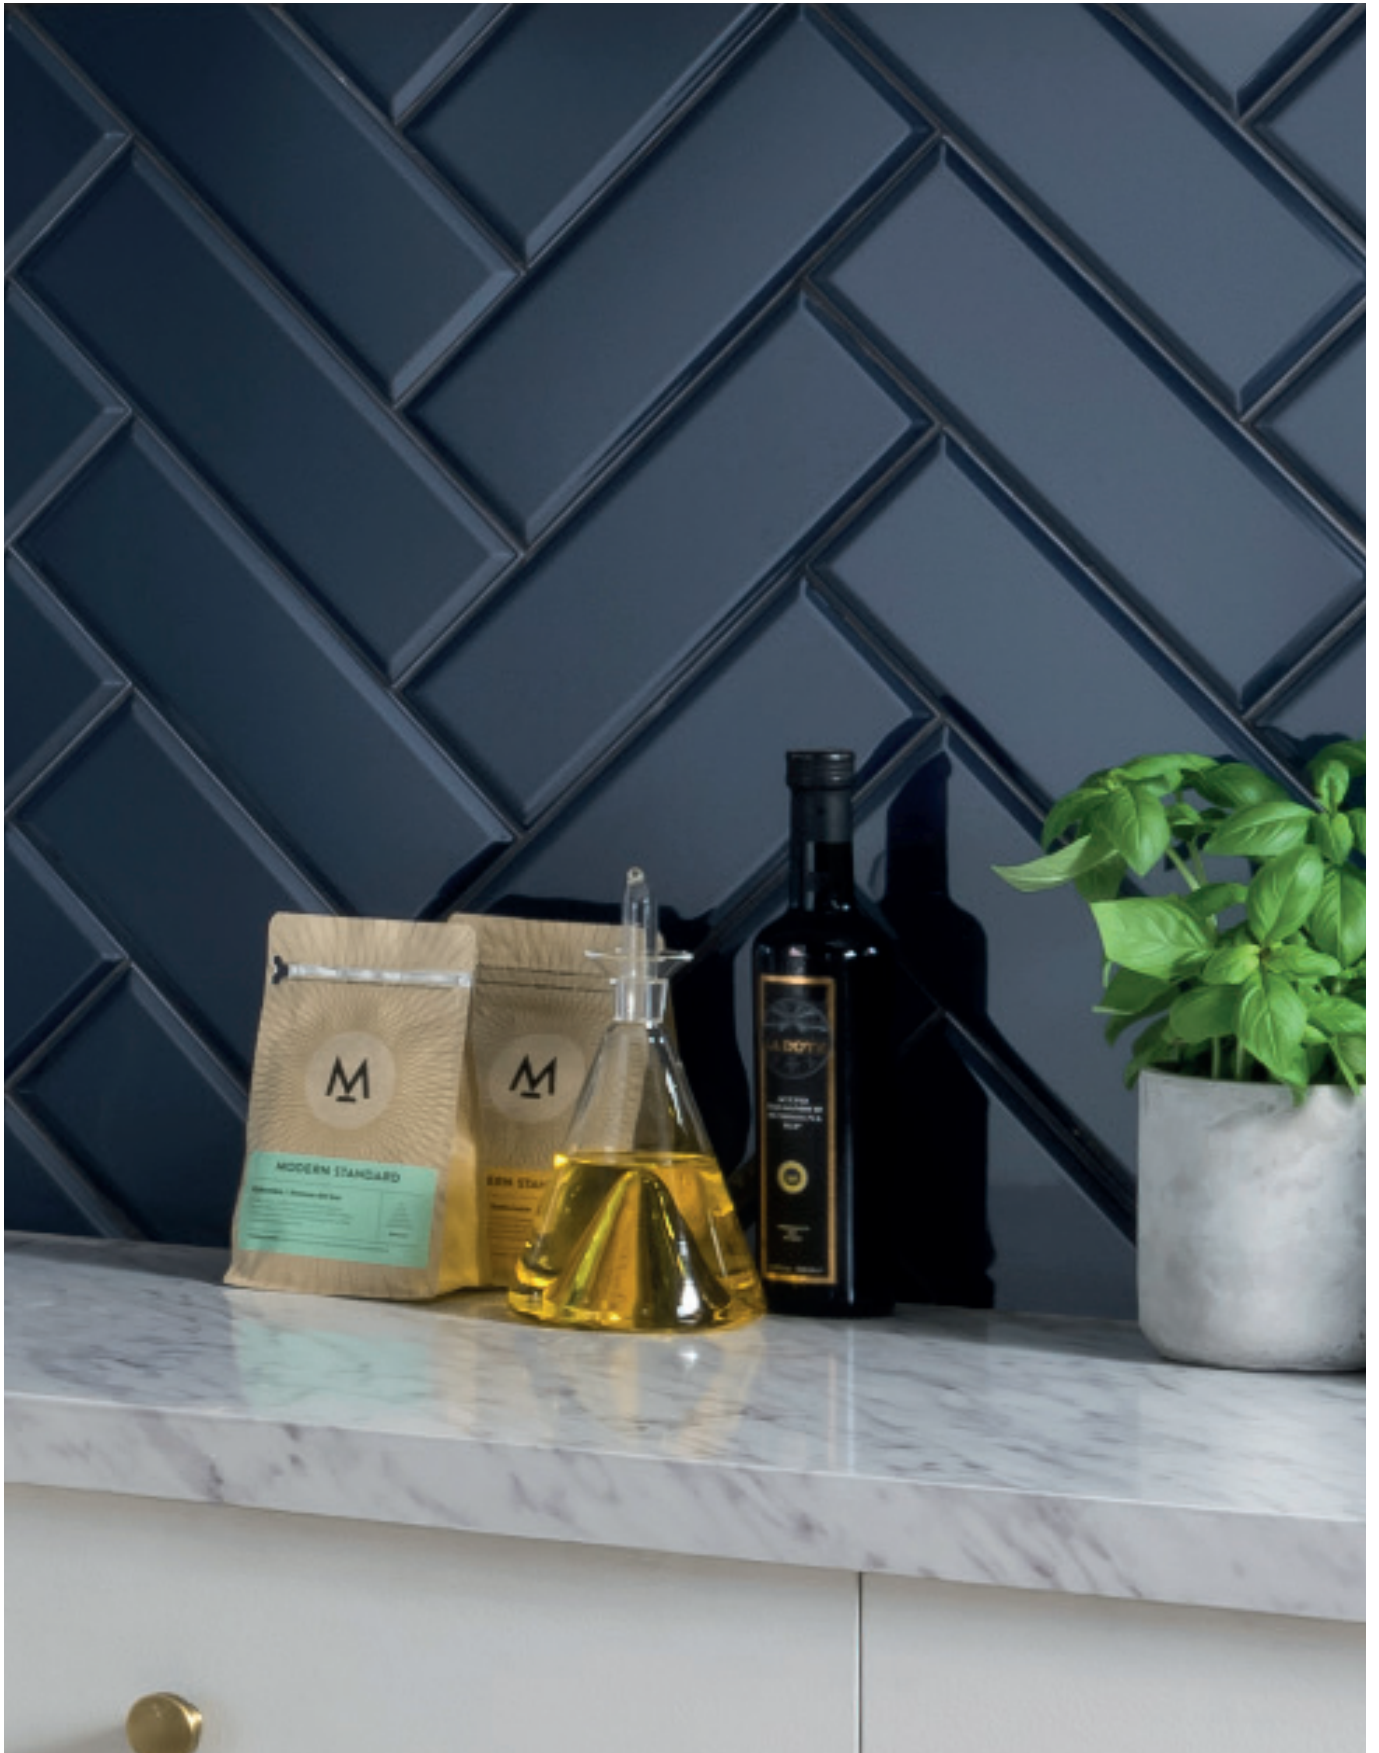

Halford





Halford



MINT



LAVENDER



SKY




MIST



OCRE




DAMSON

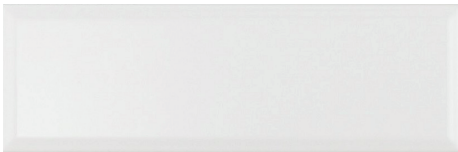

WHITE



TEAL

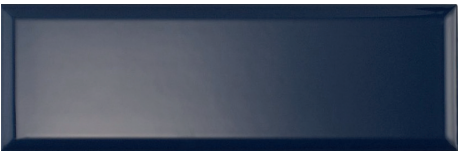

BLUE

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Halford



297x97

Dimensions	297x97x9mm
Finish	Gloss
Body	Ceramic
Wall/floor	Wall
Group	BI <sub>b</sub>
Pendulum Dry	–
Pendulum Wet	–
Recycled content	10%

	Standard	Requirement	Typical test value
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Pass
Thickness	ISO 10545-2	±5% ≤ ±0.5mm	Pass
Straightness	ISO 10545-2	±0.5% ≤ ±1.5mm	Pass
Flatness	ISO 10545-2	±0.5% ≤ ±2.0mm	Pass
Rectangularity	ISO 10545-2	±0.5% ≤ ±2.0mm	Pass
Water absorption	ISO 10545-3	6% < E <sub>b</sub> ≤ 10%	Pass
Breaking strength	ISO 10545-4	≥ 800N	Pass
Modulus of rupture	ISO 10545-4	Ave Minimum 18 N/mm <sup>2</sup>	Pass
Resistance to surface abrasion	ISO 10545-7	n/a	n/a
Frost resistance	ISO 10545-12	Complies with Standard	Not resistant
Thermal shock resistance	ISO 10545-9	Complies with Standard	Pass
Resistance to stain	ISO 10545-14	Min Class 3	Pass
Resistance to chemicals	ISO 10545-14	Min Class B	Pass
Reaction to fire	-	Floor/wall Class A1 A1/FL	Pass

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles