

# Sediment

4 COLOURS / 9 SIZES / 4 FINISHES / 0 SPECIAL PIECES

Sediment features the authentic appeal of the most famous and sought-after limestones, very diverse in its composition and origin - French Hauteville, Portuguese Moleanos, German Jura, Italian stone from Vicenza and Slovenian Lipika. The graphic contrast creates a texture rich in accurate, realistic details. On the surfaces you can see fossils and shells, areas with parallel layers that testify to the progressive deposition of sediment over the centuries, others characterised by rocky aggregates or drawn only by the fine grain of the stone.





Sediment





## Sediment



Sediment



GREY BUSH



BEIGE BUSH



DESERT BUSH



IVORY BUSH



GREY LINE



BEIGE LINE




DESERT LINE




IVORY LINE




GREY



BEIGE




DESERT



IVORY




GREY TUMBLED



BEIGE TUMBLED



DESERT TUMBLED




IVORY TUMBLED



Sediment



BEIGE CERAM  
(WALL ONLY)



BEIGE CERAM  
(WALL ONLY)



BEIGE 3D WALLPAPER  
(WALL ONLY)



BEIGE CERAM  
(WALL ONLY)



BEIGE 3D WAY  
(WALL ONLY)



IVORY 3D WAY  
(WALL ONLY)

Porcelain	6mm thick	9mm thick				20mm	Wall/floor tiles	Interior/exterior
	Matt	Matt	Bush hammer	Line	Grip	Grip	All tiles	All tiles
1198x2778	✓						Wall and floor	Interior and exterior
1198x1198		✓					Wall and floor	Interior and exterior
748x1498		✓					Wall and floor	Interior and exterior
748x748		✓					Wall and floor	Interior and exterior
373x748		✓	✓	✓	✓		Wall and floor	Interior and exterior
598x1198						✓	Wall and floor	Interior and exterior
598x598						✓	Wall and floor	Interior and exterior


Ceramic	8.5mm thick	Wall/floor	Interior/exterior
	Matt	All tiles	All tiles
400x800	✓	Wall	Interior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Sediment

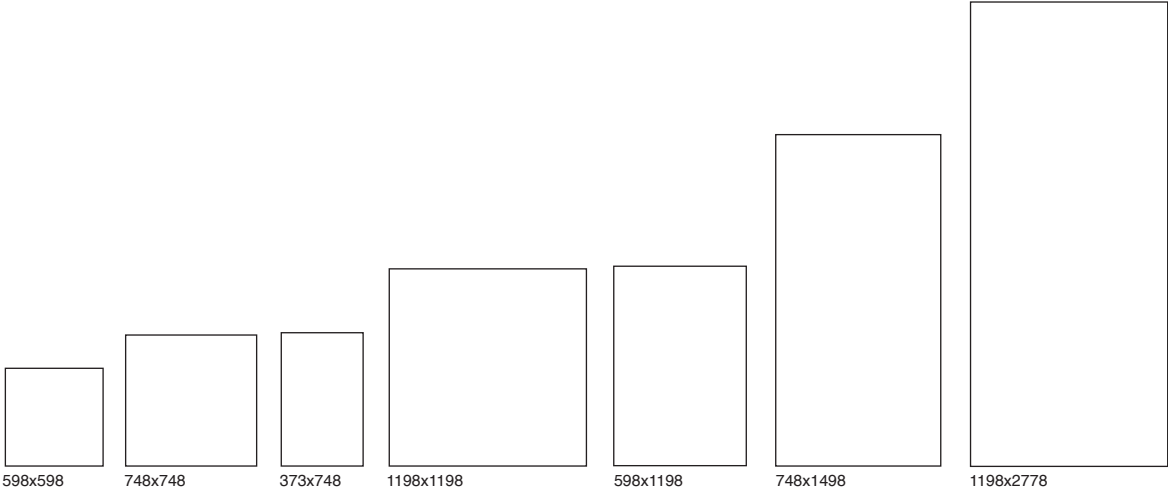

## GROUP / Bla PORCELAIN

Range	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	$\leq 0.5\%$
Breaking strength	ISO 10545-4	$\geq 1300N$	Ave $\geq 1500N$
Modulus of rupture	ISO 10545-4	35 N/mm <sup>2</sup> Average min	40 N/mm <sup>2</sup> Average min
Resistance to deep abrasion (unglazed tiles)	ISO 10545-7	$< 175mm^2$	$< 150mm^3$
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare value	UHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare value	NPD
Resistance to stain	ISO 10545-14	Declare value	ULA
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles