

# Regents

1 COLOURS / 5 SIZES / 3 FINISHES / 0 SPECIAL PIECES

This range enables you to create a clean, fresh look with its variation of ceramic white tiles. With bumpy, matt, gloss and décor options available, it's easy to create a bright space.




## Regents



Regents




BUMPY

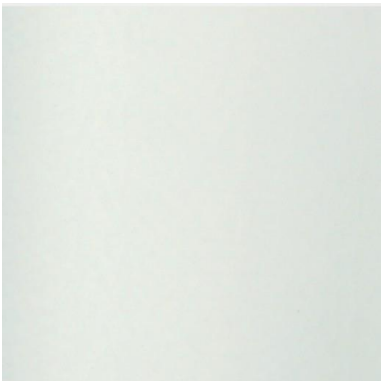


GLOSS



MATT

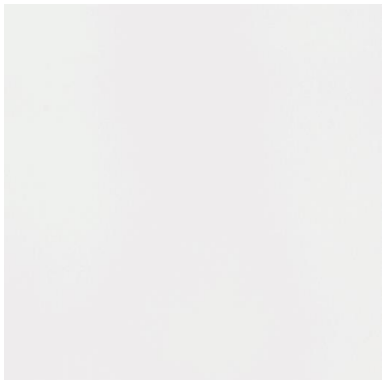


SATIN

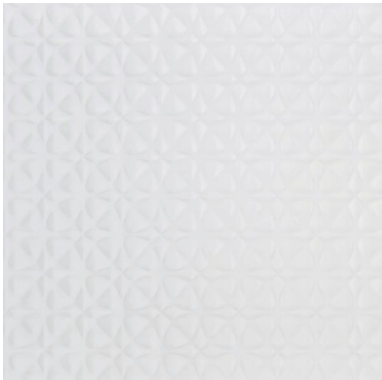

GLOSS GEOMETRIC DECOR



GLOSS WAVE DECOR

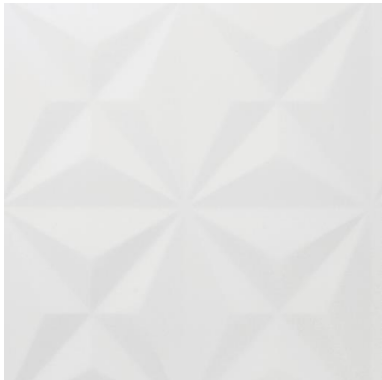

SATIN STAR DECOR



GLOSS SURF DECOR



SATIN ZIGZAG DECOR

Ceramic	6.5mm thick		7mm thick		8mm thick		9.3mm thick		9.5mm thick	10.5mm thick	12mm thick	Wall/floor	Interior/exterior
	Gloss	Gloss	Matt	Bumpy	Gloss	Gloss	Satin	Gloss	Satin	Satin		All tiles	All tiles
50x200					✓							Wall Only	Interior Only
200x250	✓			✓								Wall Only	Interior Only
200x500		✓						✓				Wall Only	Interior Only
250x330		✓		✓								Wall Only	Interior Only
250x400			✓									Wall Only	Interior Only
250x500								✓				Wall Only	Interior Only
335x600						✓	✓					Wall Only	Interior Only
300x900									✓	✓		Wall Only	Interior Only

# Regents

## GROUP / BIII - CERAMIC

### GLOSS

	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.5\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 10\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.3\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 10\%$	Ave >12%
Breaking strength	ISO 10545-4	$\geq 600\text{N}$	NPD
Modulus of rupture	ISO 10545-4	Ave Minimum 12 N/mm <sup>2</sup>	Ave 12 N/mm <sup>2</sup>
Thermal shock resistance	ISO 10545-1	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to stain	ISO 10545-14	Min Class 3	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Regents

## GROUP / BIII - CERAMIC

### SATIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.5\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 10\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.3\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 10\%$	Ave >10%
Breaking strength	ISO 10545-4	$\geq 600\text{N}$	$\geq 600\text{N}$
Modulus of rupture	ISO 10545-4	Ave Minimum 12 N/mm <sup>2</sup>	Ave 12 N/mm <sup>2</sup>
Thermal shock resistance	ISO 10545-1	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	Simply Satin Star - GLB Simply Satin - GLC
Resistance to stain	ISO 10545-14	Min Class 3	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Regents

## GROUP / BIII - CERAMIC

### BUMPY

	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.5\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 10\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.3\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 10\%$	Ave >18.8%
Breaking strength	ISO 10545-4	$\geq 600\text{N}$	Ave 547N
Modulus of rupture	ISO 10545-4	Ave Minimum 12 N/mm <sup>2</sup>	Ave 24 N/mm <sup>2</sup>
Thermal shock resistance	ISO 10545-1	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to stain	ISO 10545-14	Min Class 3	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Regents

## GROUP / BIII - CERAMIC

### WAVE AND GEOMETRIC

	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.5\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 10\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.3\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 10\%$	>10%
Breaking strength	ISO 10545-4	$\geq 600\text{N}$	$\geq 600\text{N}$
Modulus of rupture	ISO 10545-4	Ave Minimum 12 N/mm <sup>2</sup>	Ave min 12 N/mm <sup>2</sup>
Thermal shock resistance	ISO 10545-1	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to stain	ISO 10545-14	Min Class 3	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled content	%
Regents	15

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles