

# Borgen

4 COLOURS / 1 SIZE / 1 FINISH / 0 SPECIAL PIECES

Natural timber effect tiles that capture the essence of a Danish lifestyle with their neutral hues. A durable alternative to real wood floors, these porcelain tiles make a fantastic floor feature or can transform any wall.




Borgen




# Borgen



OAK

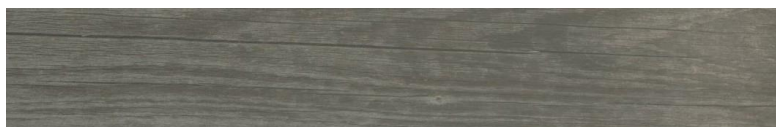

WALNUT

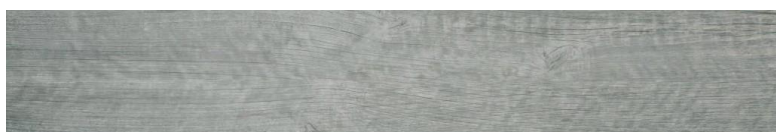

ASH



WHITE

Dimensions	150x900x9
Finish	Matt
Body	Porcelain
Wall/floor	Wall and floor
Group	Bla
Pendulum Dry	36+
Pendulum Wet	0-24
Recycled content	0-24



150X900x9

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Borgen

	Standard	Requirement	Typical test value
Length and width	ISO 10545-2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass
Thickness	ISO 10545-2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass
Straightness	ISO 10545-2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass
Flatness	ISO 10545-2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass
Rectangularity	ISO 10545-2	$\pm 0.5\% \leq \pm 2.0\text{mm}$	Pass
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Pass
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	Pass
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	Pass
Resistance to surface abrasion	ISO 10545-7	n/a	Class 3
Thermal shock resistance	ISO 10545-9	Complies with standard	Pass
Frost resistance	ISO 10545-12	Complies with standard	Pass
Resistance to chemicals	ISO 10545-14	Min Class B	Pass
Resistance to stain	ISO 10545-14	Min Class 3	Pass
Reaction to fire	-	Floor/wall Class A1 FL/A1	Pass

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles