

Monroe Concrete

8 COLOURS / **6** SIZES / **1** FINISHES / **0** SPECIAL PIECES

The Monroe range is made to please the most demanding designers and architects, with a combination of concrete, gloss, wood and mosaic options. The most extraordinary combinations can be created thanks to the assortment of 8 colour variations, 4 warm tones and 4 cold – different patterns are never repeated over around 10m² of product, producing original design schemes.



Monroe Concrete





Monroe Concrete



IVORT MATT



IVORY GRIP



CREAM MATT



CREAM GRIP



CREAM TEXTURED




CLAY MATT



CLAY GRIP




CLAY TEXTURED




TAUPE MATT




TAUPE GRIP




TAUPE TEXTURED




TOBACCO MATT



TOBACCO GRIP



TOBACCO TEXTURED




TAUPE TEXTURED



3D URBAN IVORY WALL


Monroe Concrete



IVORT MATT




IVORY GRIP



CREAM MATT




CREAM GRIP




CREAM TEXTURED



CLAY MATT



CLAY GRIP




CLAY TEXTURED



TAUPE MATT



TAUPE GRIP



TAUPE TEXTURED



TOBACCO MATT



TOBACCO GRIP



TOBACCO TEXTURED



TAUPE TEXTURED




3D URBAN IVORY WALL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Monroe Concrete

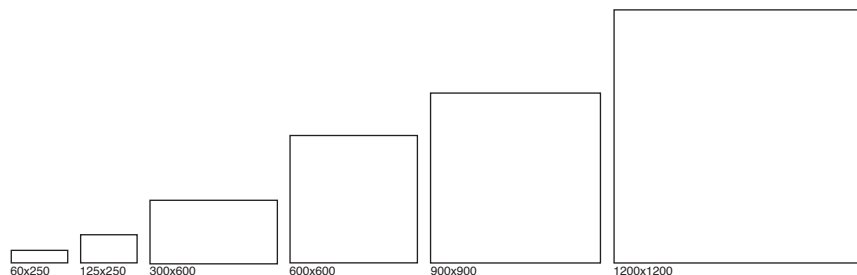

GROUP / Bla - PORCELAIN

| | Standard | Requirement | Established values |
|---|--------------|-----------------------------------|-----------------------------|
| Length and width | ISO 10545-2 | $\pm 0.6\% \sim \pm 2\text{mm}$ | Conforms |
| Thickness | ISO 10545-2 | $\pm 5\% \sim \pm 0.5\text{mm}$ | Conforms |
| Straightness | ISO 10545-2 | $\pm 0.5\% \sim \pm 1.5\text{mm}$ | Conforms |
| Flatness | ISO 10545-2 | $\pm 0.5\% \sim \pm 2.0\text{mm}$ | Conforms |
| Rectangularity | ISO 10545-2 | $\pm 0.5\% \sim \pm 2.0\text{mm}$ | Conforms |
| Water absorption | ISO 10545-3 | $E_b \leq 0.5\%$ | Ave 0.5% |
| Breaking strength | ISO 10545-4 | $\geq 1300\text{N}$ | Ave $\geq 2000\text{N}$ |
| Modulus of rupture | ISO 10545-4 | Ave min 35 N/mm^2 | Ave min 45 N/mm^2 |
| Resistance to deep abrasion (unglazed tiles) | ISO 10545-6 | $< 175\text{mm}^2$ | Ave 175mm^2 |
| Frost resistance | ISO 10545-12 | Pass according to EN ISO 10545-1 | Resistant |
| Thermal shock resistance | ISO 10545-9 | Pass according to EN ISO 10545-1 | Resistant |
| Resistance to household chemicals and swimming pool salts | ISO 10545-13 | Min Class UB | UA |
| Resistance to high concentrations of alkalis and acids | ISO 10545-13 | Declare value | UHA |
| Resistance to low concentrations of alkalis and acids | ISO 10545-13 | Declare value | ULA |
| Resistance to stain | ISO 10545-14 | Declare value | Class 5 |
| Reaction to fire | - | Class A1 A1/FL | A1 A1/FL |

| Recycled content | % |
|------------------|----|
| 1200x1200 | 10 |
| All other sizes | 12 |

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles