


Blakes

7 COLOURS / 1 SIZES / 1 FINISHES / 0 SPECIAL PIECES

The Blakes ceramic wall tile range has a delicate crackle in 7 colours and a gloss finish that will help reflect light and show off the shade variation. This ceramic tile measures 100x200mm. This range has 0% recycled content.

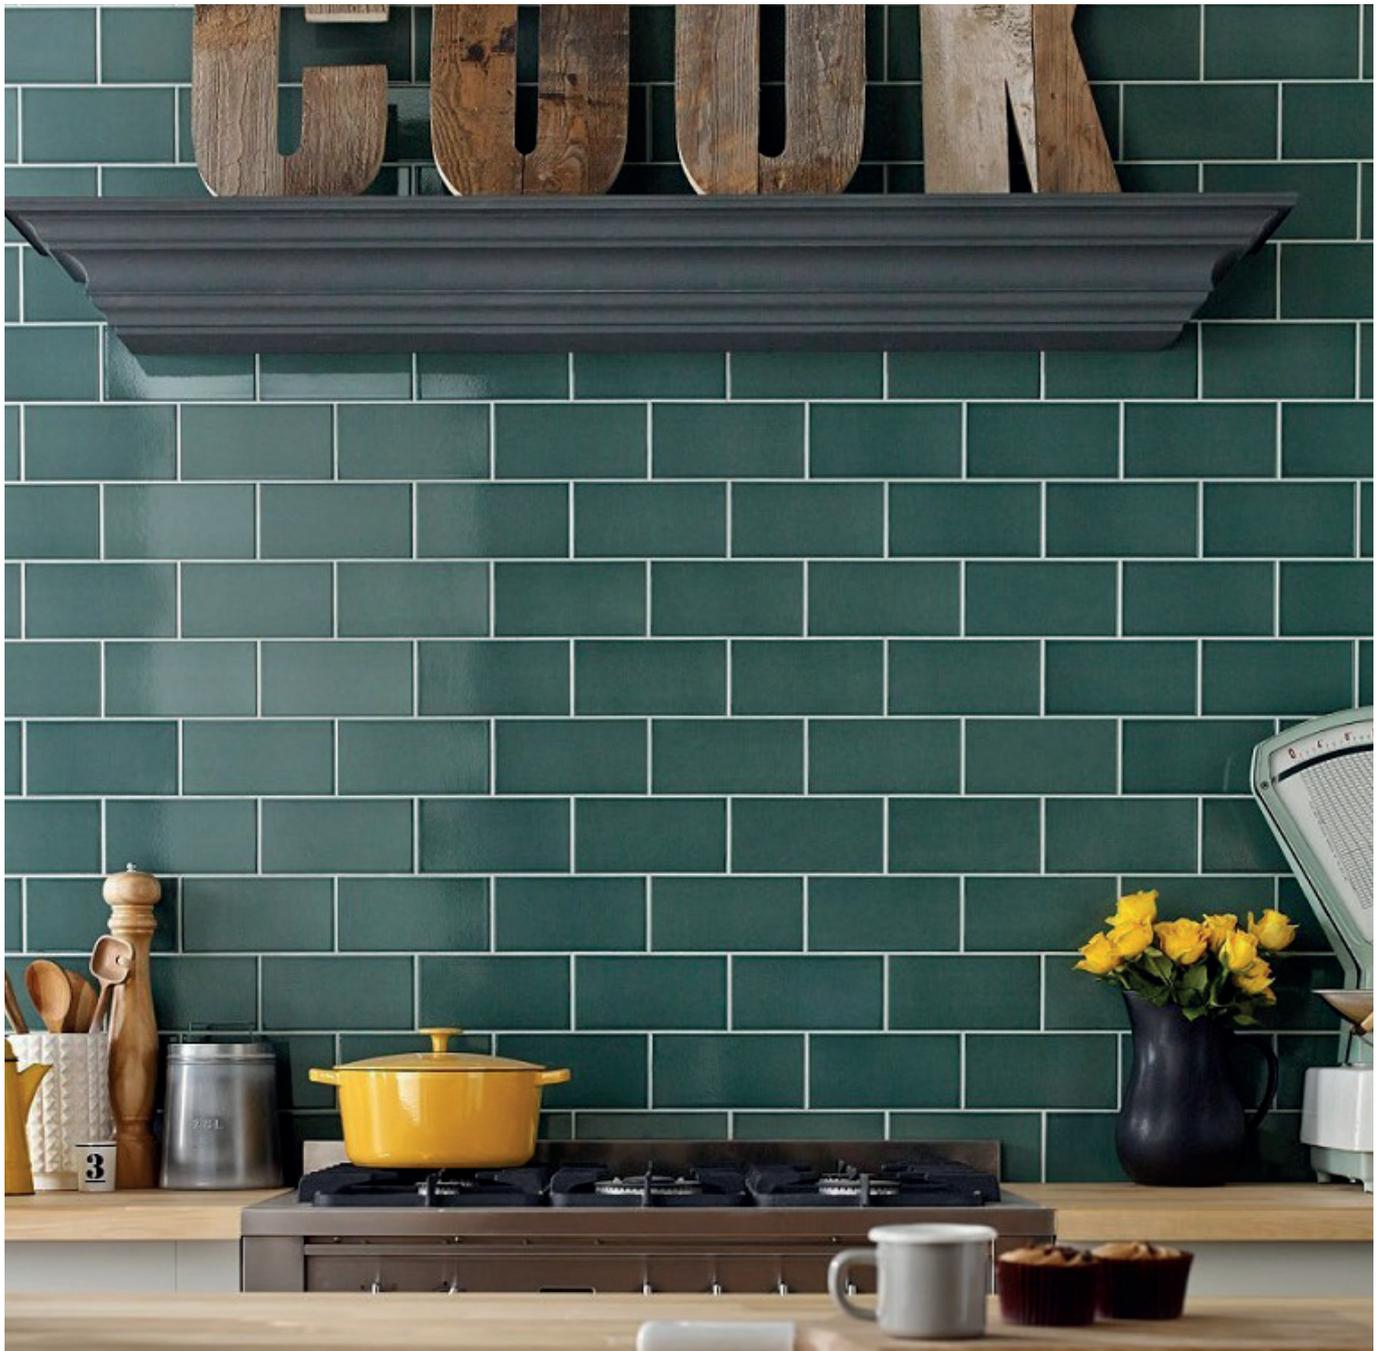

Blakes



Blakes



WHITE



IVORY



DUCK EGG



SAGE



GREY



GREEN



BLUE

Ceramic	7mm thick	Wall/floor	Interior/exterior
	Matt	All tiles	All tiles
100X200	✓	Wall	Interior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Blakes



200x100

GROUP / Bla - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.5\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 10\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.3\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_w \leq 10\%$	Ave 14%
Breaking strength	ISO 10545-4	$\geq 600\text{N}$	Ave 338N**
Modulus of rupture	ISO 10545-4	Ave Minimum 12 N/mm ²	12 N/mm ²
Thermal shock resistance	ISO 10545-1	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GC
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHC
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLC
Resistance to stain	ISO 10545-14	Min Class 3	Class 3*
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

*Please note: Crackle glazed tiles require sealing. Once sealed Class 3 can be achieved with the range.

**Breaking strength is not applicable for a wall tile and is not a mandated characteristic.

Recycled content	%
Blakes	0

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles