


# Blocks

2 COLOURS / 4 SIZES / 1 FINISHES / 0 SPECIAL PIECES

Ceramic, a noble, naked material forming a patchwork of formats, a wooden craft a vision that recreates artisanal sensations, the irregularities and vibrations are all aspects of the character that determines the personality of this series. The extrusion process a language that conveys the content and ennobles his dialectic. There is a gold wall decor available as part of this collection in 35x140. This is suitable for wall only application.

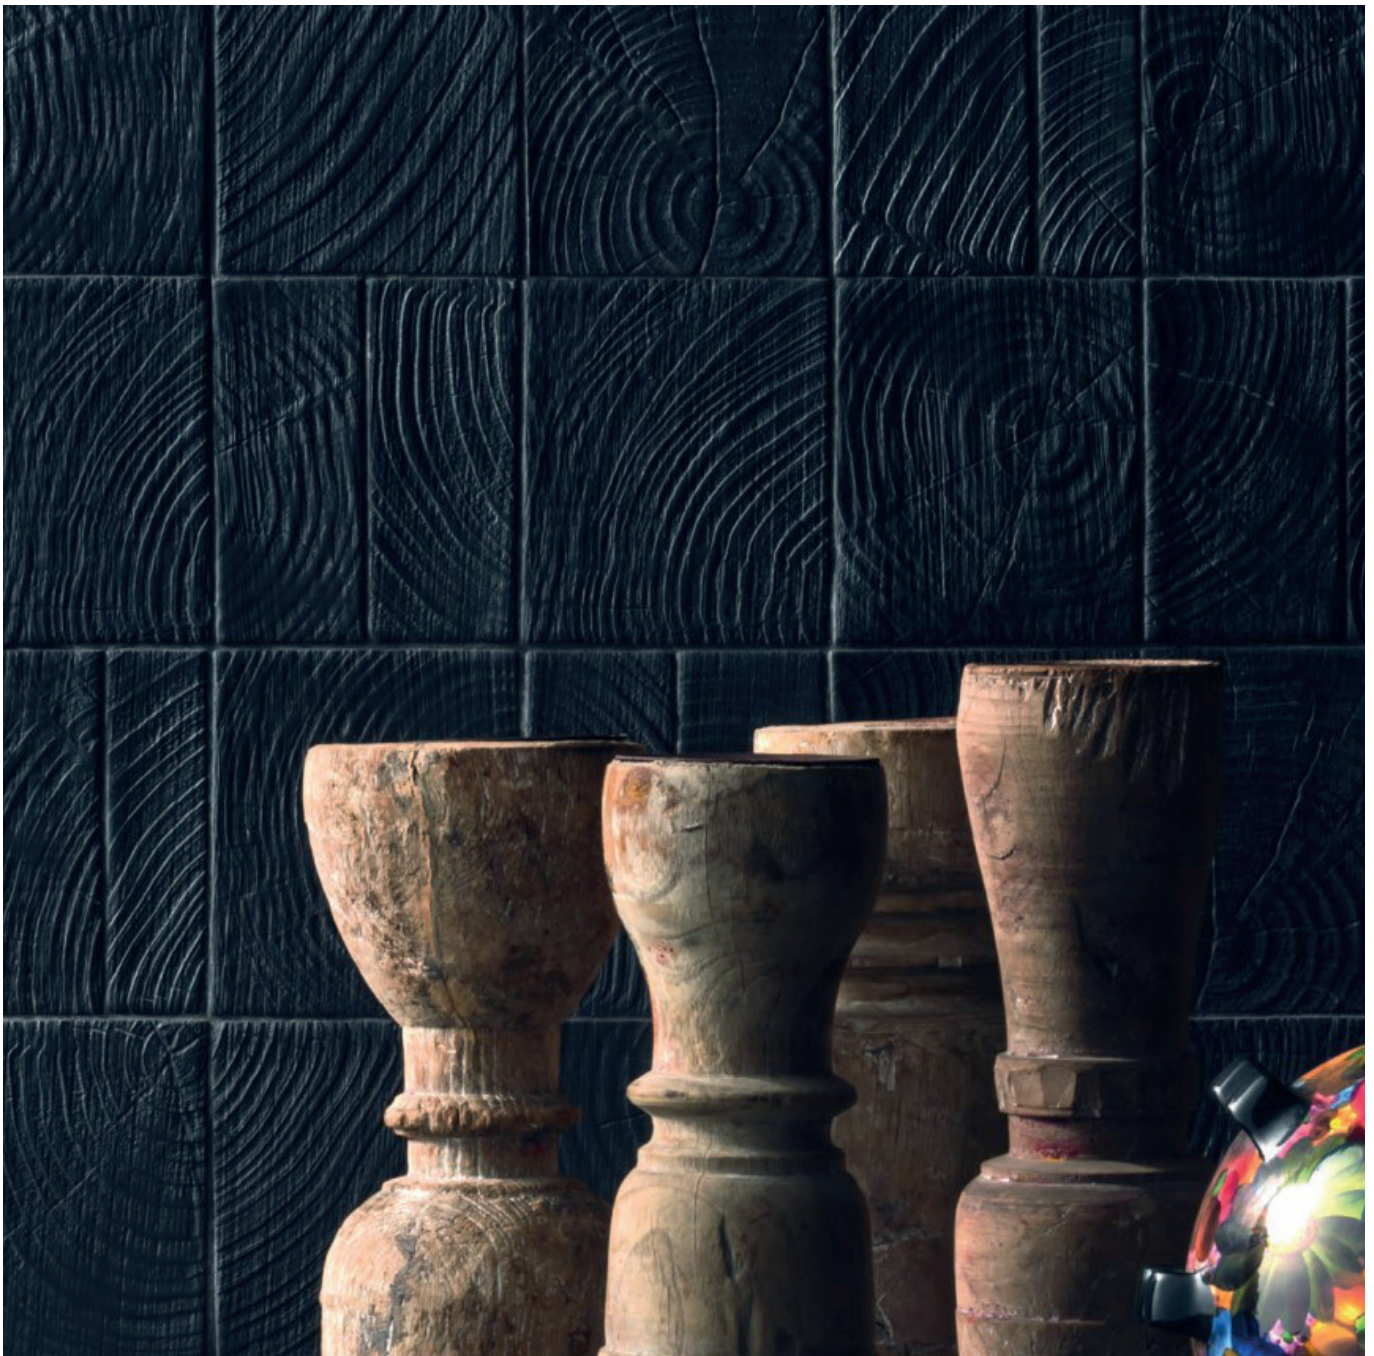

# Blocks



# Blocks



# Blocks



WHITE



BLACK


Porcelain	8mm thick	Wall/floor	Interior/exterior
	Matt	All tiles	All tiles
Modular pack; 115x140, 75x140, 55x140, 35x140	✓	Wall and floor	Interior
35x140 Gold	✓	Wall	Interior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Blocks

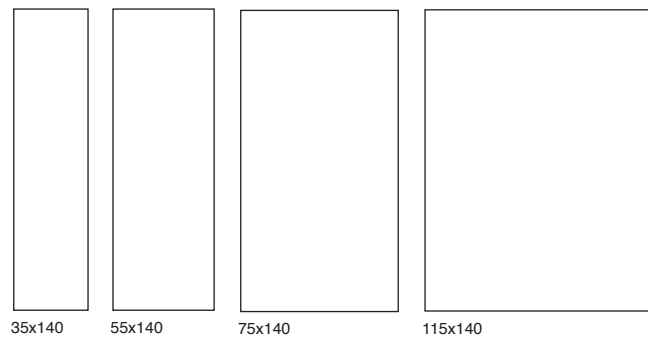

## GROUP / BLA - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave 0.3%
Breaking strength	ISO 10545-4	≥ 1300N	Ave >1300N
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	Ave 30 N/mm <sup>2</sup>
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	< 175mm <sup>3</sup>	Ave 165mm <sup>3</sup>
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to stain	ISO 10545-14	Declare Value	Class 4
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled content	%
Blocks	-

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles