

Concretech

12 COLOURS / 7 SIZES / 3 FINISHES / 0 SPECIAL PIECES

The latest creative experiments with clays inspire a collection with impressive technical properties, that investigates the bond between matter and colour. 7 colours, in earthy shades with recently developed powdery variants, and an assortment of decors that explore irregular patterns and graphic motifs.



Concretech





Concretech



AVORIO



CANNELLA



SENAPE



VINACCIA



POLVERE




SALVIA



GRAFITE



CANNELLA FRAME MOSAIC



SENAPE FRAME MOSAIC



VINACCIA FRAME MOSAIC



AVORIO FRAME MOSAIC



POLVERE FRAME MOSAIC



SALVIA FRAME MOSAIC



GRAFITE FRAME MOSAIC

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Concretech



AVORIO MOSAIC



SALVIA MOSAIC



POLVERE MOSAIC



GRAFITE MOSAIC



SENAPE MOSAIC



CANNELLA MOSAIC



VINACCIA MOSAIC



AVORIO 3D MOSAIC



CANNELLA 3D MOSAIC



SENAPE 3D MOSAIC



VINACCIA 3D MOSAIC



POLVERE 3D MOSAIC



SALVIA 3D MOSAIC




GRAFITE 3D MOSAIC

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Concretech

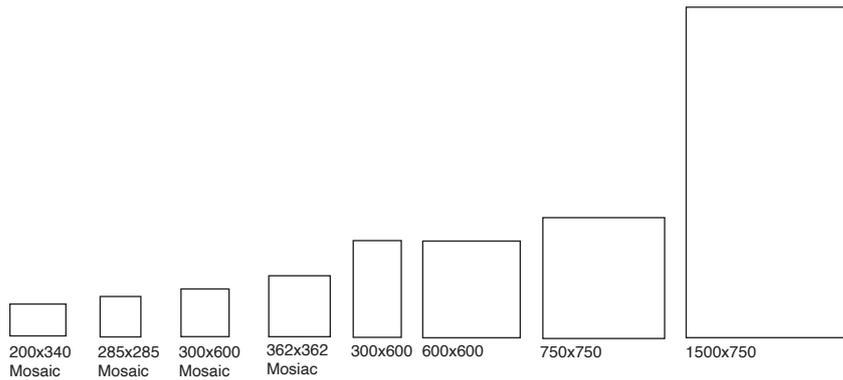

PORCELAIN	10mm thick		10.5mm thick	Wall/floor	Interior/exterior
	Matt	Structured		All tiles	All tiles
750x750	✓	✓		Wall and floor	Interior and exterior
750x1500			✓	Wall and floor	Interior and exterior
600x600	✓			Wall and floor	Interior and exterior
600x300	✓	✓		Wall and floor	Interior and exterior
362x362 Mosaic	✓			Wall and floor	Interior
300x300 Mosaic	✓			Wall and floor	Interior and exterior
285x285 Mosaic	✓			Wall and floor	Interior and exterior
200x340 Decor	✓			Wall	Interior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

GROUP / Bla PORCELAIN

Range	Standard	Requirement	Typical test value
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	$\leq 0.5\%$
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	$\geq 1300\text{N}$
Modulus of rupture	ISO 10545-4	35 N/mm ² Average min	35 N/mm ² Average min
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	$\leq 175\text{mm}^2$	Ave $\leq 175\text{mm}^2$
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare value	UHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare value	ULB
Resistance to stain	ISO 10545-14	Min Class 3	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Slip resistance characteristics	Pendulum Dry (4S Slider 96) +36 PTV	Pendulum Wet (4S Slider 96) +36 PTV
Full range	✓	✓

Recycled content	%
Avorio, Cannella & Senape	10
Vinaccia, Grafite & Salvia	21

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles