


Coulter

16 COLOURS / 3 SIZES / 2 FINISHES / 0 SPECIAL PIECES


Coulter gives you complete freedom to create a unique design with 15 colours available. The hues cover a variety of moods from tranquil and comforting to vibrant and energetic. This range contains 0% recycled content. All of the colours are available in a gloss finish with the white also available in a matt finish (Branco Mate).




Coulter




BRANCO MATE




CINZA CLARO MU24




BRANCO BRILHANTE



PEROLA MU91



CASTANHO MU32




CASTANHO MU33




PRETO MU00



AMARELO MU58



LILAS MU00




AZUL NATUREZA MU 47



AZUL MEDIO MU48



AZUL MU42




VERDE PASTEL MU53



VERDE CLARO MU50



VERDE ESCURO MU52




CINZA ESCURO MU25

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Coulter

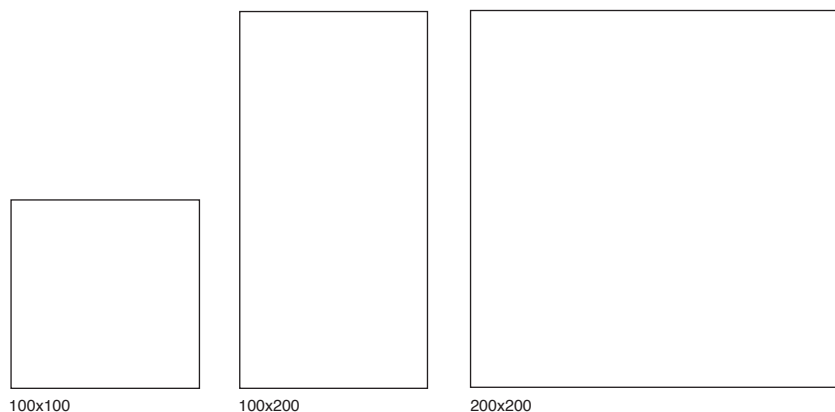

| Ceramic | 6.5mm thick | 6.5mm thick | Wall/floor |
|---------|-------------|-------------|------------|
| | Gloss | Matt* | All tiles |
| 100x200 | ✓ | ✓ | Wall |
| 200x200 | ✓ | ✓ | Wall |
| 100x100 | ✓ | ✓ | Wall |

*Available in white only

| Size options | |
|--------------|--|
| 200x200 | All colours |
| 100x200 | Branco Mate, Branco Brilhante, Cinza Escuro MU25, Perola MU91, Preto MU00, Amarelo MU58, Azul MU42, Verde Pastel MU53 and Verde Claro MU50 |
| 100x100 | Branco Mate, Branco Brilhante, Cinza Escuro MU25, Perola MU91, Preto MU00, Amarelo MU58 and Azul MU42 |

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Coulter

GROUP / BIII - CERAMIC

| | Standard | Requirement | Established values |
|---|--------------|-----------------------------------|------------------------------|
| Length and width | ISO 10545-2 | $\pm 0.5\% \sim \pm 2\text{mm}$ | Conforms |
| Thickness | ISO 10545-2 | $\pm 10\% \sim \pm 0.5\text{mm}$ | Conforms |
| Straightness | ISO 10545-2 | $\pm 0.3\% \sim \pm 1.5\text{mm}$ | Conforms |
| Flatness | ISO 10545-2 | $\pm 0.5\% \sim \pm 2.0\text{mm}$ | Conforms |
| Rectangularity | ISO 10545-2 | $\pm 0.5\% \sim \pm 2.0\text{mm}$ | Conforms |
| Water absorption | ISO 10545-3 | $E_b \leq 10\%$ | $E_b > 10\%$ |
| Breaking strength | ISO 10545-4 | $\geq 600\text{N}$ | Ave $\geq 600\text{N}$ |
| Modulus of rupture | ISO 10545-4 | Ave Minimum 12 N/mm ² | Ave min 12 N/mm ² |
| Thermal shock resistance | ISO 10545-1 | Pass according to EN ISO 10545-1 | Resistant |
| Resistance to household chemicals and swimming pool salts | ISO 10545-13 | Min Class GB | GA |
| Resistance to high concentrations of alkalis and acids | ISO 10545-13 | Declare Value | NPD |
| Resistance to low concentrations of alkalis and acids | ISO 10545-13 | Declare Value | GLA |
| Resistance to stain | ISO 10545-14 | Declare Value | Class 3 |
| Reaction to fire | - | Class A1 A1/FL | A1 A1/FL |

| | |
|------------------|---|
| Recycled content | % |
| Coulter | 0 |

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles