

Dawson Natural

7 COLOURS / 6 SIZES / 3 FINISHES / 28 SPECIAL PIECES

A concrete effect tile, Dawson Natural was born from the influence of raw earth and the creativity of Italian architecture. Viewed from afar, the surfaces of Dawson Natural convey a neutral, powdery look, opaque in the light, with slight colour variations. On closer inspection, they reveal the random but subtle marks of manually worked raw earth with slight irregularities to the hand and eye.



Dawson Natural



Dawson Natural




Dawson Natural



KAOLIN MATT



ASH MATT




ECRU MATT



UMBER MATT



COAL MATT



COBALT MATT




CORAL MATT



KAOLIN GRIP



ASH GRIP



ECRU GRIP




UMBER GRIP



COAL GRIP



KAOLIN TEXTURED



ASH TEXTURED



ECRU TEXTURED

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Dawson Natural




KAOLIN MOSAIC RHOMBUS




ASH MOSAIC RHOMBUS



ECRU MOSAIC RHOMBUS



UMBER MOSAIC RHOMBUS



COAL MOSAIC RHOMBUS



CORAL MOSAIC RHOMBUS



COBALT MOSAIC RHOMBUS



KAOLIN TUMBLED MOSAIC




ASH TUMBLED MOSAIC



ECRU TUMBLED MOSAIC



UMBER TUMBLED MOSAIC



COAL TUMBLED MOSAIC



COBALT TUMBLED MOSAIC



CORAL TUMBLED MOSAIC

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Dawson Natural




WHITE MOSAIC
WALL/FLOOR




PEARL MOSAIC
WALL/FLOOR



GREY MOSAIC
WALL/FLOOR



SMOKE MOSAIC
WALL/FLOOR



TARMAC MOSAIC
WALL/FLOOR



IVORY MOSIAC
WALL/FLOOR




CREAM MOSIAC
WALL/FLOOR



CLAY MOSIAC WALL/FLOOR



TAUPE MOSIAC
WALL/FLOOR



TOBACCO MOSIAC
WALL/FLOOR



WARM CUBE



COLD CUBE

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Dawson Natural




WHITE BRICK MOSAIC SHEET




PEARL BRICK MOSAIC SHEET



GREY BRICK MOSAIC SHEET



SMOKE BRICK MOSAIC SHEET



TARMAC BRICK MOSAIC SHEET



IVORY BRICK MOSAIC SHEET



CREAM BRICK MOSAIC SHEET



CLAY BRICK MOSAIC SHEET



TAUPE BRICK MOSAIC SHEET




TOBACCO BRICK MOSAIC SHEET

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Dawson Natural

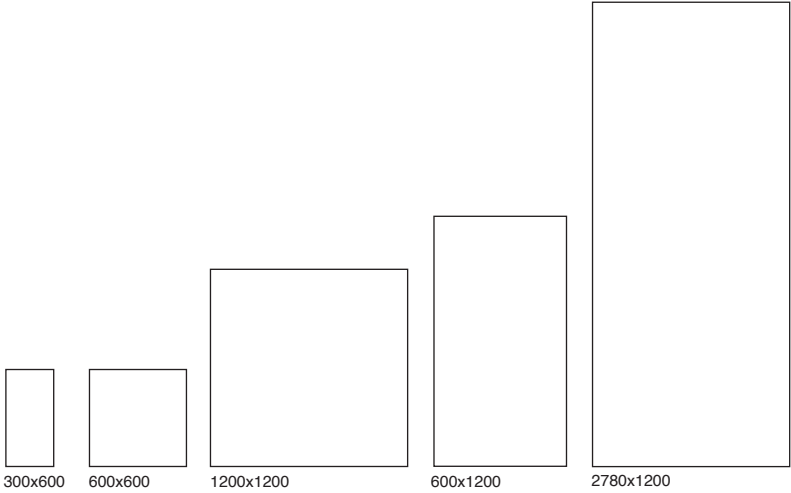

PORCELAIN	6mm thick	9mm thick	9mm thick	20mm thick	Wall/floor	Interior/exterior
	Matt	Matt	Grip	Textured	All tiles	All tiles
1200x2780	✓				Wall only	Interior and exterior
1200x1200		✓	✓	✓	9mm wall and floor 20mm floor only	9mm interior and exterior 20mm exterior only
600x1200		✓	✓		Wall and floor	Interior and exterior
600x600		✓		✓	9mm Wall and floor 20mm floor only	9mm interior and exterior 20mm exterior only
300x600		✓			Wall and floor	Interior/exterior

CERAMIC	8.5mm thick	Wall/floor	Interior/exterior
	Matt	All tiles	All tiles
500x1200	✓	Wall only	Interior only
500x1200 3D	✓	Wall only	Interior only

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Dawson Natural

GROUP / Bla PORCELAIN

Range	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave $\leq 0.5\%$
Breaking strength	ISO 10545-4	$\geq 1300\text{ N}$	$\geq 1300\text{ N}$
Modulus of rupture	ISO 10545-4	35 N/mm ² Average min	35 N/mm ² Average min
Resistance to surface abrasion	ISO 10545-7	Declare Class	PEI4
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare value	NPD
Resistance to stain	ISO 10545-14	Declare value	Class 3
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Slip resistance characteristics	Pendulum Dry (4S Slider 96 +36 PTV)	Pendulum Wet (4S Slider 96 +36 PTV)
Full range		

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles