

# Dawson Pro

7 COLOURS / 13 SIZES / 3 FINISHES / 27 SPECIAL PIECES

Concrete effect range Dawson Pro complements the colour range of the Dawson collection by adding five warm shades on the same surface, creating a unique colour palette in terms of breadth and variety. On the walls, the dusty accents of the Mustard and Powder Blue make it possible to create creative spaces with a strong personality.








## Dawson Pro




Dawson Pro




IVORT MATT



IVORY GRIP



CREAM MATT




CREAM GRIP



CREAM TEXTURED



CLAY MATT




CLAY GRIP



CLAY TEXTURED




TAUPE MATT




TAUPE GRIP




TAUPE TEXTURED



TOBACCO MATT



TOBACCO GRIP



TOBACCO TEXTURED



TAUPE TEXTURED



3D URBAN IVORY WALL



3D URBAN POWDER BLUE WALL




3D URBAN CLAY WALL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Dawson Pro




LEAVES WALL DECOR




GROVE WALL DECOR



PAINT WALL DECOR



IVORY MOSAIC WALL/  
FLOOR




CREAM MOSAIC WALL/  
FLOOR




CLAY MOSAIC WALL/  
FLOOR




TAUPE MOSAIC WALL/  
FLOOR



TOBACCO MOSAIC WALL/  
FLOOR




IVORY HEX MOSAIC




CREAM HEX MOSAIC



TAUPE HEX MOSAIC




IVORY SHAPES MOSAIC




CREAM SHAPES MOSAIC



CLAY SHAPES MOSAIC



TAUPE SHAPES MOSAIC



TOBACCO SHAPES MOSAIC



IVORY CERAMIC WALL



CREAM CERAMIC WALL



CLAY CERAMIC WALL



MUSTARD CERAMIC  
WALL



POWDER BLUE CERAMIC  
WALL




IVORY MINIBRICK  
MOSAIC WALL




CREAM MINIBRICK  
MOSAIC WALL



CLAY MINIBRICK  
MOSAIC WALL




MUSTARD MINIBRICK  
MOSAIC WALL



POWDER BLUE MINIBRICK  
MOSAIC WALL

Dawson Pro

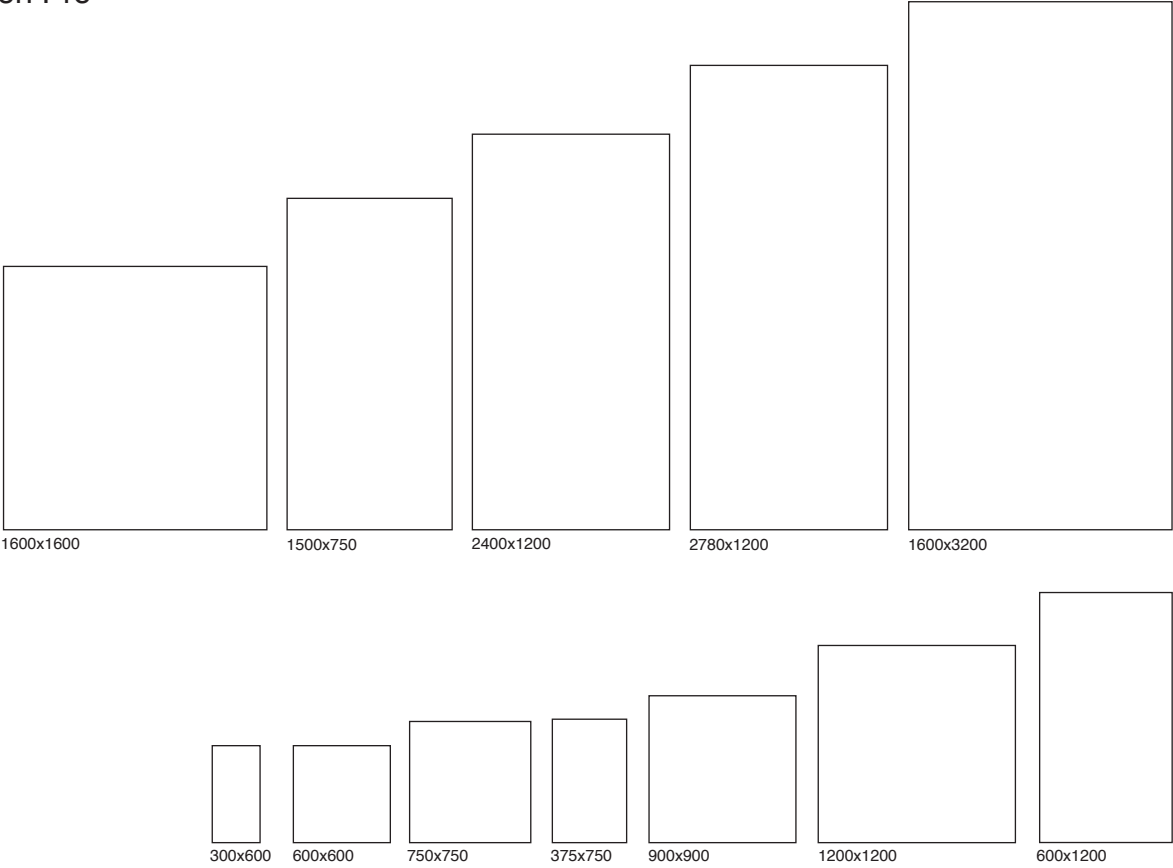

PORCELAIN	6mm thick	9mm thick	9mm thick	20mm thick	8.5mm thick	Wall/floor	Interior/exterior
	Matt	Matt	Grip	Textured	Matt	All tiles	All tiles
1600x3200	✓					Wall and floor	Interior/exterior
1600x1600	✓					Wall and floor	Interior/exterior
1200x2780	✓					Wall only	Interior/exterior
1200x2400		✓	✓	✓		Wall and floor	Interior/exterior
1200x1200	✓	✓	✓	✓		Wall and floor	Interior/exterior
750x1500		✓				Wall and floor	Interior/exterior
600x1200		✓	✓	✓		Wall and floor	Interior/exterior
900x900			✓	✓		Floor only	Interior/exterior
750x750		✓				Wall and floor 20mm floor only	Interior/exterior 20mm exterior only
375x750		✓				Wall and floor 20mm floor only	Interior/exterior 20mm exterior only
600x600		✓	✓	✓		Wall and floor 20mm floor only	Interior/exterior 20mm exterior only
300x600		✓				Wall and floor 20mm floor only	Interior/exterior 20mm exterior only

CERAMIC	8.5mm thick	10mm thick	Wall/floor	Interior/exterior
	Matt	Matt	All tiles	All tiles
400x800	✓		Wall/floor	Interior only
400x800 3D		✓	Wall/floor	Interior only

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Dawson Pro

## GROUP / Bla PORCELAIN

Range	Standard	Requirement	Typical test value
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave $\leq 0.5\%$
Breaking strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of rupture	ISO 10545-4	35 N/mm <sup>2</sup> Average min	35 N/mm <sup>2</sup> Average min
Resistance to surface abrasion	ISO 10545-7	Declare Class	PEI4
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare value	NPD
Resistance to stain	ISO 10545-14	Min Class 3	Class 3
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Slip resistance characteristics	Pendulum Dry (4S Slider 96) +36 PTV	Pendulum Wet (4S Slider 96) +36 PTV
Full range		

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles