

# Dawson Stone

**10 COLOURS / 5 SIZES / 3 FINISHES / 24 SPECIAL PIECES**

Dawson Stone is a collection of porcelain floor and wall tiles conceived to offer the world of design a modern stone effect tile. Inspired by the limestone quarried from the Pyrenees and produced in a range of neutral tones, it allows you to create environments with strong contemporary accents.





Dawson Stone



Dawson Stone





# Dawson Stone



WHITE MATT



PEARL MATT



GREY MATT



SMOKE MATT



TARMAC MATT



IVORY MATT




CREAM MATT



CLAY MATT



TAUPE MATT



TOBACCO MATT



WHITE TEXTURED



CREAM TEXTURED



CLAY TEXTURED



GREY TEXTURED



SMOKE TEXTURED



TARMAC TEXTURED

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Dawson Stone



WHITE GRIP



PEARL GRIP



GREY GRIP




SMOKE GRIP



TARMAC GRIP



IVORY GRIP




CREAM GRIP



CLAY GRIP



TAUPE GRIP




TOBACCO GRIP



WHITE HEX MOSAIC




PEARL HEX MOSAIC



GREY HEX MOSAIC



SMOKE HEX MOSAIC



TARMAC HEX MOSAIC



IVORY HEX MOSAIC




CREAM HEX MOSAIC



CLAY HEX MOSAIC



TAUPE HEX MOSAIC



TOBACCO HEX MOSAIC

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Dawson Stone




WHITE MOSAIC  
WALL/FLOOR




PEARL MOSAIC  
WALL/FLOOR



GREY MOSAIC  
WALL/FLOOR



SMOKE MOSAIC  
WALL/FLOOR



TARMAC MOSAIC  
WALL/FLOOR



IVORY MOSIAC  
WALL/FLOOR




CREAM MOSIAC  
WALL/FLOOR



CLAY MOSIAC WALL/FLOOR



TAUPE MOSIAC  
WALL/FLOOR



TOBACCO MOSIAC  
WALL/FLOOR



WARM CUBE



COLD CUBE

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles



# Dawson Stone




WHITE BRICK MOSAIC SHEET




PEARL BRICK MOSAIC SHEET



GREY BRICK MOSAIC SHEET



SMOKE BRICK MOSAIC SHEET



TARMAC BRICK MOSAIC SHEET



IVORY BRICK MOSAIC SHEET



CREAM BRICK MOSAIC SHEET



CLAY BRICK MOSAIC SHEET



TAUPE BRICK MOSAIC SHEET




TOBACCO BRICK MOSAIC SHEET

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Dawson Stone

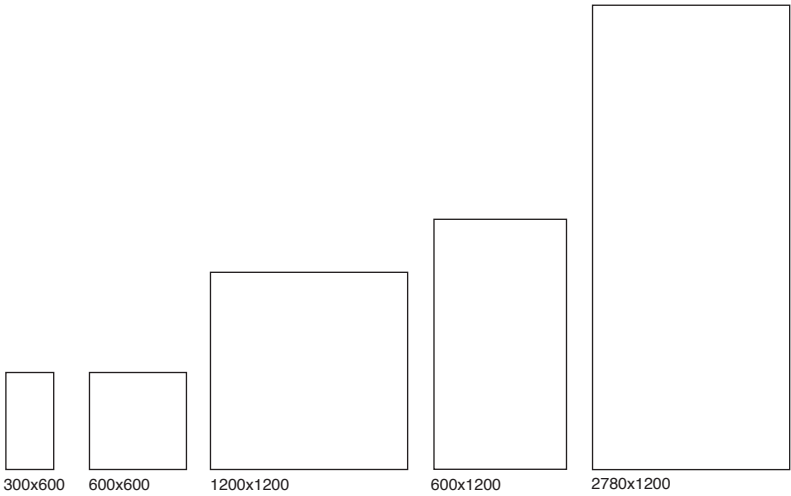

PORCELAIN	6mm thick	9mm thick	9mm thick	20mm thick	Wall/floor	Interior/exterior
	Matt	Matt	Grip	Textured	All tiles	All tiles
1200x2780	✓				Wall only	Interior and exterior
1200x1200		✓		✓	9mm wall and floor 20mm floor only	9mm interior and exterior 20mm exterior only
600x1200		✓	✓	✓	9mm wall and floor 20mm floor only	9mm interior and exterior 20mm exterior only
600x600		✓		✓	Wall and floor 20mm floor only	9mm interior and exterior 20mm exterior only
300x600		✓	✓		Wall and floor	Interior/exterior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles



# Dawson Stone

## GROUP / Bla PORCELAIN

Range	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave $\leq 0.5\%$
Breaking strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of rupture	ISO 10545-4	35 N/mm <sup>2</sup> Average min	35 N/mm <sup>2</sup> Average min
Resistance to surface abrasion	ISO 10545-7	Declare Class	PEI4
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare value	NPD
Resistance to stain	ISO 10545-14	Declare value	Class 3
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Slip resistance characteristics	Pendulum Dry (4S Slider 96) +36 PTV	Pendulum Wet (4S Slider 96) +36 PTV
Full range		

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles