


Enna

5 COLOURS / 1 SIZES / 2 FINISHES / 0 SPECIAL PIECES


Enna is a unique, geometric 3D patterned wall collection. With an on trend colour palette it has the potential to create some dramatic bold spaces. The collection is extruded porcelain giving it a handmade feel. The 3D surface pattern also lends itself to multiple laying patterns each creating an individual space.

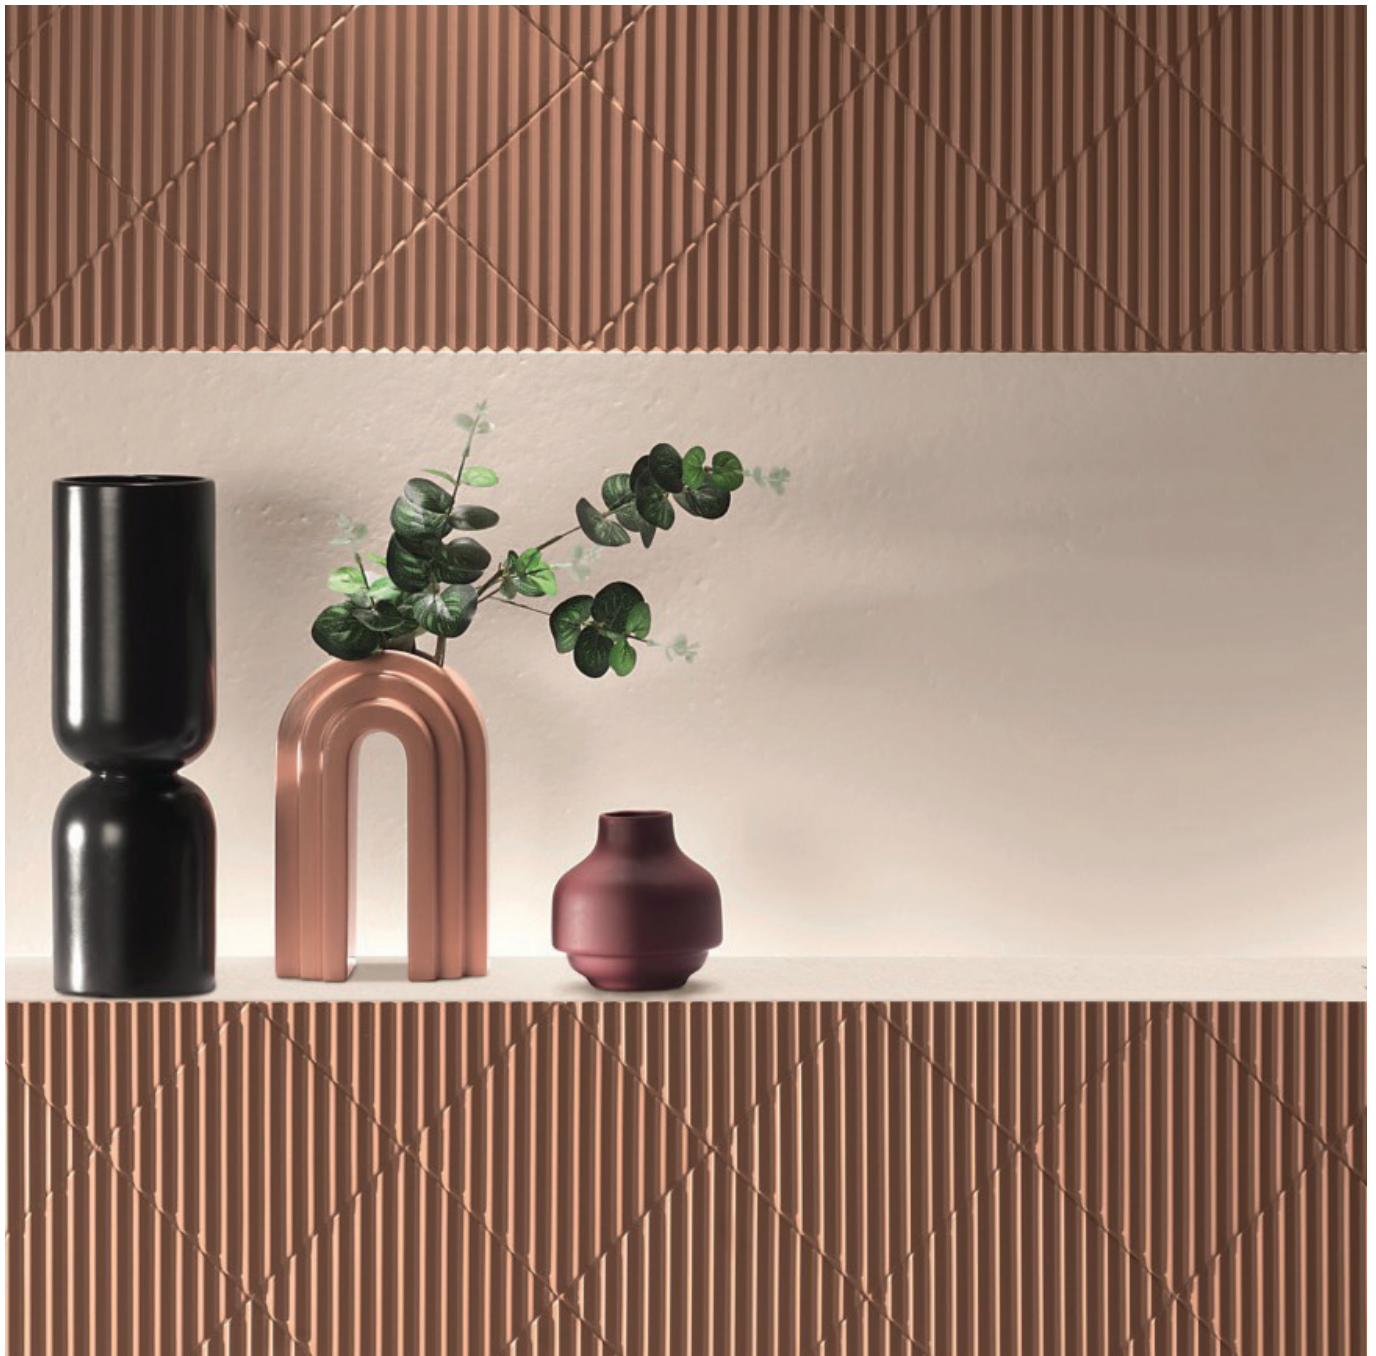


Enna




Enna

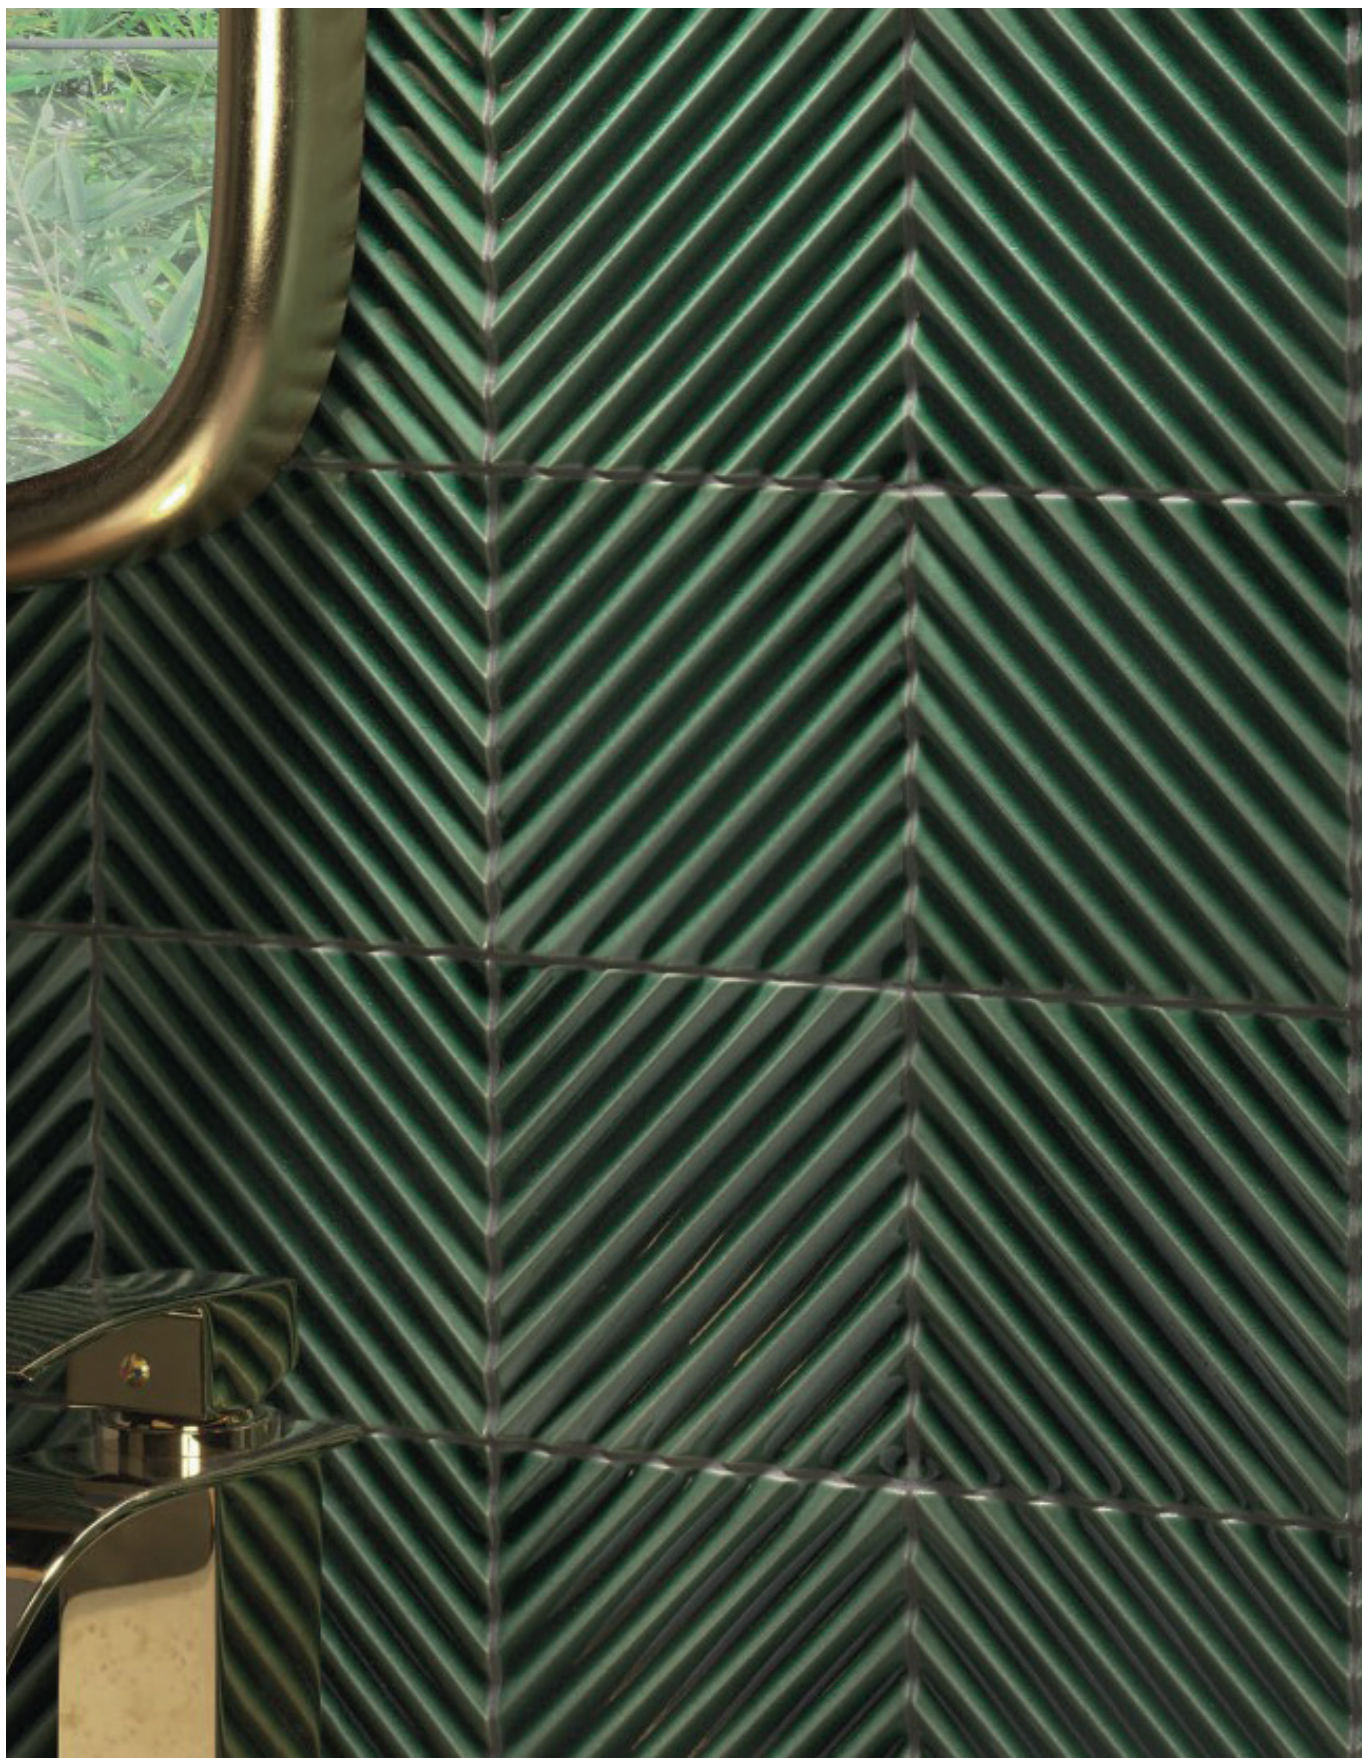

Enna




GROOVE VERDE CRAQ




GROOVE TURCHESE CRAQ




GROOVE BIANCO




GROOVE METALLO




GROOVE CALDAIA




RIDGE VERDE CRAQ



RIDGE TURCHESE CRAQ



RIDGE BIANCO




RIDGE METALLO

Porcelain	Wall/floor		
	Matt	Gloss	All tiles
130x130	✓	✓	Wall

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles



130x130

GROUP / A1a PORCELAIN

Range	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave $\leq 0.5\%$
Breaking strength	ISO 10545-4	≥ 1300 N	Ave ≥ 1300 N
Modulus of rupture	ISO 10545-4	Average min 28 N/mm ²	Average min 35 N/mm ²
Resistance to deep abrasion	ISO 10545-7	Declare Class	NPD
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare value	GLA
Resistance to stain	ISO 10545-14	Declare value	Class 3
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles