

Glass Blocks

4 COLOURS / 1 SIZES / 1 FINISHES / 0 SPECIAL PIECES

Two materials merging into one. Two galaxies coming together. Semitransparency. Light without image, illuminating without exposing. Geometric perfection. Squares on squares, rows and columns. Seriousness, effort, ambition. Resilience of scratched, used surfaces that survived everything but still see the dream like the first day.



Glass Blocks



Glass Blocks




Glass Blocks




GLASS AZURE



GLASS GREEN

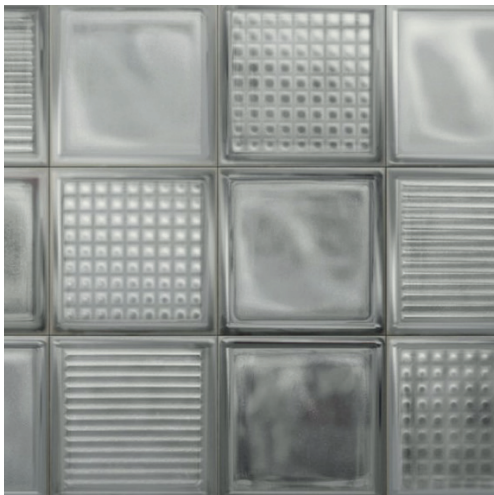

GLASS DUSTY WHITE

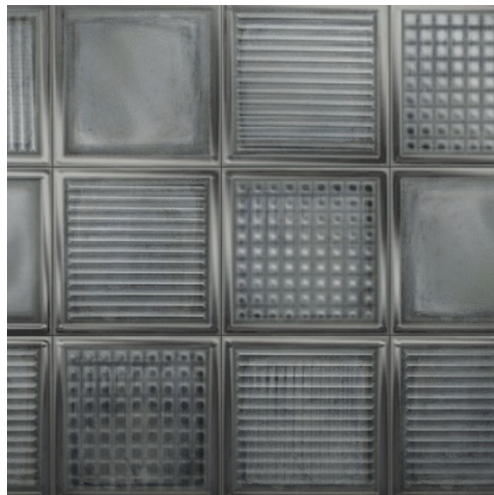

GLASS DUSTY BLACK


Glass tiles		Wall/floor
	Gloss	All colours
200x200	✓	Wall

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Glass Blocks



200x200

GROUP / BIII - CERAMIC

	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b > 10\%$	Ave 16%
Breaking strength	ISO 10545-4	$\geq 600\text{N}$	Ave 800N
Modulus of rupture	ISO 10545-4	Ave min 12 N/mm ²	Ave 22 N/mm ²
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	-
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	-
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to stain	ISO 10545-14	Declare Value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles