

Hedgebury

1 COLOURS / **4** SIZES / **1** FINISHES / **0** SPECIAL PIECES


Stone effect range Hedgebury offers the style of natural stone without the level of maintenance usually required, completely versatile enough to fit in with almost any style. Available as a single tile in 627x447mm or a modular pack that contains 1 x 672x447mm, 2 x 447x447mm, 1 x 222x447mm and 2 x 222x222mm, allowing you to get creative with laying options. Hedgebury is rated PTV 36+ shod foot. This range contains 37% recycled content.



Hedgebury



Hedgebury

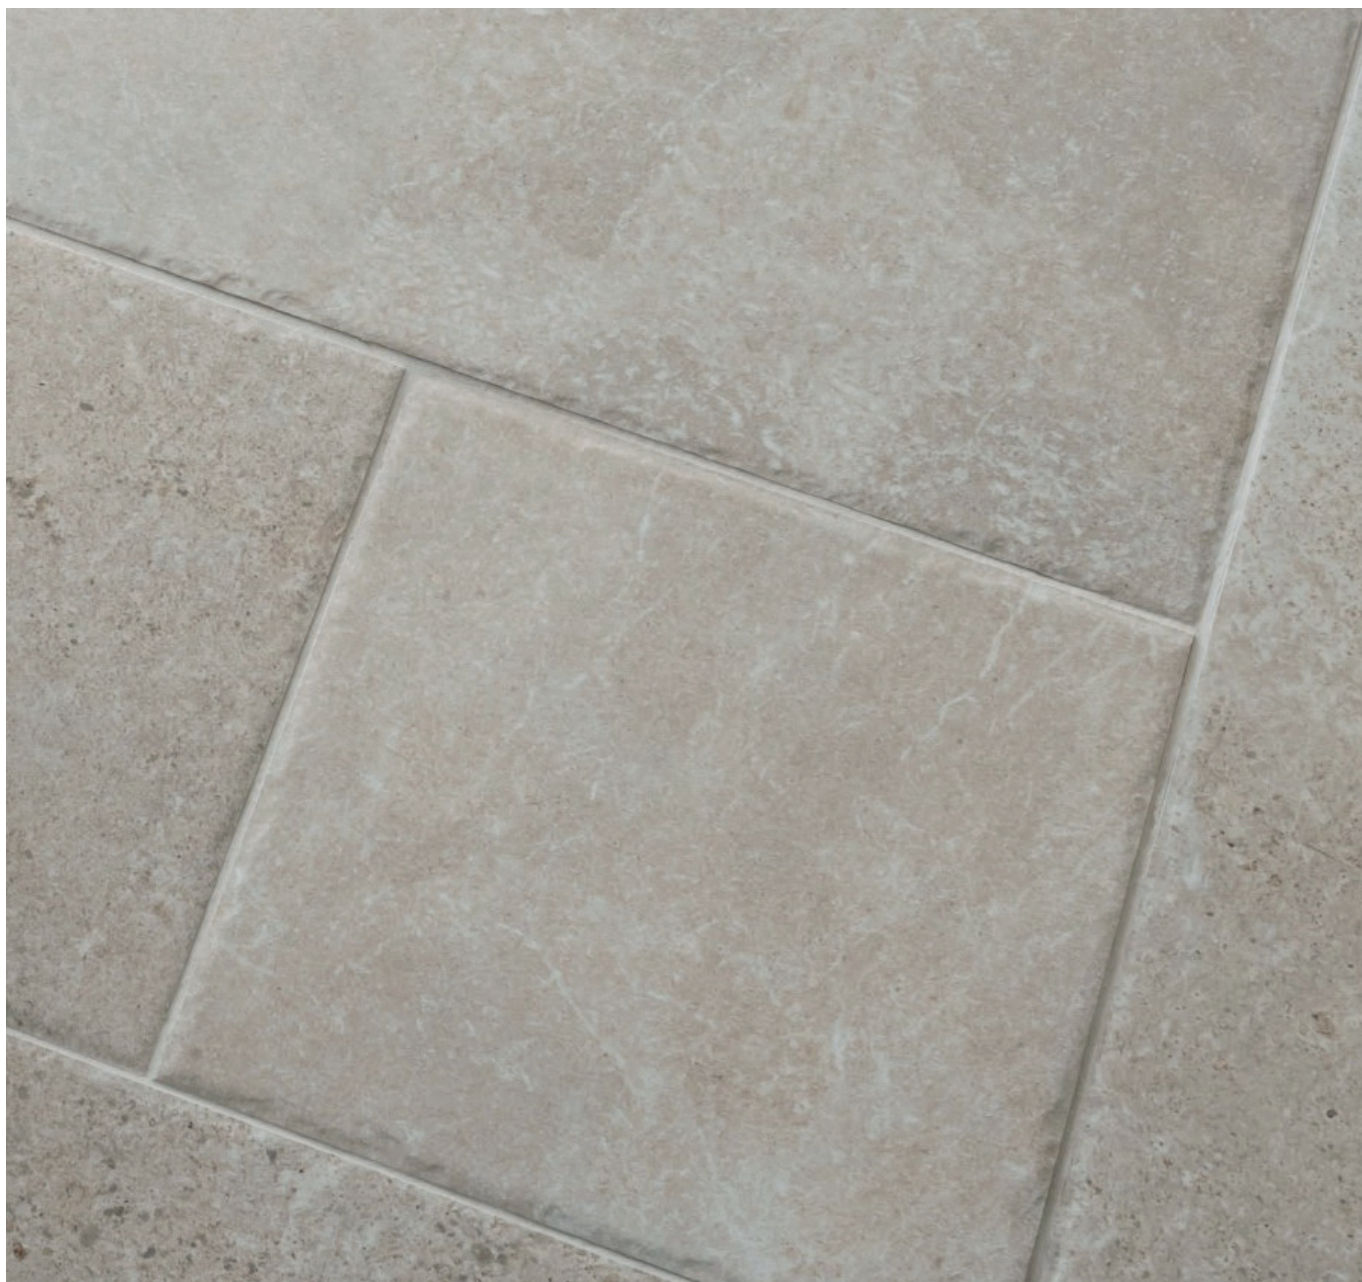

Hedgebury




Available sizes
447x672mm
447x447mm
447x222mm
222x222mm
0.9m ² coverage (modular)

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

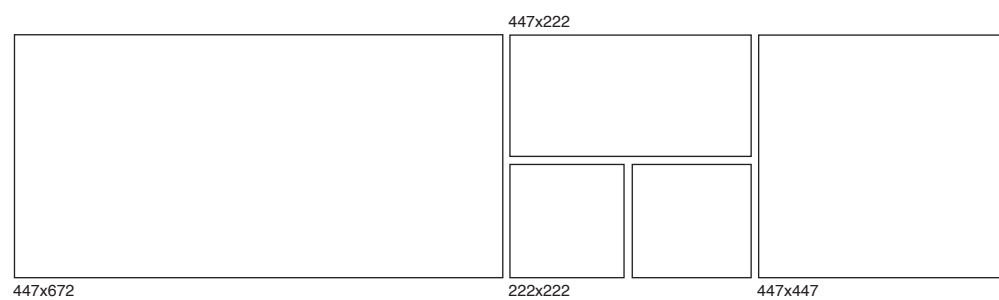

Dimensions	Multiple
Finish	Matt
Body	Porcelain
Wall/floor	Wall and floor
Group	BI _a
Pendulum Dry (4S)	36+
Pendulum Wet (4S)	36+
Pendulum Wet (TRL)	tbc
Recycled content	37%

	Standard	Requirement	Typical test value
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Pass
Thickness	ISO 10545-2	±5% ≤ ±0.5mm	Pass
Straightness	ISO 10545-2	±0.5% ≤ ±1.5mm	Pass
Flatness	ISO 10545-2	±0.5% ≤ ±2.0mm	Pass
Rectangularity	ISO 10545-2	±0.5% ≤ ±2.0mm	Pass
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Pass
Breaking strength	ISO 10545-4	≥ 1300N	Pass
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	Pass
Resistance to surface abrasion	ISO 10545-7	n/a	PEI 4
Frost resistance	ISO 10545-12	Complies with Standard	Pass
Thermal shock resistance	ISO 10545-9	Complies with Standard	Pass
Resistance to stain	ISO 10545-14	Min Class 3	Pass
Resistance to chemicals	ISO 10545-14	Min Class B	Pass
Reaction to fire	-	Floor/wall Class A1 A1/FL	Pass

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles