

# Hemington

3 COLOURS / 3 SIZES / 1 FINISHES / 0 SPECIAL PIECES

Hemington is a versatile, stone effect, porcelain tile range that gives you the natural look of stone without the maintenance. Available in three colours and two size options: 305x605mm and 605x605mm as well as a 300x300mm mosaic tile with geometric design and 610x150mm 3D mosaic. The 2D tiles have 40% recycled content and the 3D tiles have 30% recycled content.



Hemington



Hemington



# Hemington



CLIFF




PUTTY




GRAPHITE




CLIFF MOSIAC



PUTTY MOSIAC



GRAPHITE MOSIAC

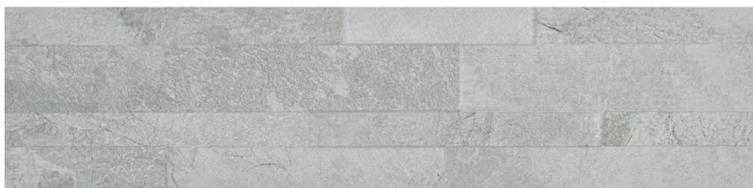

CLIFF 3D



PUTTY 3D



GRAPHITE 3D

---

## Available sizes

---

305x605mm

---

605x605mm

---

300x300mm mozaic

---

610x150mm 3D mozaic


---

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Hemington

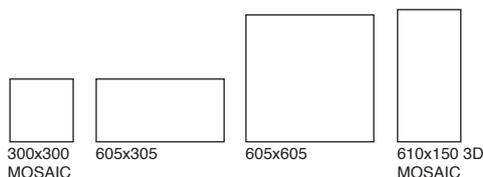

## GROUP / Bla - PORCELAIN

|   | Standard     | Requirement                          | Established values                          |
|---|--------------|--------------------------------------|---|
| Length and width  | ISO 10545-2  | $\pm 0.6\% \sim \pm 2\text{mm}$      | Conforms                                    |
| Thickness   | ISO 10545-2  | $\pm 5\% \sim \pm 0.5\text{mm}$      | Conforms                                    |
| Straightness  | ISO 10545-2  | $\pm 0.5\% \sim \pm 1.5\text{mm}$    | Conforms                                    |
| Flatness  | ISO 10545-2  | $\pm 0.5\% \sim \pm 2.0\text{mm}$    | Conforms                                    |
| Rectangularity  | ISO 10545-2  | $\pm 0.5\% \sim \pm 2.0\text{mm}$    | Conforms                                    |
| Water absorption  | ISO 10545-3  | $E_b \leq 0.5\%$                     | $\leq 0.5\%$                                |
| Breaking strength   | ISO 10545-4  | $\geq 1300\text{N}$                  | Ave $\geq 1500\text{N}$                     |
| Modulus of rupture  | ISO 10545-4  | Ave Minimum $\geq 35 \text{ N/mm}^2$ | Ave $\geq \text{min } 42 \text{ N/mm}^2$    |
| Resistance to surface abrasion                            | ISO 10545-7  | Declare Class                        | Putty and Graphite – PEI 5<br>Cliff – PEI 4 |
| Thermal shock resistance                                  | ISO 10545-9  | Pass according to EN ISO 10545-1     | Resistant                                   |
| Frost resistance  | ISO 10545-12 | Pass according to EN ISO 10545-1     | Resistant                                   |
| Resistance to household chemicals and swimming pool salts | ISO 10545-13 | Min Class GB                         | GA  |
| Resistance to high concentrations of alkalis and acids    | ISO 10545-13 | Declare Value                        | GHA   |
| Resistance to low concentrations of alkalis and acids     | ISO 10545-13 | Declare Value                        | GLA   |
| Resistance to stain                                       | ISO 10545-14 | Declare Value                        | Class 5                                     |
| Reaction to fire  | -            | Class A1 A1/FL                       | A1 A1/FL                                    |

| Recycled content | %  |
|------------------|----|
| 2D tiles         | 40 |
| 3D tiles         | 30 |

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles