

Hopper

3 COLOURS / 4 SIZES / 2 FINISHES / 0 SPECIAL PIECES

Out of nostalgia for terrazzo and passion for the Mediterranean comes this collection of peaceful and quiet colours that seeks to capture the emotion of the sea through sand and seashells. A concept that shows us how to conceive new materials linked to the nature of the environment, aesthetics in balance and timelessness. Available in various sizes including mosaics, the natural finish of Fragments brings a stylish and calming feel to any space.



Hopper





Hopper



WHITE MATT




WHITE SEMI POLISHED




GREY MATT



GREY SEMI POLISHED



BLACK MATT



BLACK SEMI POLISHED


Porcelain	10.5mm thick	Wall/floor	Wall/floor
	Matt	Semi polished	All tiles
300x600	✓	✓	Wall and floor
600x600	✓	✓	Wall and floor
600x1200	✓	✓	Wall and floor
1200x1200	✓	✓	Wall and floor

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Hopper

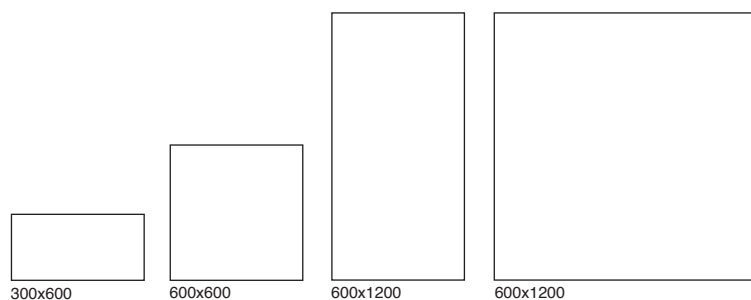

GROUP / Bla - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave $\leq 0.1\%$
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	Ave 6500N
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	Ave min 45 N/mm ²
Resistance to deep abrasion	ISO 10545-6	$\leq 175\text{mm}^2$	Ave $\leq 140\text{mm}^2$
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	UHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULB
Resistance to stain	ISO 10545-14	Declare Value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles