


Hound

4 COLOURS / 6 SIZES / 1 FINISH / 2 SPECIAL PIECES


Hound is a collection of four muted earth colour; each colour contains 40 different shaded tiles. Hound is rated PTV 36+ shod foot in Olive, Dark Grey, Light Grey and Ivory. This range has 15% recycled content.

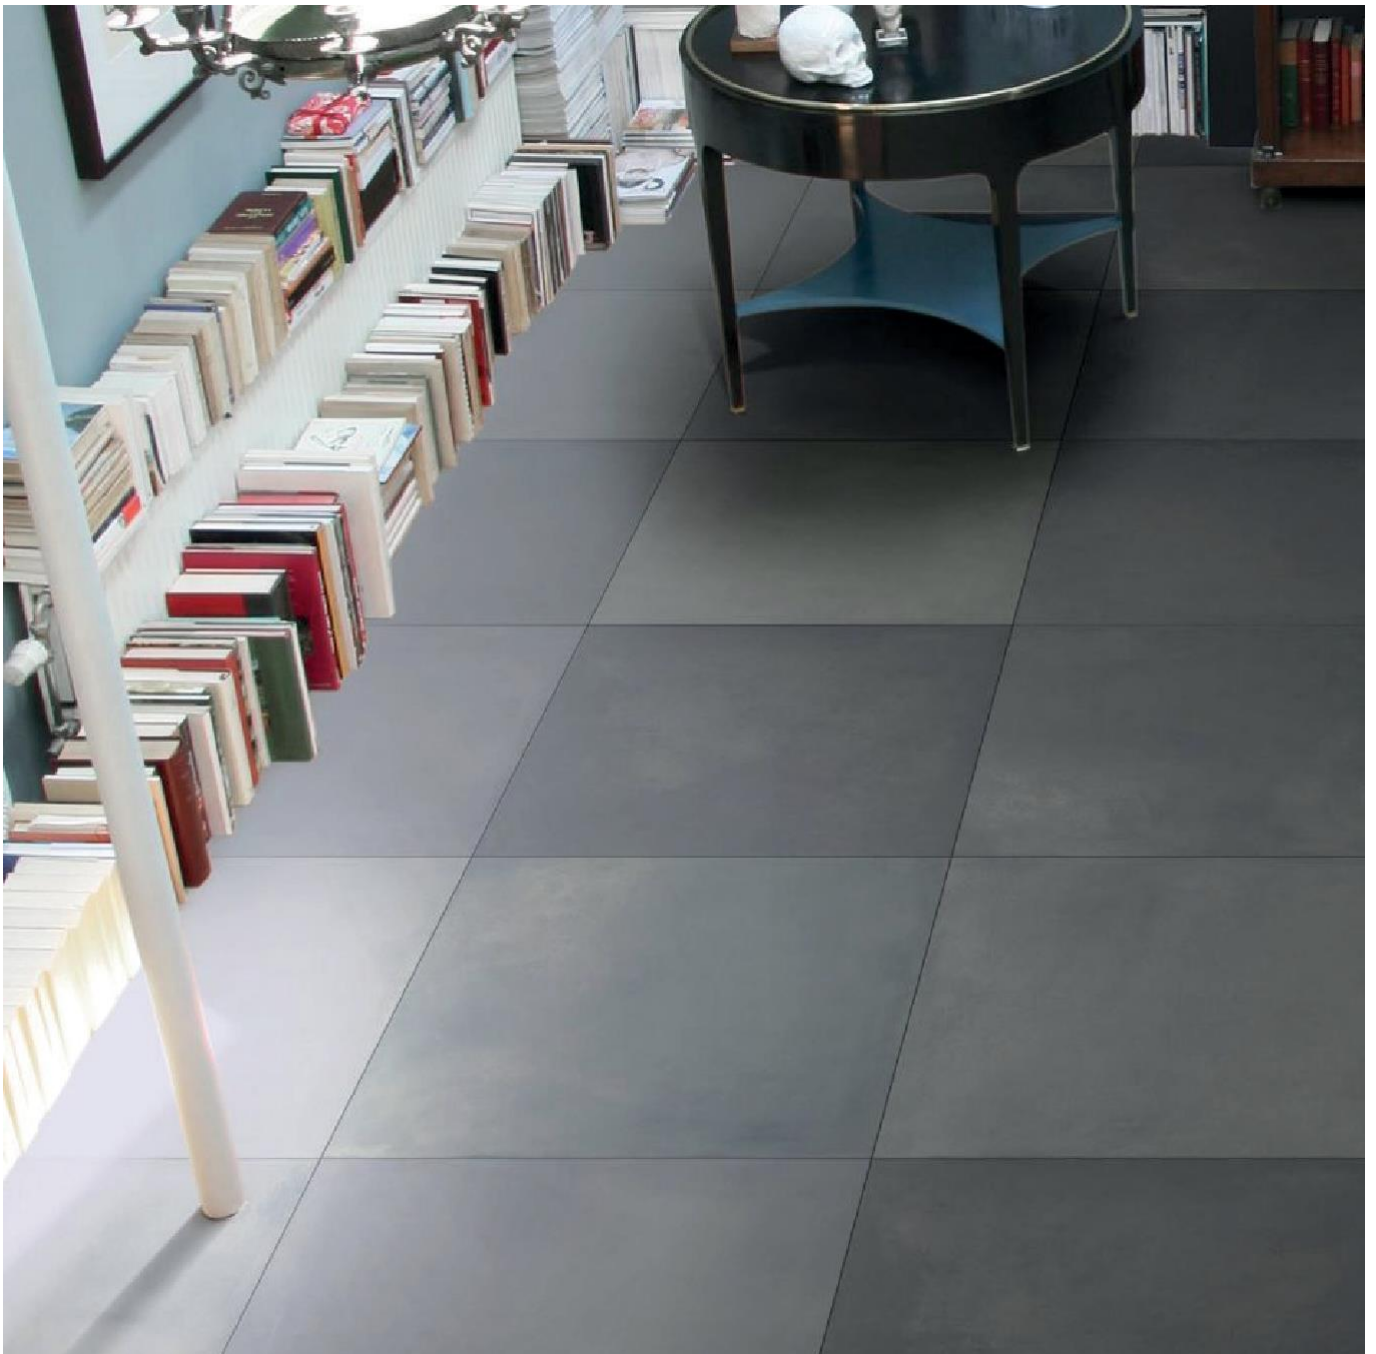

Hound



Hound



IVORY




LIGHT GREY



DARK GREY



OLIVE

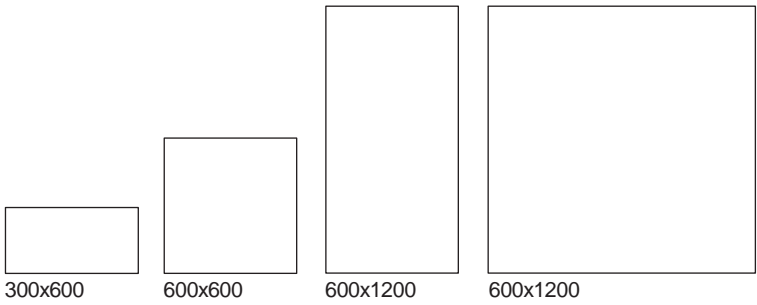

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Hound

GROUP / Bla - PORCELAIN

| | Standard | Requirement | Established values |
|---|--------------|-----------------------------------|---|
| Length and width | ISO 10545-2 | $\pm 0.6\% \sim \pm 2\text{mm}$ | Conforms |
| Thickness | ISO 10545-2 | $\pm 5\% \sim \pm 0.5\text{mm}$ | Conforms |
| Straightness | ISO 10545-2 | $\pm 0.5\% \sim \pm 1.5\text{mm}$ | Conforms |
| Flatness | ISO 10545-2 | $\pm 0.5\% \sim \pm 2.0\text{mm}$ | Conforms |
| Rectangularity | ISO 10545-2 | $\pm 0.5\% \sim \pm 2.0\text{mm}$ | Conforms |
| Water absorption | ISO 10545-3 | $E_b \leq 0.5\%$ | Ave $\leq 0.3\%$ |
| Breaking strength | ISO 10545-4 | $\geq 1300\text{N}$ | Ave 1300N |
| Modulus of rupture | ISO 10545-4 | Ave Minimum 35 N/mm ² | Ave 42 N/mm ² |
| Resistance to deep abrasion | ISO 10545-7 | Declare Class | Black Marble, Dark Grey & Olive – PEI 4 White Marble, Ivory & Grey – PEI 5 |
| Thermal shock resistance | ISO 10545-9 | Pass according to EN ISO 10545-1 | Resistant |
| Frost resistance | ISO 10545-12 | Pass according to EN ISO 10545-1 | Resistant |
| Resistance to household chemicals and swimming pool salts | ISO 10545-13 | Min Class GB | GA |
| Resistance to high concentrations of alkalis and acids | ISO 10545-13 | Declare Value | GHA |
| Resistance to low concentrations of alkalis and acids | ISO 10545-13 | Declare Value | GLA |
| Resistance to stain | ISO 10545-14 | Declare Value | Class 5 |
| Reaction to fire | - | Class A1 A1/FL | A1 A1/FL |

| Slip resistance characteristics | Pendulum Dry (4S Slider 96) +36 PTV | Pendulum Wet (4S Slider 96) +36 PTV |
|--|---|---|
| Ivory, Light grey, Dark grey and Olive | ✓ | ✓ |

| Recycled content | % |
|------------------|----|
| Hound | 15 |

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles