

Jacuro

3 COLOURS / **10** SIZES / **3** FINISHES / **0** SPECIAL PIECES

The Jacuro collection is versatile and modern, due to its timeless colour range. The origin of this stone is in fossilised matter. Each tone has been carefully worked to present a harmonic, functional and aesthetic product. This collection is ideal for both indoor and outdoor spaces thanks to its natural and slip resistant finishes.



Jacuro



Jacuro



Jacuro



LIGHT



BEIGE



GREY


Porcelain				Wall/floor	Interior/exterior
	Matt	Soft	Anti-slip	All tiles	All tiles
150x150	✓		✓	Wall and floor	Interior
150x600	✓		✓	Wall and floor	Interior
150x900	✓		✓	Wall and floor	Interior
300x300	✓		✓	Wall and floor	Interior
300x600	✓		✓	Wall and floor	Interior
450x900	✓		✓	Wall and floor	Interior
600x600	✓		✓	Wall and floor	Interior
900x900	✓		✓	Wall and floor	Interior
1200x1200		✓		Wall and floor	Interior
1200x2600		✓		Wall and floor	Interior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Jacuro

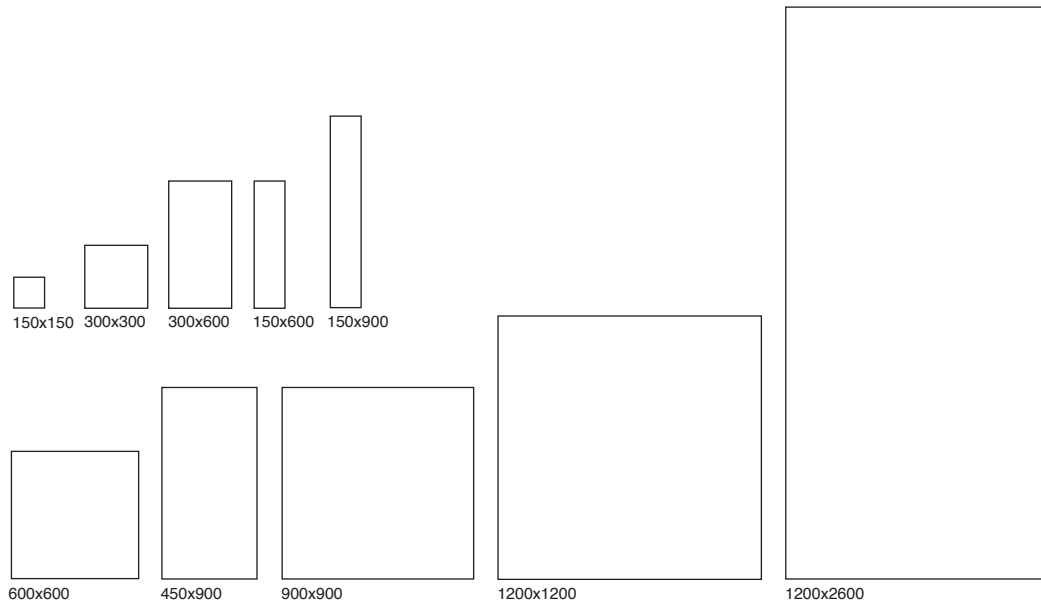

GROUP / Bla - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave $\leq 0.3\%$
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	Ave $\geq 2000\text{N}$
Modulus of rupture	ISO 10545-4	Ave min 35 N/mm^2	Ave 40 N/mm^2
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	Declare Class	Ave 140mm^2
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	UHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULB
Resistance to stain	ISO 10545-14	Declare Value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Slip resistance characteristics	Pendulum Dry (4S Slider 96) +36 PTV	Pendulum Wet (4S Slider 96) +36 PTV	Pendulum Wet (TRL Slider 55) +36 PTV
Anti-slip finish	✓	✓	✓

Recycled content	%
Jacuro	33

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles