


# Lapari

1 COLOURS / 2 SIZES / 1 FINISHES / 0 SPECIAL PIECES

Lapari is famed for its beautiful white marble, it's marble effect offers a sleek design for a minimalist, modern look. A matt finish porcelain, Lapari gives you the stunning opulence of white marble, with a contemporary feel. Available in 1 colour, 2 sizes and 1 finish. This range has 36% recycled content.



# Lapari

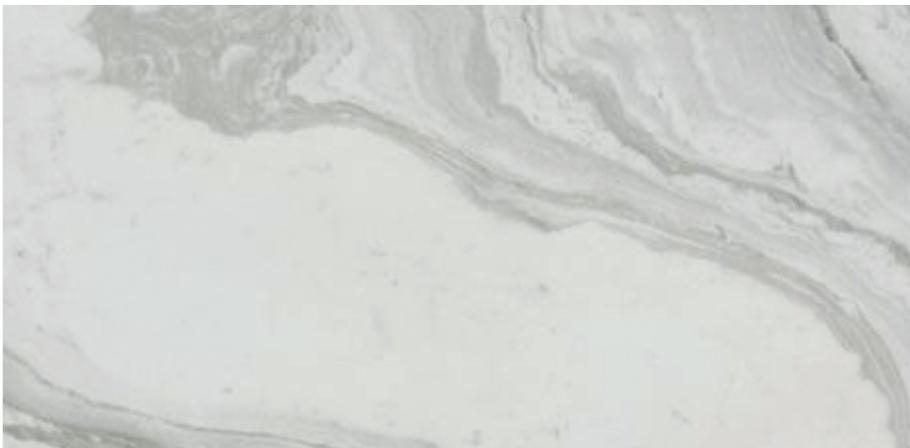


## VARIATIONS

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Lapari



Dimensions	Multiple
Finish	Matt
Body	Porcelain
Wall/floor	Wall and floor
Interior/exterior	Interior
Group	Bia
Pendulum Dry (4S)	36+
Pendulum Wet (4S)	0-24
Pendulum Wet (TRL)	0-24

## GROUP / Bia PORCELAIN

Range	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Pass
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Pass
Straightness	ISO 10545-2	$\pm 0.3\% \sim \pm 1.5\text{mm}$	Pass
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Pass
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Pass
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Pass
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	Pass
Modulus of rupture	ISO 10545-4	35 N/mm <sup>2</sup> Average min	Pass
Resistance to surface abrasion	ISO 10545-7	n/a	PEI 4
Frost resistance	ISO 10545-12	Complies with Standard	Pass
Thermal shock resistance	ISO 10545-9	Complies with Standard	Pass
Resistance to stain	ISO 10545-14	Min Class 3	Pass
Resistance to chemicals	ISO 10545-14	Min Class B	Pass
Reaction to fire	-	Floor/wall Class A1 A1/FL	Pass

Recycled content	%
Lapari	36

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles