

Lome

5 COLOURS / 1 SIZES / 1 FINISHES / 0 SPECIAL PIECES

Drawing inspiration from traditional hand-painted terracotta tiles, the Lome tiles use the latest inkjet technology to replicate a handmade, hand decorated piece, with uneven edges and an aged appearance. Combine the different patterns to create a unique design that can be used on the wall or floor. This range contains 70% recycled content.



Lome



Lome




Lome



BEIGE



BLANCO

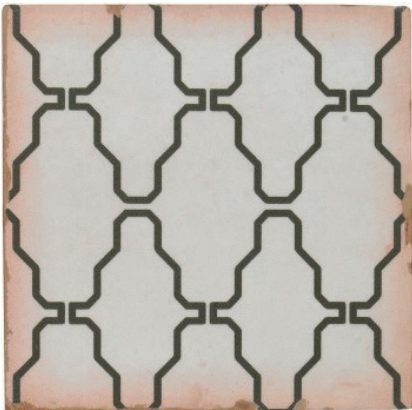

OCRE



OCRE



OCRE

Available sizes
125x125x8mm

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles



125x125

Dimensions	125x125x8mm
Finish	Matt
Body	Ceramic
Wall/floor	Wall and floor
Group	BI _b
Pendulum Dry	55
Pendulum Wet	10

	Standard	Requirement	Typical test value
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Pass
Thickness	ISO 10545-2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass
Straightness	ISO 10545-2	$\pm 5\% \leq \pm 1.5\text{mm}$	Pass
Flatness	ISO 10545-2	$\pm 0.5\% \leq \pm 2.0\text{mm}$	Pass
Rectangularity	ISO 10545-2	$\pm 0.5\% \leq \pm 2.0\text{mm}$	Pass
Water absorption	ISO 10545-3	$0.5\% E_b \geq 3\%$	Pass
Breaking strength	ISO 10545-4	$\geq 1100\text{N}$	Pass
Modulus of rupture	ISO 10545-4	30 N/mm ² Average min 27 N/mm ² Individual min	Pass
Resistance to surface abrasion	ISO 10545-7	Complies with Standard	Class 3
Frost resistance	ISO 10545-12	Complies with Standard	Resistant
Thermal shock resistance	ISO 10545-9	Complies with Standard	Pass
Resistance to stain	ISO 10545-14	Min Class 3	Pass
Resistance to chemicals	ISO 10545-14	Min Class B	Pass
Reaction to fire	-	Floor/wall Class A1 A1/FL	Pass

Recycled content	%
Lome	70

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles