

Lyrical

10 COLOURS / 2 SIZES / 1 FINISHES / 0 SPECIAL PIECES

Lyrical is a striking ceramic wall tile collection inspired by traditional zellige tiles. Available in 65x200mm and 132x132mm and ten striking colours, each featuring natural colour variation and a beautiful gloss finish.



Lyrical



Lyrical




Lyrical




WHITE




OCRE



GOLD



BURGUNDY




MOSS GREEN



AQUA



ALABASTER



GRAPHITE



COLONIAL BLUE




ROSE




WHITE




OCRE



GOLD



BURGUNDY




MOSS GREEN




AQUA



ALABASTER



GRAPHITE




COLONIAL BLUE



ROSE

Available sizes
125x125x8mm

Lyrical

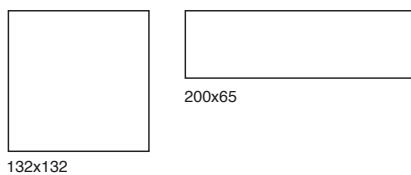

Dimensions	Multiple
Finish	Glazed
Body	Ceramic
Wall/floor	Wall
Group	BIII
Pendulum Dry (4S)	-
Pendulum Wet (4S)	-
Pendulum Wet (TRL)	

	Standard	Requirement	Typical test value
Length and width	ISO 10545-2	$\pm 0.5\% \sim \pm 2\text{mm}$	Pass
Thickness	ISO 10545-2	$\pm 10\% \leq \pm 0.5\text{mm}$	Pass
Straightness	ISO 10545-2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	NPD
Flatness	ISO 10545-2	$\pm 0.5\% \leq \pm 2.0\text{mm}$	Pass
Rectangularity	ISO 10545-2	$\pm 0.5\% \leq \pm 2.0\text{mm}$	NPD
Water absorption	ISO 10545-3	$E_b > 10\%$	Pass
Breaking strength	ISO 10545-4	$\geq 600\text{N}$	Pass
Modulus of rupture	ISO 10545-4	12 N/mm ² Average min	Pass
Resistance to surface abrasion	ISO 10545-7	n/a	NPD
Frost resistance	ISO 10545-12	Complies with Standard	NPD
Thermal shock resistance	ISO 10545-9	Complies with Standard	Pass
Resistance to stain	ISO 10545-14	Min Class 3	NPD
Resistance to chemicals	ISO 10545-14	Min Class B	NPD
Reaction to fire	-	Floor/wall Class A1 A1/FL	Pass

Recycled content	%
Lyrical	0

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles