

Marsett

2 COLOURS / **1** SIZES / **1** FINISHES / **0** SPECIAL PIECES

The Marsett ceramic tile range fits in with the neutral trend. The linear, structured surface of the decor tiles add a contemporary feel to the collection. Simply mix both the plain and decor tiles to create a sophisticated look on your next project.



Marsett




SAND



GREY



SAND DECOR

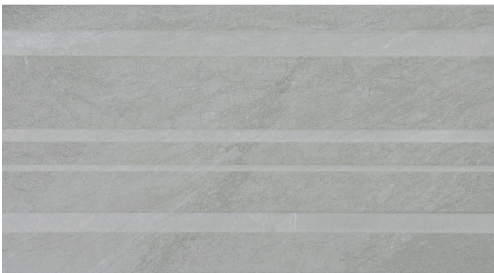

GREY DECOR

Ceramic	10mm thick		Wall/floor	Interior/exterior
	Matt	Gloss	All tiles	All tiles
500x250	✓		Wall	Interior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles



1500x750

GROUP / BIII - CERAMIC

	Standard	Requirement	Typical test value
Length and width	ISO 10545-2	$\pm 0.5\% \sim \pm 2\text{mm}$	Pass
Thickness	ISO 10545-2	$\pm 10\% \leq \pm 0.5\text{mm}$	Pass
Straightness	ISO 10545-2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	Pass
Flatness	ISO 10545-2	$\pm 0.5\% \leq \pm 2.0\text{mm}$	Pass
Rectangularity	ISO 10545-2	$\pm 0.5\% \leq \pm 2.0\text{mm}$	Pass
Water absorption	ISO 10545-3	$E_b \leq 10\%$	Pass
Breaking strength	ISO 10545-4	$\geq 600\text{N}$	Pass
Modulus of rupture	ISO 10545-4	Ave Minimum 12 N/mm ²	Pass
Resistance to surface abrasion	ISO 10545-7	n/a	NPD
Frost resistance	ISO 10545-12	n/a	NPD
Thermal shock resistance	ISO 10545-9	n/a	NPD
Resistance to stain	ISO 10545-14	Min Class 3	Pass
Resistance to chemicals	ISO 10545-14	Min Class B	Pass
Reaction to fire	-	Floor/wall Class A1 A1/FL	Pass

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles