

Mews

6 COLOURS / 4 SIZES / 1 FINISHES / 0 SPECIAL PIECES

Designed by Edward Barber and Jay Osgerby for Mutina, Mews was inspired by the landscape, history and personality of London and the huge variety of textures present in the infrastructure there: bricks, wooden floors and irregular geometric patterns. The collection consists of 6 base colours: chalk, fog, pigeon, lead, ink and soot, each of which contains a palette of 15 different shades. This wide colour range adds depth and movement to the tiled surface making it rich and remarkable.



Mews





Mews




CHALK




FOG




PIDGEON



LEAD



INK



SOOT

Available sizes

55x196 Chevron

55x394 Chevron


55x450

110x110

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

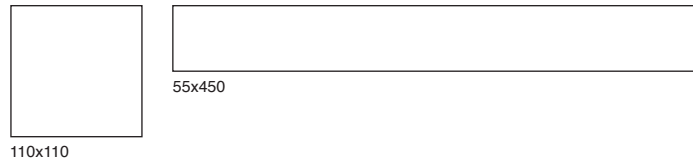

GROUP / Bla - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	0.04%
Breaking strength	ISO 10545-4	$\geq 1300N$	-
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	-
Resistance to surface abrasion	ISO 10545-7	Declare Class	-
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	-
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	-
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	-
Resistance to stain	ISO 10545-14	Declare Value	-
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled content	%
Mews	13.8 -15.3

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles