

Opale

4 COLOURS / 5 SIZES / 1 FINISHES / 27 SPECIAL PIECES

A glossy finish and intentionally irregular surfaces evoke the sensations of handmade products. Three modular sizes - 150x150, 50x150 and 75x200 mm – with straight edges to enable spaceless installation. A neutral palette - Bianco, Natural and Grigio - with hints of Blu combine with three motifs inspired by nature, creating multiple compositions with a unique character. Panel of 600x900 composed of 2, 450x600 modules - A and B. Each module is made up of 12 pieces of decorated 150x150 tiles (Garden Decor).





Opale




Opale



BIANCO



BLU




GRIGIO



NATURAL



BIANCO DECO BLOSSOM



BLU DECO BLOSSOM




GRIGIO DECO BLOSSOM



NATURAL DECO BLOSSOM



BIANCO DECO LEAF



BLU DECO LEAF



GRIGIO DECO LEAF



NATURAL DECO LEAF



BIANCO STRUT PLEAT



BLU STRUT PLEAT



GRIGIO STRUT PLEAT



NATURAL STRUT PLEAT



GARDEN DECOR A




GARDEN DECOR B

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Opale

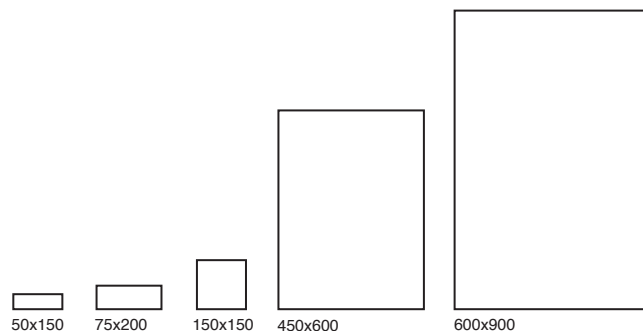

GROUP / Bla PORCELAIN

Range	Standard	Requirement	Typical test value
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave $\leq 0.5\%$
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	Ave 1300N
Modulus of rupture	ISO 10545-4	35 N/mm ² Average min	35 N/mm ² Average min
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare value	GLB
Resistance to stain	ISO 10545-14	Min Class 3	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Grout and trim available

Opale	Grout	Trim

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles