

# Parlato

6 COLOURS / 5 SIZES / 3 FINISHES / 0 SPECIAL PIECES

The Parlato collection combines the elegance of 7 marbles translated into stoneware: glossy and matt surfaces combined with an irresistible contemporary appeal accentuated by the size of the slabs, including the new 6mm-thick 1600x3200mm. Altissimo, Golden White, Calacatta Extra and Saint Laurent are also available in a satin finish.



Parlato



ALTISSIMO

Parlato



IMPERIALE

Parlato



ALTISSIMO

Parlato



CAPRAIA

Parlato




CALACATTA EXTRA

Parlato



SAINT LAURENT

# Parlato

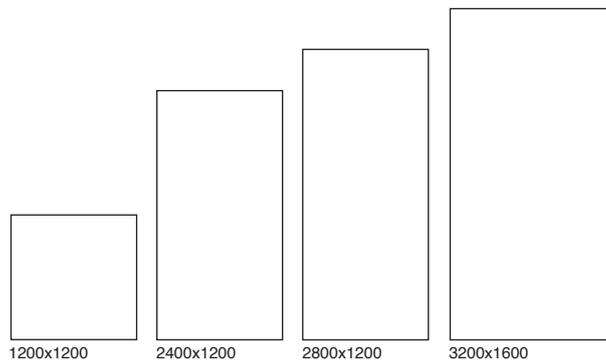

Porcelain	6mm thick			Wall/floor	Interior/exterior
	Matt	Lux	Satin	All tiles	All tiles
1200X1200	✓	✓		Wall and floor	Interior and exterior
1200X2400	✓	✓		Wall and floor	Interior and exterior
1200X2780		✓	✓	Wall and floor	Interior and exterior
1600X3200	✓	✓		Wall and floor	Interior and exterior

## GROUP / BLA - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	$\leq 0.5\%$
Breaking strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	Ave 35 N/mm <sup>2</sup>
Resistance to surface abrasion (unglazed tiles)	ISO 10545-6	$\leq 175mm^2$	Ave $\leq 150mm^2$
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	UHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULB
Resistance to stain	ISO 10545-14	Declare Value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles