


Pulp

5 COLOURS / 5 SIZES / 3 FINISHES / 2 SPECIAL PIECES

Pulp is a collection of a rich, bold, graphic and coloured marble effect tiles. The starting point is an Arabescato marble, realised in 5 different colours -black, gold, red, green, blue. Through these 5 chromatic variations, the material becomes strong, dynamic and surreal.




Pulp

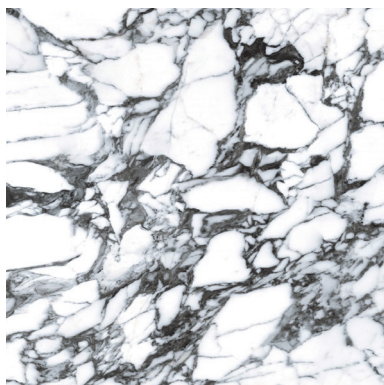

BLACK

Pulp

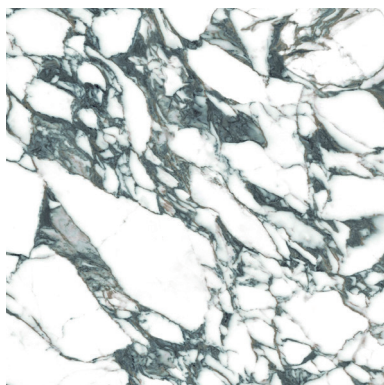


GREEN

Pulp




GOLD

Pulp

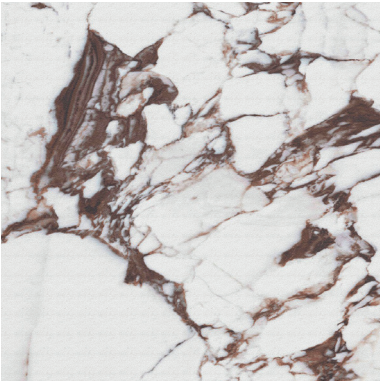

RED


Pulp

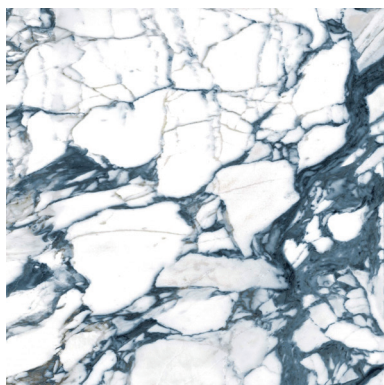

BLUE



600x1200



75x1200 SKIRTING



100x600



75x600



300X300
MOSAIC

Porcelain	10mm thick			Wall/floor	Interior/exterior
	Matt	Polished	Raw	All tiles	All tiles
600X1200	✓	✓	✓	Wall and floor	Interior and exterior
100X600	✓	✓	✓	Wall and floor	Interior and exterior
75X600		✓		Wall and floor	Interior and exterior
300x300 Mosaic	✓	✓	✓	Wall and floor	Interior and exterior
75x1200 Skirting	✓	✓	✓	Wall and floor	Interior and exterior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Pulp

GROUP / BLa - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave 0.2%
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	$\geq 1300\text{N}$
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	Ave 45 N/mm ²
Resistance to surface abrasion	ISO 10545-7	Declare Class	PEI 4
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to stain	ISO 10545-14	Declare Value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Slip resistance characteristics	Pendulum Dry (4S Slider 96 +36 PTV	Pendulum Wet (4S Slider 96 +36 PTV
Raw finish	✓	✓

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles