

# Randall

4 COLOURS / 7 SIZES / 1 FINISHES / 27 SPECIAL PIECES

A stone effect collection comprising four warm shades, structured to emphasise the natural material's surface, Randall is available in seven standard sizes.



Randall



Randall



# Randall



BIANCO



SABBIA



MOKA



GRIGIO



CREAM TEXTURED



CLAY MATT



CLAY GRIP



CLAY TEXTURED



TAUPE MATT



TAUPE GRIP



TAUPE TEXTURED


The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles



# Randall

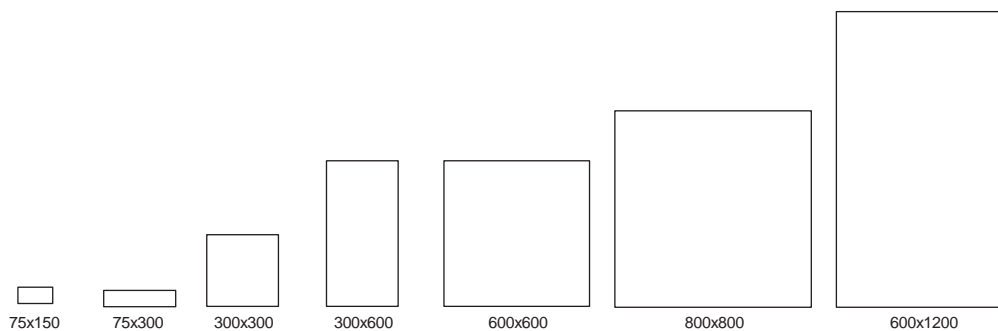

PORCELAIN	10mm thick	Wall/floor	Interior/exterior
	Matt	All tiles	All tiles
75x150	✓	Wall and floor	Interior and exterior
75x300	✓	Wall and floor	Interior and exterior
300x300	✓	Wall and floor	Interior and exterior
300x600	✓	Wall and floor	Interior and exterior
600x600	✓	Wall and floor	Interior and exterior
600x1200	✓	Wall and floor	Interior and exterior
800x800	✓	Wall and floor	Interior and exterior

PORCELAIN DÉCOR	Décor Type	10mm thick	Wall/floor	Interior/exterior
		Matt	All tiles	All tiles
75X300	Losanga	✓	Wall/floor	Interior and exterior
220X193	Esagona	✓	Wall/floor	Interior and exterior
300X300	Mosaico Esagona	✓	Wall/floor	Interior and exterior
300X300	Mosaico 5x5	✓	Wall/floor	Interior and exterior
300X300	Tartan	✓	Wall/floor	Interior and exterior
300X600	Intarsio, Intarsio 3D	✓	Wall/floor	Interior and exterior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Randall

## GROUP / Bla - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	$\leq 0.5\%$
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	Ave 2000N
Modulus of rupture	ISO 10545-4	Ave min 35 N/mm <sup>2</sup>	Ave 50 N/mm <sup>2</sup>
Resistance to deep abrasion	ISO 10545-7	Declare Class	Bianco – PEI 5, Sabbia, Grigio – PEI 4 & Moka – PEI 3
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to stain	ISO 10545-14	Declare Value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled content	%
Randall	10-19

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles