

Renata

6 COLOURS / 6 SIZES / 1 FINISHES / 0 SPECIAL PIECES

Renata is a stone effect, extruded porcelain collection which comes in six colours and an abundance of matching geometric patterns. The six plain colours are available in 110x110mm, 110x225mm, 70x450mm, 225x450mm and 180x205mm hexagon. This range contains 0% recycled content.



Renata



Renata



Renata



RICE



SAND




MOSS



ATLANTIC



FOSSIL



CAVIAR




RICE INCLINE




RICE MOTIF




SAND PATTERN



MOSS OLD



ATLANTIC LINES



ATLANTIC TANGRAM



ATLANTIC OLD



ATLANTIC ROADS



CAVIAR LINES



CAVIAR PATTERN




CAVIAR ROADS

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Renata

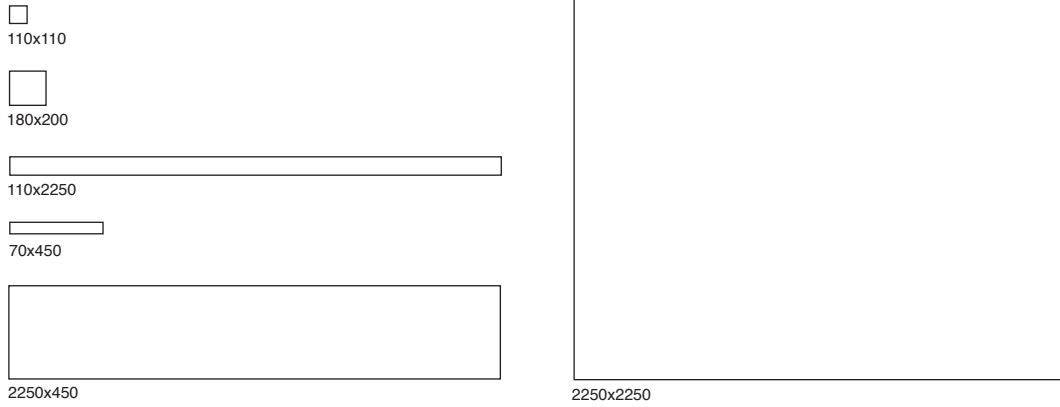

Porcelain	9.5mm thick	Wall/floor	Interior/exterior
	Gloss	All tiles	All tiles
110x110	✓	Wall and floor	Interior and exterior
110x2250			
70x450			
180x200			
2250x450			
2250x2250			

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Renata

GROUP / Bla - PORCELAIN

Range	Standard	Requirement	Established Values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave $\leq 0.2\%$
Breaking strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	Ave min 32 N/mm ²
Resistance to surface abrasion	ISO 10545-7	Declare Class	Caviar - PEI 1, Moss & Sand - PEI 3, Fossil, Atlantic - PEI 4 & Rice - PEI 5
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to stain	ISO 10545-14	Declare Value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Slip resistance characteristics	Pendulum Dry (4S Slider 96) +36 PTV	Pendulum Wet (4S Slider 96) +36 PTV
Full range	✓	

Recycled content	%
Renata	0

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles