


Royan

5 COLOURS / 4 SIZES / 2 FINISHES / 15 SPECIAL PIECES











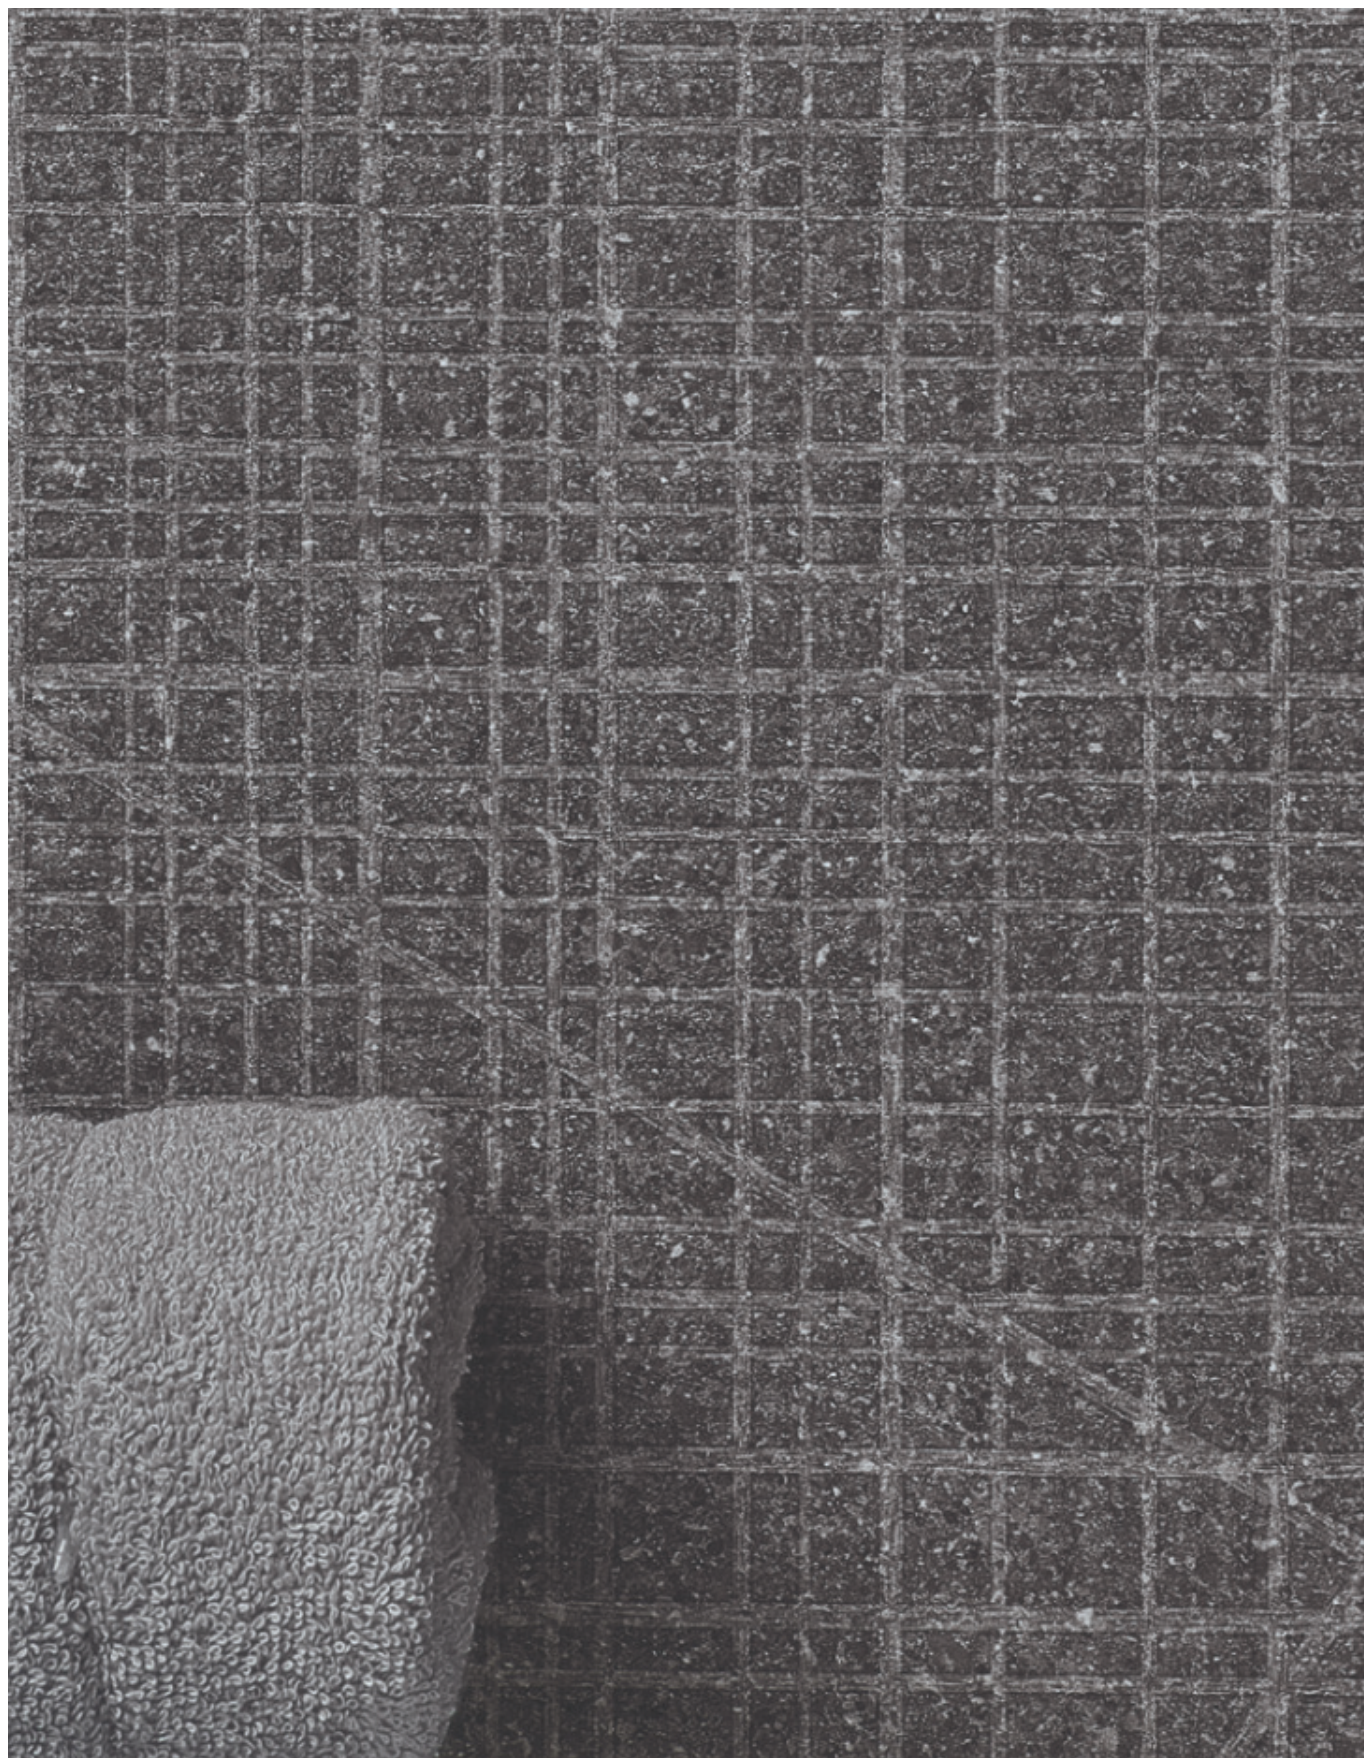









A collection of granite effect tiles inspired by the volcanic power of granite, Royan is available in two versions, fine-grained and rough-grained, both in slip-resistant and semi-polished finishes. There are also several mosaic additions.







Royan


| | | | |
|---|---|---|--|
|  |  |  |  |
| DARK FINE GRAIN SEMI POLISHED | GREY FINE GRAIN SEMI POLISHED | WHITE FINE GRAIN SEMI POLISHED | SAND FINE GRAIN SEMI POLISHED |
|  |  |  |  |
| DARK FINE GRAIN SEMI POLISHED | DARK FINE GRAIN SLIP RESISTANT | GREY FINE GRAIN SLIP RESISTANT | WHITE FINE GRAIN SLIP RESISTANT |
|  |  |  |  |
| SAND FINE GRAIN SLIP RESISTANT | TAUPE FINE GRAIN SLIP RESISTANT | DARK ROUGH GRAIN SEMI POLISHED | GREY ROUGH GRAIN SEMI POLISHED |
|  |  |  |  |
| WHITE ROUGH GRAIN SEMI POLISHED | SAND ROUGH GRAIN SEMI POLISHED | TAUPE ROUGH GRAIN SEMI POLISHED | DARK FINE GRAIN SLIP RESISTANT |
|  |  |  |  |
| GREY ROUGH GRAIN SLIP RESISTANT | WHITE ROUGH GRAIN SLIP RESISTANT | SAND ROUGH GRAIN SLIP RESISTANT | TAUPE ROUGH GRAIN SLIP RESISTANT |

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.


For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Royan




DARK CAGE



GREY CAGE



WHITE CAGE




SAND CAGE




TAUPE CAGE




WHITE MOSAIC MATT




SAND MOSAIC MATT



TAUPE MOSAIC MATT




GREY MOSAIC MATT




DARK MOSAIC MATT




WHITE MOSAIC LAPPATO




SAND MOSAIC LAPPATO



TAUPE MOSAIC LAPPATO



GREY MOSAIC LAPPATO



DARK MOSAIC LAPPATO

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Royan




WHITE BIG MOSAIC




SAND BIG MOSAIC



TAUPE BIG MOSAIC




GREY BIG MOSAIC




DARK BIG MOSAIC




WHITE SFALTI MOSAIC




SAND SFALTI MOSAIC



TAUPE SFALTI MOSAIC



GREY SFALTI MOSAIC




DARK SFALTI MOSAIC

| Porcelain | Fine grain 10mm thick | | | Rough grain 10mm thick | | | Mosaic 10mm thick | | Cage 10mm thick | | Wall/floor | Interior/exterior |
|-----------|-----------------------|---------------|------------|------------------------|---------------|------------|-------------------|---------------|-----------------|---------------|----------------|-----------------------|
| | Matt | Semi polished | Structured | Matt | Semi polished | Structured | Matt | Semi polished | Matt | Semi polished | All tiles | All tiles |
| 300x300 | | | | | | | ✓ | ✓ | | | Wall and floor | Interior and exterior |
| 300x600 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | | | Wall and floor | Interior and exterior |
| 900x900 | ✓ | ✓ | | ✓ | ✓ | | | | | | Wall and floor | Interior and exterior |
| 600x1200 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | | Wall and floor | Interior and exterior |

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

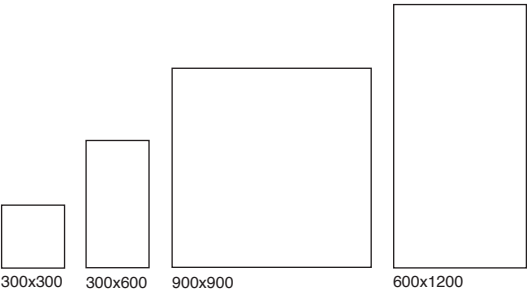

GROUP / Bla - CERAMIC

| Range | Standard | Requirement | Established Values |
|---|--------------|----------------------------------|------------------------------|
| Length and width | ISO 10545-2 | ±0.6% ~ ±2mm | Conforms |
| Thickness | ISO 10545-2 | ±10% ~ ±0.5mm | Conforms |
| Straightness | ISO 10545-2 | ±0.3% ~ ±1.5mm | Conforms |
| Flatness | ISO 10545-2 | ±0.5% ~ ±2.0mm | Conforms |
| Rectangularity | ISO 10545-2 | ±0.5% ~ ±2.0mm | Conforms |
| Water absorption | ISO 10545-3 | $E_b \leq 0.5\%$ | $\leq 0.5\%$ |
| Breaking strength | ISO 10545-4 | $\geq 1300N$ | Ave $\geq 2000N$ |
| Modulus of rupture | ISO 10545-4 | Ave Minimum 35 N/mm ² | Ave min 50 N/mm ² |
| Resistance to deep abrasion (unglazed tiles) | ISO 10545-6 | $< 175mm^3$ | Ave 150mm ² |
| Thermal shock resistance | ISO 10545-9 | Pass according to EN ISO 10545-1 | Resistant |
| Frost resistance | ISO 10545-12 | Pass according to EN ISO 10545-1 | Resistant |
| Resistance to household chemicals and swimming pool salts | ISO 10545-13 | Min Class UB | UB |
| Resistance to high concentrations of alkalis and acids | ISO 10545-13 | Declare Value | UHA |
| Resistance to low concentrations of alkalis and acids | ISO 10545-13 | Declare Value | ULA |
| Resistance to stain | ISO 10545-14 | Declare Value | Class 5 |
| Reaction to fire | - | Class A1 A1/FL | A1 A1/FL |

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles