

Sensi

5 COLOURS / 6 SIZES / 2 FINISHES / 0 SPECIAL PIECES

Inspired by the different textures of earth, the stone effect Sensi range has been designed by Italian architect and designer Matteo Thun. Available in five neutral shades, the collection remind us of the strength of nature. Developed with close attention to environmental impact, Sensi uses recycled content and sustainable production processes with self-generated electricity and water recycling.



Sensi



Sensi



Sensi



WHITE LITHOS



WHITE FOSSIL



IVORY LITHOS



IVORY FOSSIL



GREY LITHOS



GREY FOSSIL



TAUPE LITHOS




TAUPE FOSSIL




BROWN LITHOS



BROWN FOSSIL



BROWN DUST



BROWN SAND



TAUPE DUST



TAUPE SAND



GREY DUST



GREY SAND



IVORY DUST



IVORY SAND



WHITE DUST




WHITE SAND

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

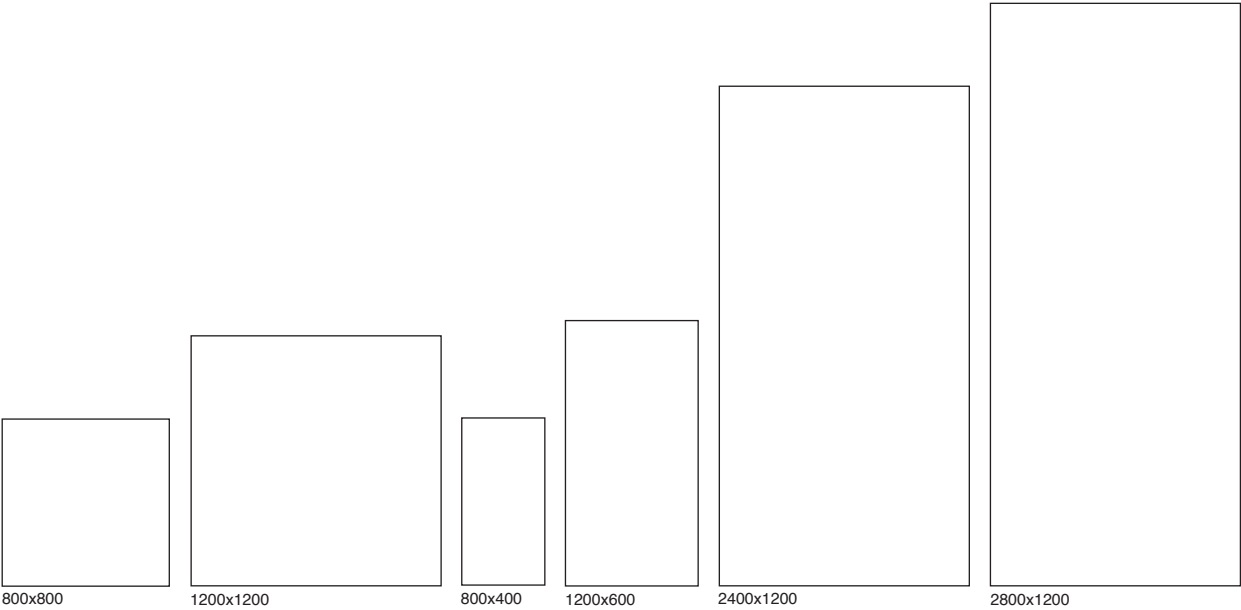

Porcelain	10mm thick				6mm thick			
	Dust - Matt	Sand - Matt	Lithos - Bush hammer	Fossil - Matt	Dust - Matt	Sand - Matt	Lithos - Bush hammer	Fossil - Matt
600x1200	✓	✓	✓	✓	✓	✓	✓	✓
800x800	✓	✓	✓	✓				
400x800	✓	✓	✓	✓				
1200x1200					✓	✓	✓	✓
1200x2400					✓	✓	✓	✓
1200x2800					✓		✓	✓

Porcelain	20mm thick	Wall/floor	Interior/exterior
	Sand - Structured	All tiles	All tiles
600x1200	✓	Wall and floor	Interior & exterior
800x800		Wall and floor	Interior & exterior
400x800		Wall and floor	Interior & exterior
1200x1200		Wall and floor	Interior & exterior
1200x2400		Wall and floor	Interior & exterior
1200x2800		Wall and floor	Interior & exterior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Range	Standard	Requirement	Established Values
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave 0.08%
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	14000N
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	Ave 52 N/mm ²
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	$< 175\text{mm}^3$	Ave 140mm ³
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULA
Resistance to stain	ISO 10545-14	Declare Value	Class 4
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Range	Standard	Requirement	Established Values
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave 0.08%
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	14000N
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	Ave 52 N/mm ²
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	$< 175\text{mm}^3$	Ave 140mm ³
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULA
Resistance to stain	ISO 10545-14	Declare Value	Class 4
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Range	Standard	Requirement	Established Values
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave 0.08%
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	$\geq 1350\text{N}$
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	Ave 52 N/mm ²
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	$< 175\text{mm}^3$	Ave 140mm ³
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULA
Resistance to stain	ISO 10545-14	Declare Value	MATTE – Class 5 LITHOS & SAND – Class 4
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled content	%
10mm Brown and Grey	41.9
10mm Taupe	12.7
10mm Ivory and White	7.1
20mm options	12.5
6mm slabs	7.1

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles