Sampkin

3 COLOURS / 5 SIZES / 1 FINISHES / 0 SPECIAL PIECES


With a harmonious blend of white to light grey shades and dark grey veining, this real marble collection will stand the test of time. Try combining with other organic materials such as wood or metal for a natural aesthetic.







Sampkin

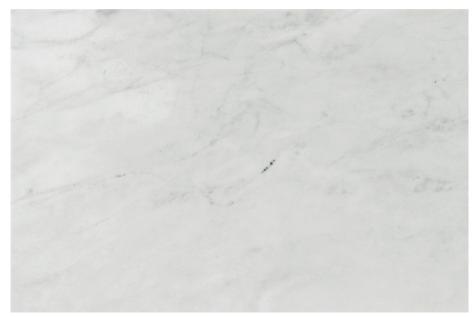

HONED




LINEA MOSAIC



HEXAGONAL MOSAIC

Sizes	
600x400x10mm	
600x300x10mm	
100x200x10mm	
100x300x10mm	
280x295x10mm	
0.06m ² (10mm depth) Hexagon	

Sampkin



Finish	Honed and polished
Body	Marble
Wall/floor	Wall and floor
Group	n/a
Pendulum Dry (4S)	0.24
Pendulum Wet (4S)	0.24
Pendulum Wet (TRL)	0-24

	Standard	Requirement	Established values
Petrographic description	EN 12407	Declared	Marble
Flexural strength	EN 12372	Declared	Arithmetic mean 23.2MPa
Water absorption at atmospheric pressure	EN 13755	Declared	Ave 0.16%
Apparent density	EN 1936	Declared	Ave 2723kg/m ³
Frost resistance	EN 12371		Pass
Thermal shock resistance	EN 14066		Pass
Reaction to fire	-	Floor/wall Class A1 FL/A1	Pass

Recycled content	%
Sampkin	7

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 - W: www.parkside.co.uk - E: info@parkside.co.uk