

Sancy

8 COLOURS / 1 SIZES / 2 FINISHES / 0 SPECIAL PIECES


Inspired by the continued trend of geometric shapes and available in multiple colours and finishes, Sancy is a hugely versatile range. Become your own designer and create exciting patterns unique to your own style. The versatility of our Sancy range allows you to create multiple laying patterns, play with pattern and colours to form something unique and coordinate with other tile ranges for a seamless finish.



Sancy



Sancy

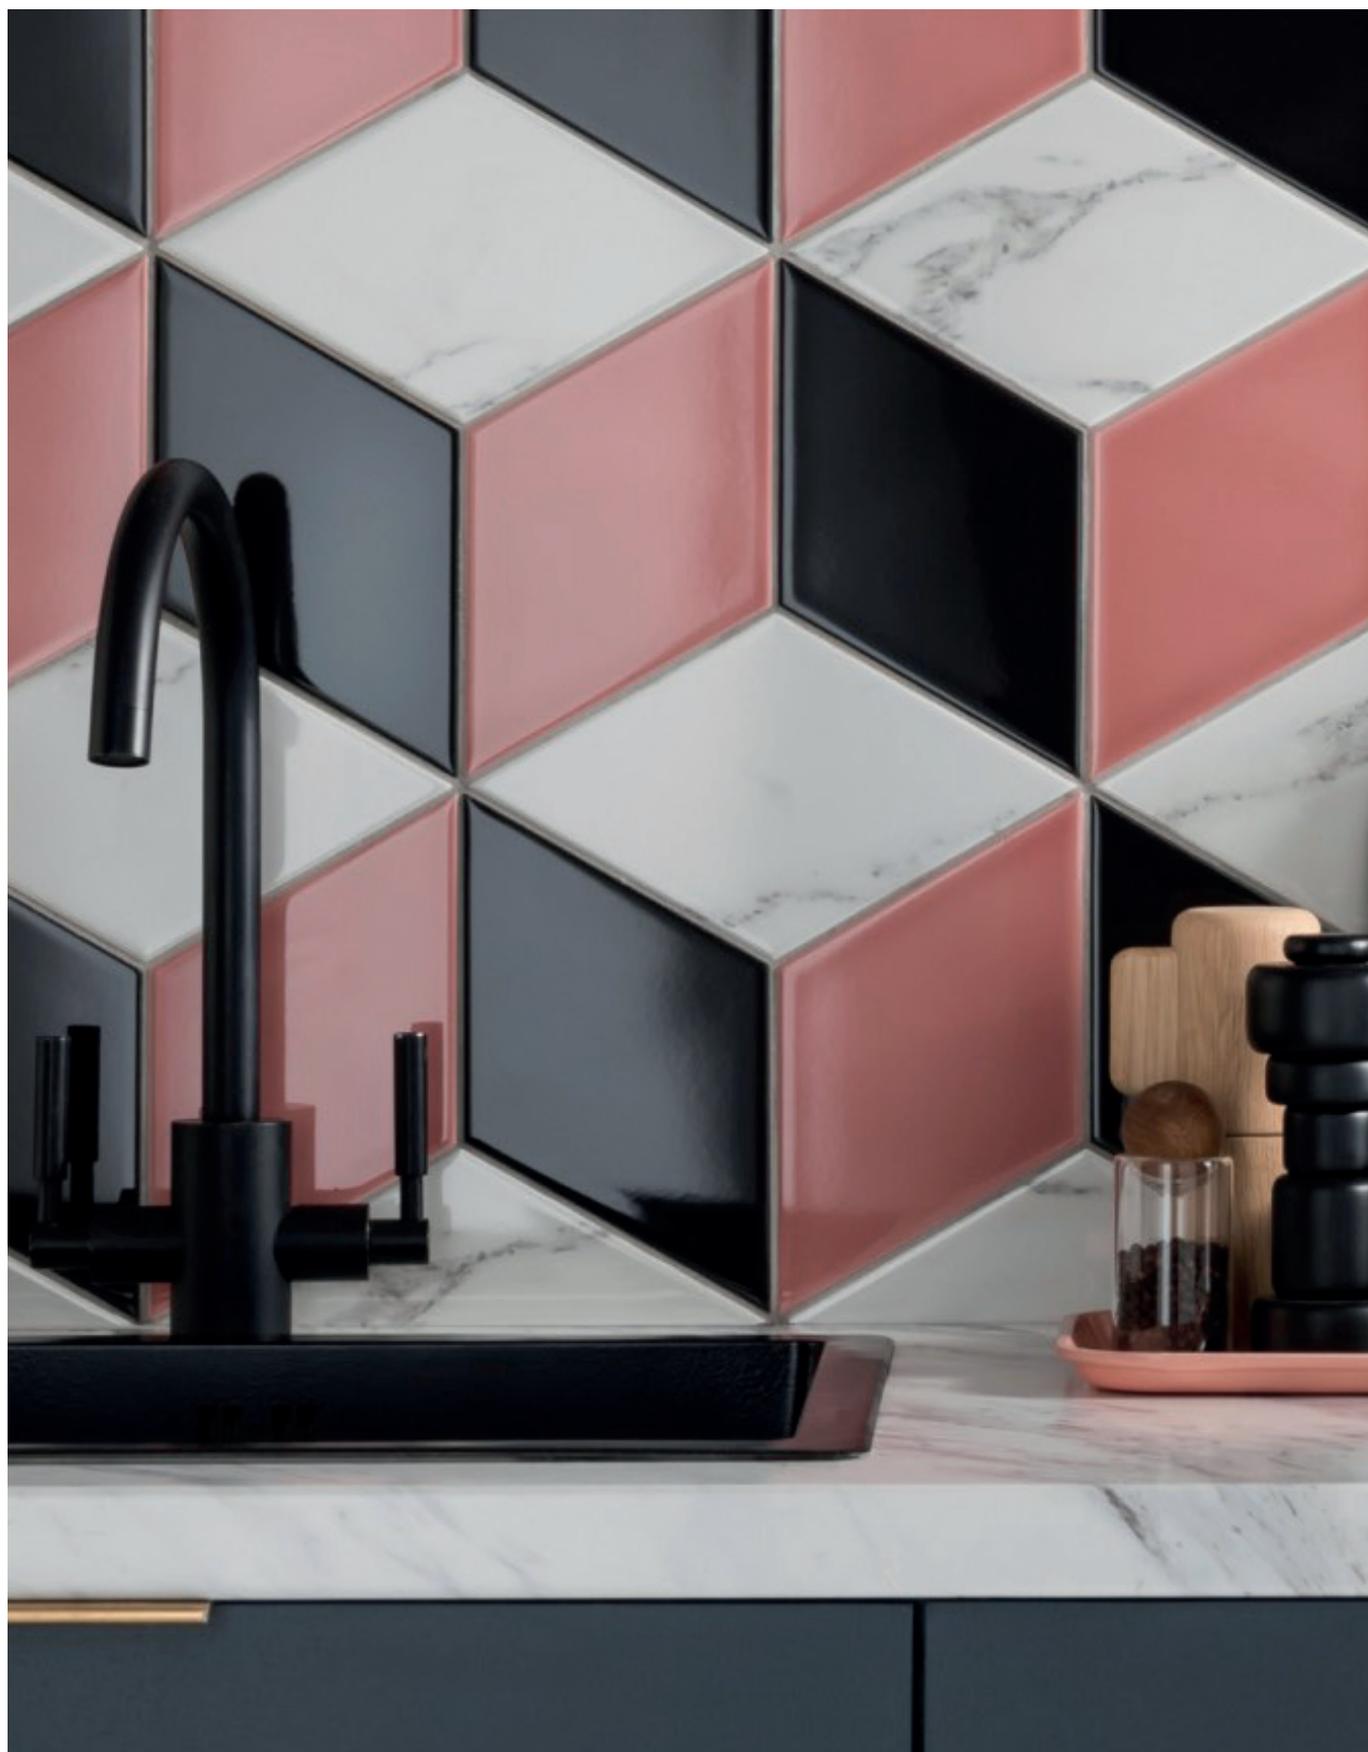

Sancy



WHITE

BLUSH

TEAL

CHARCOAL



GREY

MARBLE

OAK

METALLIC


Ceramic	9mm thick	9mm thick	Wall/floor
	Satin	Gloss	All tiles
256x149	✓	✓	Wall

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Sancy



256x149

GROUP / Bla - CERAMIC

Range	Standard	Requirement	Established Values
Length and width	ISO 10545-2	$\pm 0.5\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 10\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.3\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b > 10\%$	$E_b > 10\%$
Breaking strength	ISO 10545-4	$\geq 600\text{N}$	Ave $\geq 1000\text{N}$
Modulus of rupture	ISO 10545-4	Ave min 12 N/mm^2	Ave min 12 N/mm^2
Thermal shock resistance	ISO 10545-1	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB (except Metallics)
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to stain	ISO 10545-14	Min Class 3	Class 3
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled content	%
Sancy	39

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles